NOVOSENSE

NCA1044-Q1
High-speed CAN Transceiver with Standby Mode
Datasheet (EN) 1.2

Product Overview

The NCA1044-Q1 is a high-speed CAN transceiver that provides an interface between a Controller Area Network (CAN) protocol controller and the physical two-wire CAN bus. The NCA1044-Q1 implements the CAN physical layer as defined in ISO 11898-2-2024 and SAE J2284-1 to SAE J2284-5. This implementation enables reliable communication in the CAN FD fast phase at data rates up to 5 Mbit/s. The NCA1044-Q1 provides thermal protection and transmit data dominant time out function.

NCA1044-Q1 include CAN signal improvements significantly reduce signal ringing on the network, allowing reliable CAN FD communication at 5 Mbit/s in larger topologies.

Key Features

- Fully compatible with the ISO11898-2 standard
- Ideal passive behavior to the CAN bus when the supply voltage is off
- I/O voltage range supports 1.8V, 3.3V and 5V MCU
- Power supply voltage
- V_{IO}: 1.7V to 5.5V
- V_{CC}: 4.5V to 5.5V

  (For could pass VeLIO test part number Ⅱ, the parameters required by VeLIO are under the V_{CC} condition of 4.75V to 5.25V)
- Bus fault protection of -58V to +58V
- Short circuit protection
- Bus common-mode voltage of -12V to +12V
- Transmit data (TXD) dominant time out function
- Very low-current Standby mode with wake-up capability
- Over temperature protection
- Data rate: up to 5Mbps
- Low loop delay: <250ns
- Operation temperature: -40°C to +125°C
- AEC-Q100 qualified for automotive, Grade 1
- RoHS & REACH compliant

Applications

- CAN bus standards such as CANopen, DeviceNet, NMEA2000, ARNIC825, ISO11783 and CANaerospace
- Highly loaded CAN networks down to 10 kbps networks
- Automotive gateway
- Body control modules
- Advanced Driver Assistance Systems (ADAS)
- Infotainment system

Device Information

Part Number	*Package*	*Body Size*
NCA1044-Q1SPR Ⅰ	SOP8	4.90mm × 3.90mm
NCA1044-Q1DNR Ⅰ	DFN8	3.00mm × 3.00mm
NCA1044N-Q1SPR Ⅰ	SOP8	4.90mm × 3.90mm
NCA1044N-Q1DNR Ⅰ	DFN8	3.00mm × 3.00mm
NCA1044-Q1SPRH Ⅱ	SOP8	4.90mm × 3.90mm
NCA1044-Q1DNRH Ⅱ	DFN8	3.00mm × 3.00mm
NCA1044N-Q1SPRH Ⅱ	SOP8	4.90mm × 3.90mm
NCA1044N-Q1DNRH Ⅱ	DFN8	3.00mm × 3.00mm

Ⅰ Not VeLIO verified part number

Ⅱ Could pass VeLIO test part number

Functional Block Diagrams




Figure 1. NCA1044-Q1 Block Diagram




Figure 2. NCA1044N-Q1 Block Diagram

INDEX

1. PIN CONFIGURATION AND FUNCTIONS 3
2. ABSOLUTE MAXIMUM RATINGS 4
3. EMC RATINGS 5
4. RECOMMENDED OPERATING CONDITIONS 6
5. THERMAL INFORMATION 6
6. SPECIFICATIONS 7
6.1. Electrical Characteristics 7
6.2. Switching Electrical Characteristics 10
6.3. Parameter Measurement Information 12
7. FUNCTION DESCRIPTION 15
7.1. Overview 15
7.2. Functional Block Diagram 15
7.3. VIO Supply Pin 16
7.4. Device Operating Modes 16
7.4.1. Normal Mode 16
7.4.2. Standby Mode 16
7.5. Remote Wake-up 16
7.6. Fail-safe features 18
7.6.1. TXD Dominant Time-Out Function (TXD DTO) 18
7.6.2. Internal Biasing of TXD and STB Input Pins 18
7.6.3. Undervoltage Detection on Pins VCC and VIO 18
7.6.4. Unpowered Device 18
7.6.5. Over-Temperature Protection (OTP) 18
7.6.6. Short circuit protection 19
8. APPLICATION NOTE 20
8.1. Typical Application 20
9. PACKAGE INFORMATION 21
10. ORDERING INFORMATION 23
11. DOCUMENTATION SUPPORT 23
12. TAPE AND REEL INFORMATION 24
13. REVISION HISTORY 26

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

1. Pin Configuration and Functions

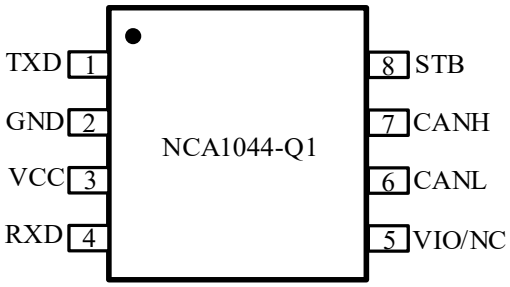


Figure 1-1 NCA1044(N)-Q1, SOP8 Package, Top view

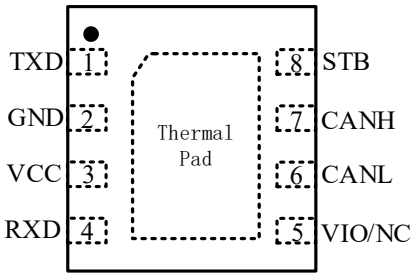


Figure 1-2 NCA1044(N)-Q1,DFN8 Package, Top view

Table 1-1 NCA1044-Q1 Pin Configuration and Description

NCA1044-Q1 PIN NO.	*NCA1044N-Q1 PIN NO.*	*SYMBOL*	*FUNCTION*
1	1	TXD	CAN transmit data input (LOW for dominant and HIGH for recessive bus states)
2	2	GND	Ground
3	3	VCC	Power Supply
4	4	RXD	CAN receive data output (LOW for dominant and HIGH for recessive bus states)
5	\	VIO	Logic I/O supply voltage
\	5	NC	No connection
6	6	CANL	Low-level CAN bus line
7	7	CANH	High-level CAN bus line
8	8	STB	STB (standby mode) select pin (active high)

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

2. Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)[1] [2].

Parameters	*Symbol*	*Min*	*Max*	*Unit*
Power Supply Voltage	VCC, VIO	-0.3	7	V
Logic I/O Voltage	TXD, RXD, STB	-0.3	7	V
Maximum bus Pin Voltage	V_{CANH}, V_{CANL}	-58	58	V
Voltage between pin CANH and pin CANL	V_{CANH} - V_{CANL}	-58	58	V
Junction temperature	T_J	-40	150	°C
Storage Temperature	T_{stg}	-65	150	°C

[1] Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to Absolute Maximum Rating condition for extended periods may affect device reliability.

[2] All voltage values, except for “Voltage between pin CANH and pin CANL”, are with respect to GND terminal.

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

3. EMC Ratings

Parameters	Ratings	Value	Unit	
Electrostatic discharge	Human Body Model (HBM), per AEC-Q100-002 ● CANH and CANL, to GND ● Other pins, to GND	 ±8 ±8	 kV kV	[I] Not VeLIO verified part number
	Human Body Model (HBM), per AEC-Q100-002 ● CANH and CANL, to GND Other pins, to GND	 ±6 ±6	 kV kV	[II] Could pass VeLIO test part number
	Charged Device Model (CDM), per AEC-Q100-011 ● All pins	 ±2	 kV	
	Machine Model (MM), per JESD22-A115C ● All pins	 ±400	 V	
	System, per IEC 61000 4 2 (150 pF, 330 Ω at pins CANH and CANL to GND	±8.0	kV	[I] Not VeLIO verified part number
	System, per IEC 61000 4 2 (150 pF, 330 Ω at pins CANH and CANL to GND	±3.0	kV	[II] Could pass VeLIO test part number
Electrical disturbances	Electrical transient conduction, per ISO 7637-2, on CANH and CANL ● Pulse 1 ● Pulse 2a ● Pulse 3a ● Pulse 3b	 -100 75 -150 100	 V V V V	

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

4. Recommended Operating Conditions

Parameters	Symbol	Min	Typ	Max	Unit	Comments
Power Supply Voltage	VCC	4.5	5	5.5	V	Scenarios other than VeLIO requirements
		4.75	5	5.25	V	the parameters required by VeLIO
I/O Level-Shifting Voltage	VIO	1.7	3.3	5.5	V	
Operating Temperature	T_{opr}	-40	-	125	°C	

5. Thermal Information

Parameters	Symbol	SOP8	DFN8	Unit
IC Junction-to-Air Thermal Resistance	$R_{\theta JA}$	120	52.8	°C /W
Junction-to-case (top) thermal resistance	$R_{\theta JC(top)}$	57.8	58.9	°C /W
Junction-to-board thermal resistance	$R_{\theta JB}$	64.2	25.2	°C /W

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

6. Specifications

6.1. Electrical Characteristics

V_{CC}=4.5V to 5.5V[6], V_{IO}=1.7 to 5.5V [1], Ta=-40°C to 125°C. Unless otherwise noted, Typical values are at V_{CC}=5V, V_{IO}=3.3V, R_L=60Ω, Ta = 25°C.

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
Supply; pin VCC						
V_{CC}	Supply voltage		4.5	-	5.5	V
I_{CC}	Supply current	Normal mode, recessive, V_{TXD}=V_{IO} [2], V_{STB}=0V	-	5	7	mA
		Normal mode, dominant, V_{TXD} =0V	-	45	60	mA
		Normal mode, dominant, V_{TXD} =0, short circuit on bus lines, -3V < (V_{CANH} = V_{CANL}) <18V	-	-	110	mA
		Standby mode, V_{TXD} =V_{IO}, NCA1044-Q1	-	0.7	2	μA
		Standby mode, V_{TXD} =V_{CC}, NCA1044N-Q1	-	13.5	20	μA
$V_{uvd(VCC)}$	Undervoltage detection voltage on pin VCC	Rising	4	4.26	4.5	V
		Falling	4	4.17	4.5	V
I/O level adapter supply; pin V_{IO}; only for NCA1044-Q1						
V_{IO}	Supply voltage on pin VIO		1.7	-	5.5	V
I_{IO}	Supply current on pin VIO	Normal mode, recessive, V_{TXD}=V_{IO}	-	60	200	μA
		Normal mode, dominant, V_{TXD}=0V	-	175	360	μA
		Standby mode; V_{TXD}=V_{IO}	-	11	19	μA
$V_{uvd(VIO)}$	Undervoltage detection voltage on pin VIO	Rising	1.4	1.56	1.7	V
		Falling	1.4	1.50	1.7	V
Standby mode control input; pin STB						
V_{IH}	High level input voltage	NCA1044-Q1	0.7*V_{IO}	-	V_{IO}+0.3	V
		NCA1044N-Q1	2.0	-	V_{CC}+0.3	V
V_{IL}	Low level input voltage	NCA1044-Q1	-0.3	-	0.3*V_{IO}	V
		NCA1044N-Q1	-0.3	-	0.8	V
R_{pu}	Pull-up resistance		40	55	80	kΩ
CAN transmit data input; pin TXD						

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

V_{IH}	High level input voltage	NCA1044-Q1	0.7*V_{IO}	-	V_{IO}+0.3	V
		NCA1044N-Q1	2.0	-	V_{CC}+0.3	V
V_{IL}	Low level input voltage	NCA1044-Q1	-0.3	-	0.3*V_{IO}	V
		NCA1044N-Q1	-0.3	-	0.8	V
R_{pu}	Pull-up resistance		40	55	80	kΩ
C_i	Input capacitance	[3]	-	5	10	pF
CAN receive data output; pin RXD						
I_{OH}	High level output current	V_{RXD} = V_{IO} - 0.4V [2]	-10	-3.5	-1	mA
I_{OL}	Low level output current	V_{RXD} = 0.4V; bus dominant	1	3.5	10	mA
Bus lines; pins CANH and CANL; Driver						
$V_{OH(D)}$	CANH output voltage (Dominant)	V_{TXD} =0V, R_L =50Ω to 65Ω[4]	2.75	3.6	4.5	V
$V_{OL(D)}$	CANL output voltage (Dominant)	V_{TXD} =0V, R_L =50Ω to 65Ω[4]	0.5	1.4	2.25	V
$V_{OH(R)}$	CANH output voltage (Recessive)	Normal mode, no load[4]	2.0	0.5*V_{CC}	3.0	V
		Standby mode, no load[4]	-0.1	-	0.1	V
$V_{OL(R)}$	CANL output voltage (Recessive)	Normal mode, no load[4]	2.0	0.5*V_{CC}	3.0	V
		Standby mode, no load[4]	-0.1	-	0.1	V
$V_{OD(D)}$	Differential output voltage (Dominant)	Normal mode				
		R_L = 50Ω to 65Ω[4]	1.5	-	3.0	V
		R_L = 45Ω to 70Ω[4]	1.4	-	3.3	V
		R_L = 2240Ω[4]	1.5	-	5.0	V
$V_{OD(R)}$	Differential output voltage (Recessive)	Normal mode, no load[4]	-50	-	50	mV
		Standby mode, no Load[4]	-0.2	-	0.2	V
V_{TXsym}	Transmitter voltage symmetry	V_{TXsym} = V_{CANH} + V_{CANL}, [3] f_{TXD} = 1MHz, R_L =60Ω, C_{SPLIT} = 4.7nF, V_{CC} = 4.75V to 5.25V[4] [5]	0.9*V_{CC}	-	1.1*V_{CC}	V
$I_{OSH(R)}$	CANH short-circuit output current, recessive	Normal mode, V_{CANH} = V_{CANL} = -27V to 32V	-2	-	2	mA
$I_{OSL(R)}$	CANL short-circuit output current, recessive	Normal mode, V_{CANH} = V_{CANL} = -27V to 32V	-2	-	2	mA

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

$I_{OSH(D)}$	CANH short-circuit output current, dominant	Normal mode, V_{CANH} = -15V to 40V, CANL open[4]	-100	-	100	mA
$I_{OSL(D)}$	CANL short-circuit output current, dominant	Normal mode, V_{CANL} = -15V to 40V, CANH open[4]	-100	-	100	mA
Bus lines; pins CANH and CANL; Receiver						
$V_{ID(R)}$	Differential input threshold voltage, recessive	-12V < V_{CANH} < 12V, -12V < V_{CANL} < 12V				
		Normal mode[4]	0.5	-	0.9	V
		Standby mode[4]	0.4	-	1.15	V
$V_{ID(D)}$	Differential input threshold voltage, dominant	-12V < V_{CANH} < 12V, -12V < V_{CANL} < 12V				
		Normal mode[4]	0.5	-	0.9	V
		Standby mode[4]	0.4	-	1.15	V
$V_{ID(hys)}$	Differential input hysteresis voltage	-12V < V_{CANH} < 12V, -12V < V_{CANL} < 12V, Normal mode	-	50	100	mV
$V_{RX(R)}$	Receiver recessive voltage	-12V < V_{CANH} < 12V, -12V < V_{CANL} < 12V				
		Normal mode[3]	-4	-	0.5	V
		Standby mode[3]	-4	-	0.4	V
$V_{RX(D)}$	Receiver dominant voltage	-12V < V_{CANH} < 12V, -12V < V_{CANL} < 12V				
		Normal mode[3]	0.9	-	9	V
		Standby mode[3]	1.15	-	9	V
$I_{LKG(OFF)}$	Power-off (unpowered) bus input leakage current	V_{CANH} = V_{CANL} = 5V, V_{CC} = V_{IO} = 0V[4]	-10	-	10	μA
R_I	Input resistance	-2V ≤ V_{CANH} ≤ 7V, -2V ≤V_{CANL} ≤ 7V [4]	25	40	50	kΩ
$R_{I(match)}$	Input resistance matching	V_{CANH} = 5V, V_{CANL} = 5V, $R_{I(match)}$=2*(R_{CANH}-R_{CANL}) /(R_{CANH}+R_{CANL})	-3	-	3	%
R_{ID}	Differential input resistance	-2V ≤ V_{CANH} ≤ 7V, -2V ≤V_{CANL} ≤ 7V, R_{ID}=R_{CANH}+R_{CANL} [4]	50	80	100	kΩ
C_I	Input capacitance to ground	CANH or CANL[3]	-	-	30	pF
C_{ID}	Differential input	[3]	-	-	15	pF
Temperature detection						

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

T_{SD}	Thermal shutdown threshold	[3]	-	193	-	°C
$T_{SD(hys)}$	Thermal shutdown hysteresis	[3]	-	11	-	°C

[1] Only NCA1044-Q1 has a VIO pin. For NCA1044N-Q1, the VIO input is internally connected to VCC.

[2] V_{IO}=V_{CC} for the version without VIO pin.

[3] Not tested in production; guaranteed by design.

[4] Required in ISO 11898-2-2024.

[5] The test circuit used to measure the bus output voltage symmetry (which includes C_{SPLIT}) is shown in Figure 6-3.

[6] For Ⅱcould pass VeLIO test part number, the parameters required by VeLIO are under the VCC condition of 4.75V to 5.25V.

6.2. Switching Electrical Characteristics

V_{CC} =4.5V~5.5V[4], V_{IO}=1.7~5.5V[1], Ta=-40°C to 125°C. Unless otherwise noted, Typical values are at V_{CC} = 5V, V_{IO} = 3.3V, R_L=60Ω, Ta = 25°C.

Symbol	*Parameters*	*Comments*	*Min*	*Typ*	*Max*	*Unit*
Driver						
$t_{d(TXD-bus, dom)}$	Delay time from TXD to bus dominant	Normal mode[2]	-	40	140	ns
$t_{d(TXD-bus, rec)}$	Delay time from TXD to bus recessive	Normal mode[2]	-	65	140	ns
$t_{bit(bus)}$	Transmitted recessive bit width	$t_{bit(TXD)}$ = 500 ns	450	-	530	ns
		$t_{bit(TXD)}$ = 200 ns	155	-	210	ns
dv/dt	Bus differential voltage change rate	Normal mode[2]			47	V/μs
Receiver						
$t_{d(bus-RXD, dom)}$	Delay time from bus to RXD dominant	[3]	-	90	140	ns
$t_{d(bus-RXD, rec)}$	Delay time from bus to RXD recessive	[3]	-	80	140	ns
$t_{d(TXD-RXD, dom)}$	Delay time from TXD to RXD dominant	Normal mode[3]	-	130	255	ns
$t_{d(TXD-RXD, rec)}$	Delay time from TXD to RXD recessive	Normal mode[3]	-	145	255	ns
$t_{bit(RXD)}$	Bit time on pin RXD	$t_{bit(TXD)}$ = 500 ns	400	-	550	ns
		$t_{bit(TXD)}$ = 200 ns	120	-	220	ns
CAN FD timing characteristics						
Δt_{rec}	Receiver timing symmetry	$\Delta t_{rec} = t_{bit(RXD)} - t_{bit(bus)}$ [3]				
		$t_{bit(TXD)}$ = 500 ns	-50	-	20	ns
		$t_{bit(TXD)}$ = 200 ns	-45	-	15	ns

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

Dominant time-out time; pin TXD						
$t_{to(dom)TXD}$	TXD dominant time-out time	Normal mode[3]	0.8	2.8	5	ms
Bus wake-up time; pins CANH, CANL						
$t_{wake(bus, dom)}$	Bus dominant wake-up time	Standby mode [3]	0.5	-	1.8	μs
$t_{wake(bus, rec)}$	Bus recessive wake-up time	Standby mode[3]	0.5	-	1.8	μs
$t_{to(wake)bus}$	Bus wake-up time out	Standby mode[3]	0.8	-	9	ms
$t_{filtr(wake)bus}$	Bus wake-up filter time	Standby mode [3]	-	-	1.8	μs
Mode transition						
$t_{d(stb-norm)}$	Standby to normal mode delay time	[2]	-	-	47	μs
$t_{startup(RXD)}$	RXD start-up time	After wake-up detected[2]	-	-	50	μs

[1] Only NCA1044-Q1 has a VIO pin. For NCA1044N-Q1, the VIO input is internally connected to VCC.

[2] Ⅰ Not VeLIO verified part number, not tested in production; guaranteed by design.

[3] Required in ISO 11898-2-2024.

[4] For Ⅱ could pass VeLIO test part number, the parameters required by VeLIO are under the VCC condition of 4.75V to 5.25V.

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

6.3. Parameter Measurement Information

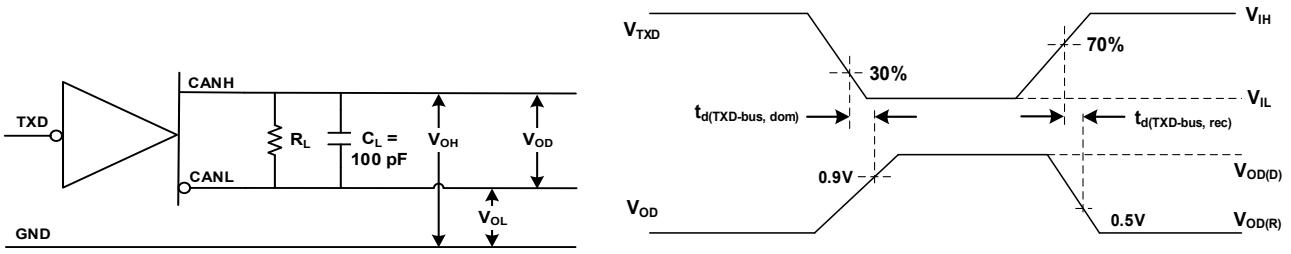


Figure 6-1 Driver Test Circuit and Voltage Waveforms[1]

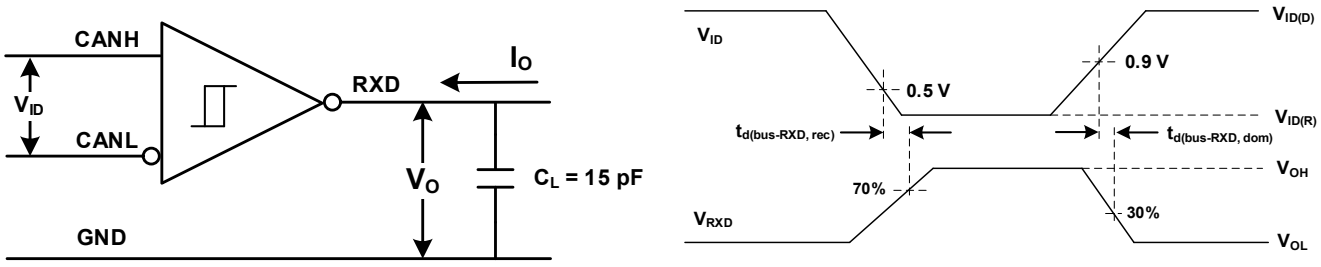


Figure 6-2 Receiver Test Circuit and Voltage Waveforms

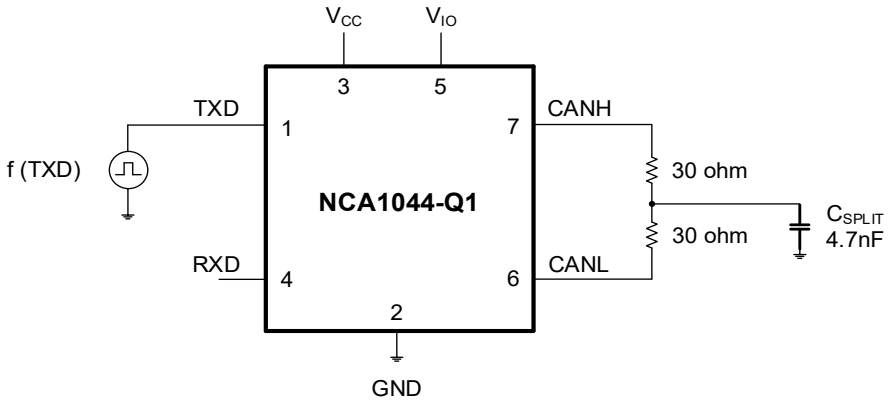


Figure 6-3 Transceiver Driver Symmetry Test Circuit

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

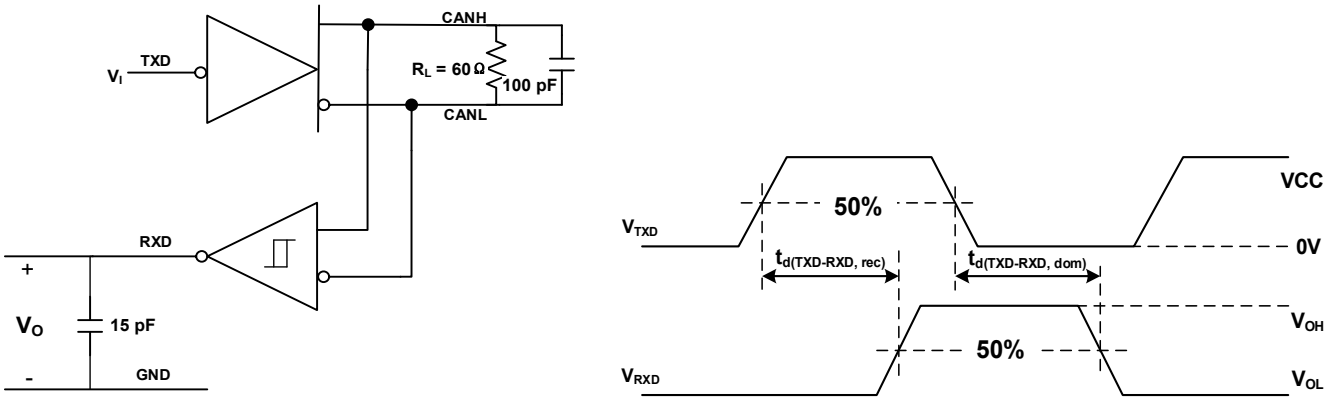


Figure 6-4 Loop Time Test Circuit and Voltage Waveforms

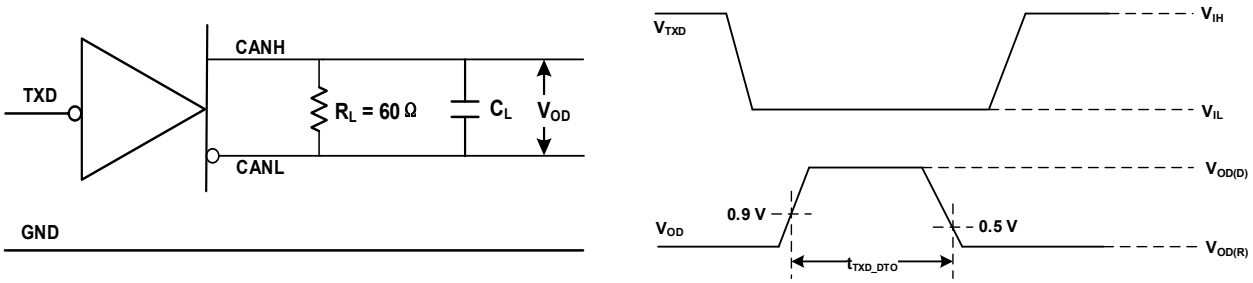


Figure 6-5 TXD Dominant Time-out Test Circuit and Voltage Waveforms

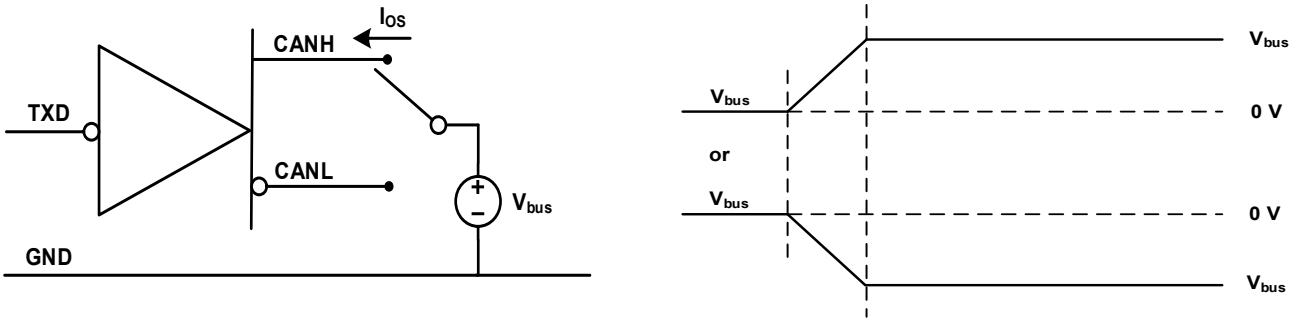


Figure 6-6 Driver Short-Circuit Current Test Circuit and Waveforms

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

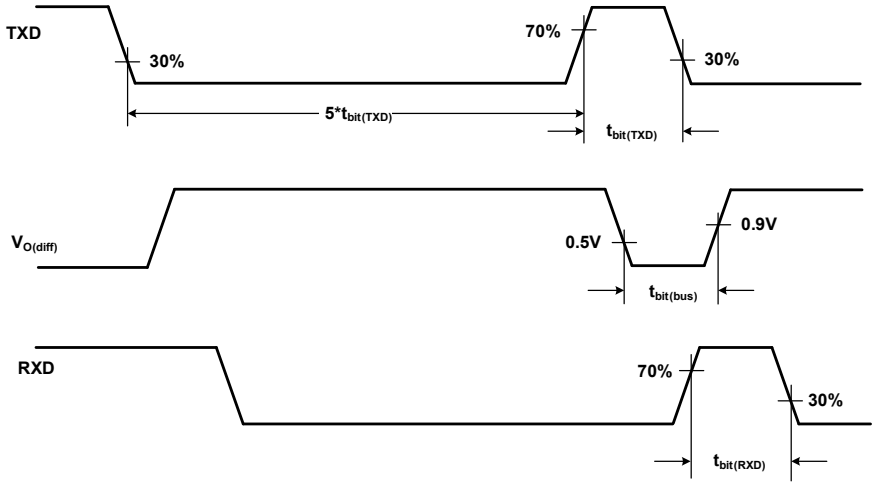


Figure 6-7 $t_{bit(RXD)}$ Test Circuit and Waveforms[1]

[1] For NCA1044N-Q1, TXD high level is set as 2.0V instead, and TXD low level 0.8V instead.

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

7. Function Description

7.1. Overview

The NCA1044-Q1 is a CAN transceiver which fully compatible with the ISO11898-2 standard. The data rate of the NCA1044-Q1 is up to 5Mbps, and it can support up to 110 CAN nodes. Meanwhile, the maximum transmission rate of the CAN bus is limited by the bus load, the quantity of nodes, the cable length, and other factors. The NCA1044-Q1 has a ±30V input common-mode range, enabling reliable communication between bus nodes with large ground potential deviations. NCA1044-Q1 has a low-current standby mode with CAN BUS waked-up capability.

Comprehensive protection features are designed to enhance the device and network robustness in harsh operating conditions. The transmit data dominant time-out function prevents the bus from lock-up by the faults on micro-controller. Moreover, the NCA1044-Q1 provides thermal protection and short-circuit protection.

7.2. Functional Block Diagram

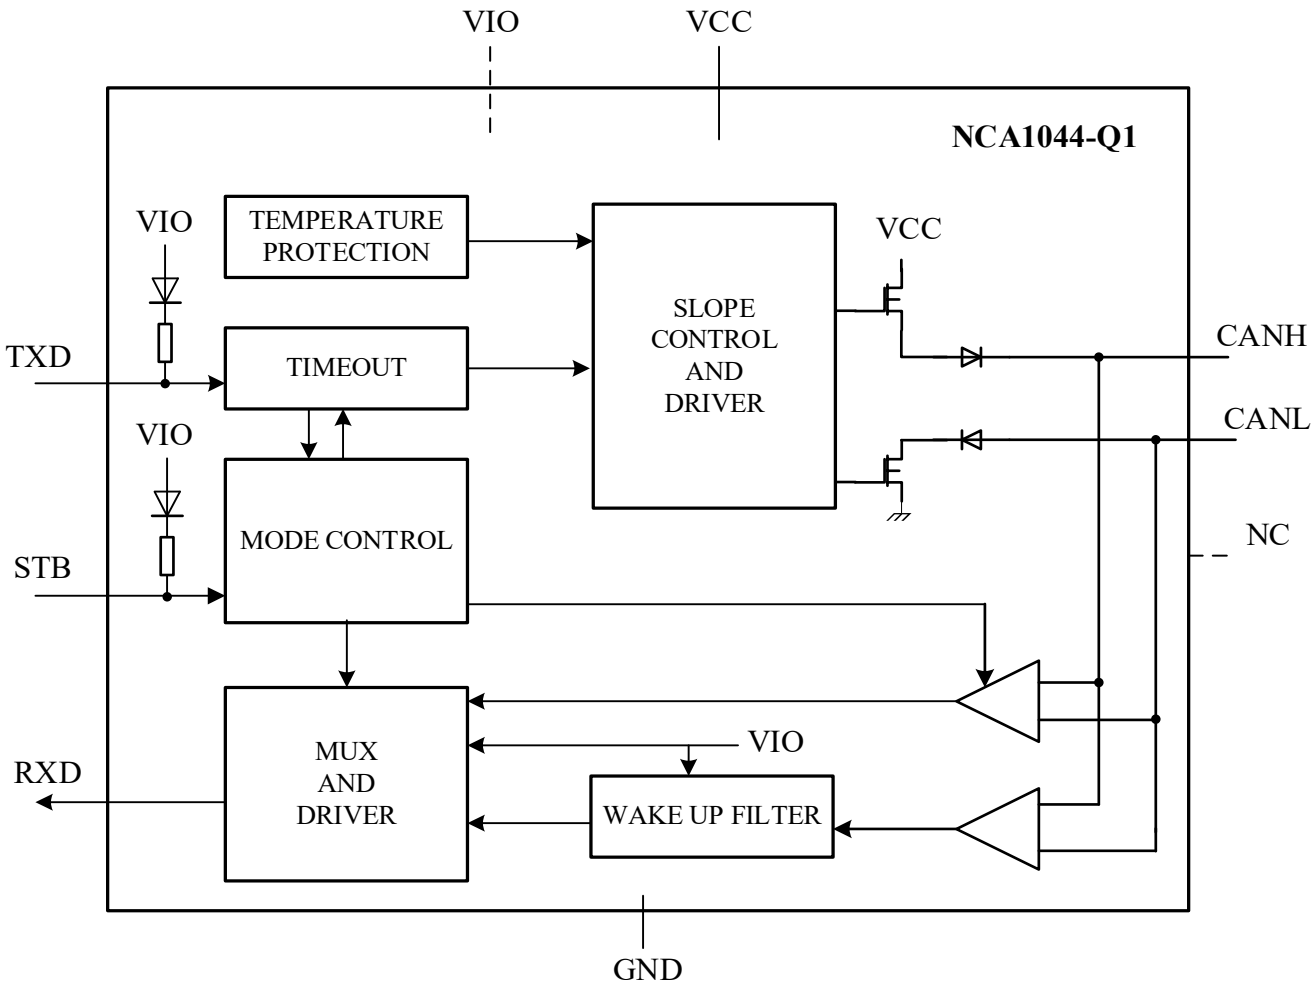


Figure 7-1 Block diagram of NCA1044-Q1

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

7.3. VIO Supply Pin

Two versions of the NCA1044-Q1 are available, only differing in the function of a single pin. Pin 5 is either a VIO supply pin or a NC pin.

Pin VIO should be connected to the microcontroller supply voltage (see Figure 8-1). This will adjust the signal levels of pins TXD, RXD and STB to the I/O levels of the microcontroller. Pin VIO also provides the internal supply voltage for the low-power differential receiver of the transceiver. For applications running in low-power mode, this allows the bus lines to be monitored for activity even if there is no supply voltage on pin VCC.

For versions of the NCA1044N-Q1 without a VIO pin, the VIO input is internally connected to VCC. This sets the signal levels of pins TXD, RXD and STB to levels compatible with 5 V microcontrollers.

7.4. Device Operating Modes

The device has two main operating modes: Normal mode and Standby mode. Operating mode is selected via the STB input pin. Table 7-1 shows a description of the operating modes under normal supply conditions.

Table 7-1 Operating Modes

Mode	STB pin	TXD pin	CAN driver	RXD pin
Normal	LOW	LOW	dominant	LOW
		HIGH	recessive	LOW when bus dominant
				HIGH when bus recessive
Standby	HIGH	X	GND	Follow bus when wake-up detected
				HIGH when no wake-up detected

7.4.1. Normal Mode

A LOW level on pin STB selects Normal mode. In this mode, the transceiver can transmit and receive data via the bus lines CANH and CANL (see Figure 7-1). The differential receiver converts the analog data on the bus lines into digital data which is output to pin RXD. The slopes of the output signals on the bus lines are controlled internally and are optimized in a way that guarantees the lowest possible Electromagnetic Emission (EME).

After entering normal mode, it is recommended to firstly pull up TXD pin to a high level for at least 200ns before communications, for fear of unwanted TXD timeout caused by unstable TXD level during the power-on phase.

7.4.2. Standby Mode

A HIGH level on pin STB selects Standby mode. In Standby mode, the transceiver is not able to transmit or correctly receive data via the bus lines. The transmitter and Normal-mode receiver blocks are switched off to reduce supply current, and only a low-power differential receiver monitors the bus lines for activity. The wake-up filter on the output of the low-power receiver does not latch bus dominant states, but ensures that only bus dominant and bus recessive states that persist longer than $t_{fltr(wake)bus}$ are reflected on pin RXD.

In Standby mode, the bus lines are biased to ground to minimize the system supply current. The low-power receiver is supplied by V_{IO}, and is capable of detecting CAN bus activity even if V_{IO} is the only supply voltage available. When pin RXD goes LOW to signal a wake-up request, a transition to Normal mode will not be triggered until STB is forced LOW.

7.5. Remote Wake-up

The NCA1044-Q1 wakes up from Standby mode when a dedicated wake-up pattern is detected on the bus (see Figure 7-2). This filtering helps avoid spurious wake-up events. A spurious wake-up sequence could be triggered by, for example, a dominant clamped bus or by dominant phases due to noise or spikes on the bus. The wake-up pattern must have a complete dominant-recessive-dominant pattern, in which the dominant phase at least has $t_{wake(bus, dom)}$ and the recessive phase at least has $t_{wake(bus, rec)}$, otherwise it will be ignored.

The complete dominant-recessive-dominant pattern must be received within $t_{to(wake)bus}$ to be recognized as a valid wake-up pattern. Otherwise, the internal wake-up logic is reset. The complete wake-up pattern will then need to be retransmitted to trigger a wake-up event. Pin RXD remains HIGH until the wake-up event has been triggered.

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

After a wake-up sequence has been detected, the NCA1044-Q1 will remain in Standby mode with the bus signals reflected on RXD after 50µs. During this 50µs, the low-power receiver is on but pin RXD is not active (i.e. HIGH/recessive). The first dominant pulse width ≥ $t_{fltr(wake)bus}$ that ends after the 50µs will trigger RXD to go LOW/dominant. Note that dominant or recessive phases lasting less than $t_{fltr(wake)bus}$ will not be detected by the low-power differential receiver and will not be reflected on RXD in Standby mode.

A wake-up event is not flagged on RXD if any of the following events occurs while a valid wake-up pattern is being received:

- The NCA1044-Q1 switches to Normal mode.
- The complete wake-up pattern was not received within $t_{to(wake)bus}$.
- A VCC or VIO undervoltage is detected (VCC < $V_{uvd(VCC)}$ or VIO < $V_{uvd(VIO)}$; see Section 7.6.3).

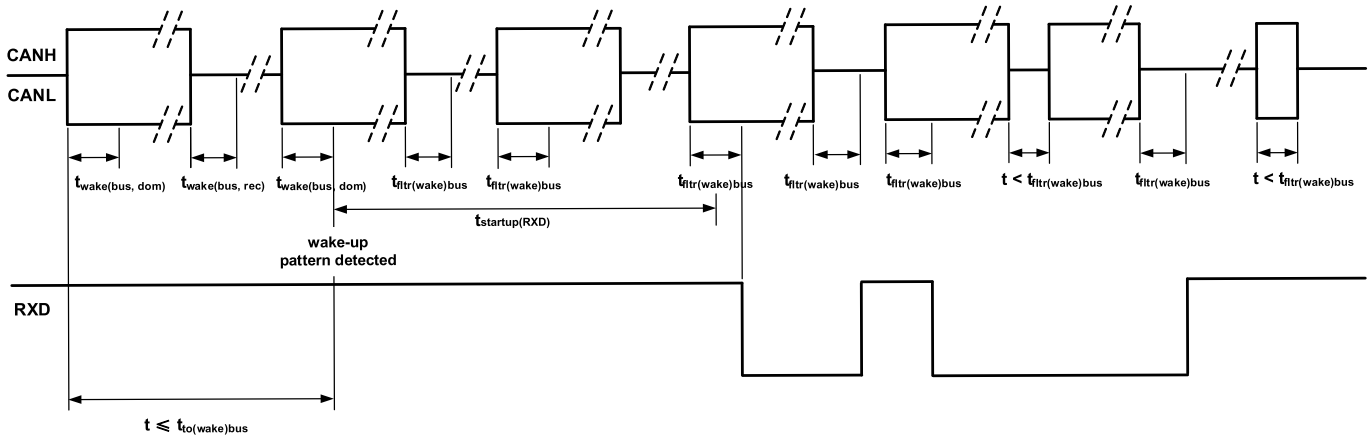


Figure 7-2 Wake-Up Timing

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

7.6. Fail-safe features

7.6.1.TXD Dominant Time-Out Function (TXD DTO)

A 'TXD dominant time-out' timer circuit prevents the bus lines from being driven to a permanent dominant state (blocking all network communication) if pin TXD is forced permanently LOW by a hardware and/or software application failure. The timer is triggered by a negative edge on pin TXD.

If the duration of the LOW level on pin TXD exceeds the internal timer value $t_{to(dom)TXD}$, the transmitter is disabled, driving the bus lines into a recessive state. The timer is reset by a positive edge on pin TXD. The TXD dominant time-out time also defines the minimum possible bit rate of 10 kbit/s.

7.6.2.Internal Biasing of TXD and STB Input Pins

Pins TXD and STB have internal pull-ups to VIO to ensure a safe, defined state, in case one or both of these pins are left floating. Pull-up currents flow in these pins in all states; both pins should be held HIGH in Standby mode to minimize standby current.

7.6.3.Undervoltage Detection on Pins VCC and VIO

The supply terminals have undervoltage detection that places the device in protected mode. This protects the bus during an undervoltage event on either the VCC or VIO supply terminals. When VCC drop below the VCC undervoltage detection level, $V_{uvd(VCC)}$, the transceiver will switch to Standby mode. The logic state of pin STB will be ignored until VCC has recovered. When VIO drop below the VIO undervoltage detection level, $V_{uvd(VIO)}$, the transceiver will switch off and disengage from the bus (zero load) until VIO has recovered.

After an undervoltage condition is cleared and the supplies have returned to valid levels, the device typically resumes normal operation within 50 µs.

Table 7-2 Undervoltage Lockout 5V Only Devices (NCA1044N-Q1)

VCC	Device State	Bus Output	RXD
>UV_{VCC}	Normal	Per TXD	Mirrors Bus[1]
<UV_{VCC}	Off	High Impedance	High Impedance

[1] Mirrors bus state: low if CAN bus is dominant, high if CAN bus is recessive.

Table 7-3 Undervoltage Lockout I/O Level Shifting Devices (NCA1044-Q1)

VCC	VIO	Device State	Bus Output	RXD
>UV_{VCC}	>UV_{VIO}	Normal	Per TXD	Mirrors Bus[1]
<UV_{VCC}	>UV_{VIO}	Standby Mode	GND	Bus Wake RXD Request[2]
>UV_{VCC}	<UV_{VIO}	Off	High Impedance	High Impedance
<UV_{VCC}	<UV_{VIO}	Off	High Impedance	High Impedance

[1] Mirrors bus state: low if CAN bus is dominant, high if CAN bus is recessive.

[2] Refer to Section 7.5.

7.6.4.Unpowered Device

The device is designed to be 'ideal passive' or 'no load' to the CAN bus if it is unpowered. The bus terminals (CANH, CANL) have extremely low leakage currents when the device is unpowered to avoid loading down the bus. This is critical if some nodes of the network are unpowered while the rest of the of network remains in operation. The logic terminals also have extremely low leakage currents when the device is unpowered to avoid loading down other circuits that may remain powered.

7.6.5.Over-Temperature Protection (OTP)

The output drivers are protected against over-temperature conditions. If the virtual junction temperature exceeds the shutdown junction temperature T_{SD}, the output drivers will be disabled until the virtual junction temperature becomes lower than T_{SD} and TXD becomes recessive again. By including the TXD condition, the occurrence of output driver oscillation due to temperature drifts is avoided.

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

7.6.6.Short circuit protection

The current limiting circuit of the CANH and CANL can protect the transceiver from damage when they are short to GND or a supply voltage during communication. If the device heats up to over temperature threshold due to a continuous short on the CANH or CANL, the internal overtemperature protection switches off the bus transmitter.

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

8. Application Note

8.1. Typical Application

The NCA1044-Q1 requires a 0.1 μF bypass capacitors between VCC and GND. The capacitor should be placed as close as possible to the package. The Figure 8-1 and Figure 8-2 are the typical applications of NCA1044-Q1.

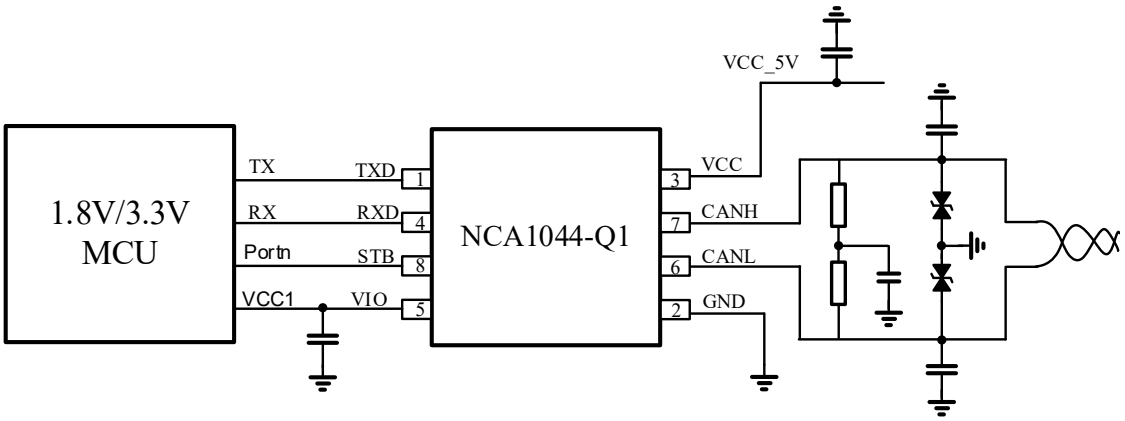


Figure 8-1 Typical CAN Bus Application Using 1.8V/3.3V CAN Controller


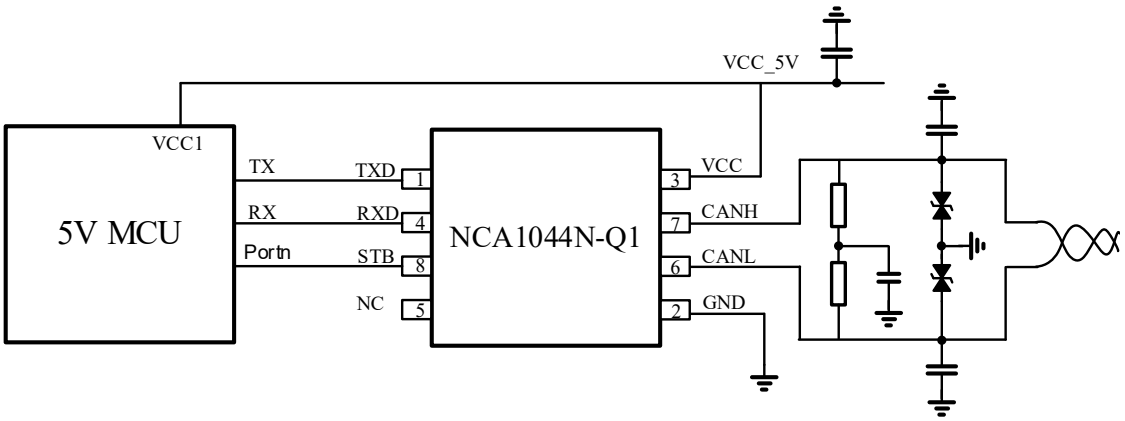


Figure 8-2 Typical CAN Bus Application Using 5V CAN Controller

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

9. Package Information

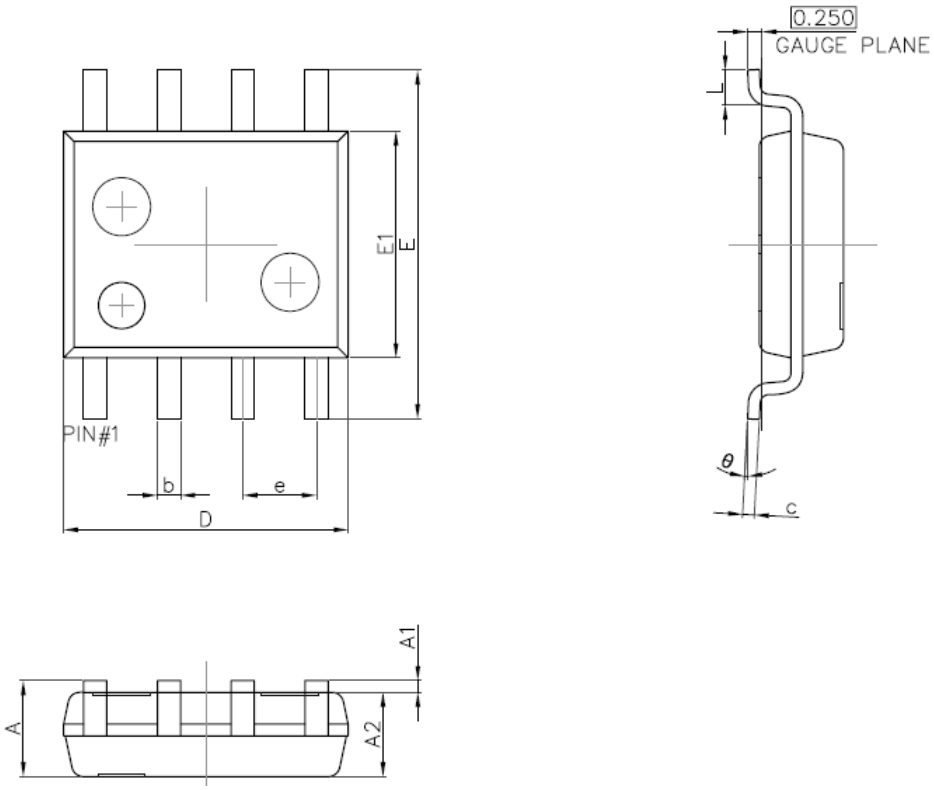


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.450	1.750	0.057	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Figure 9-1 SOP8 Package Shape and Dimension

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

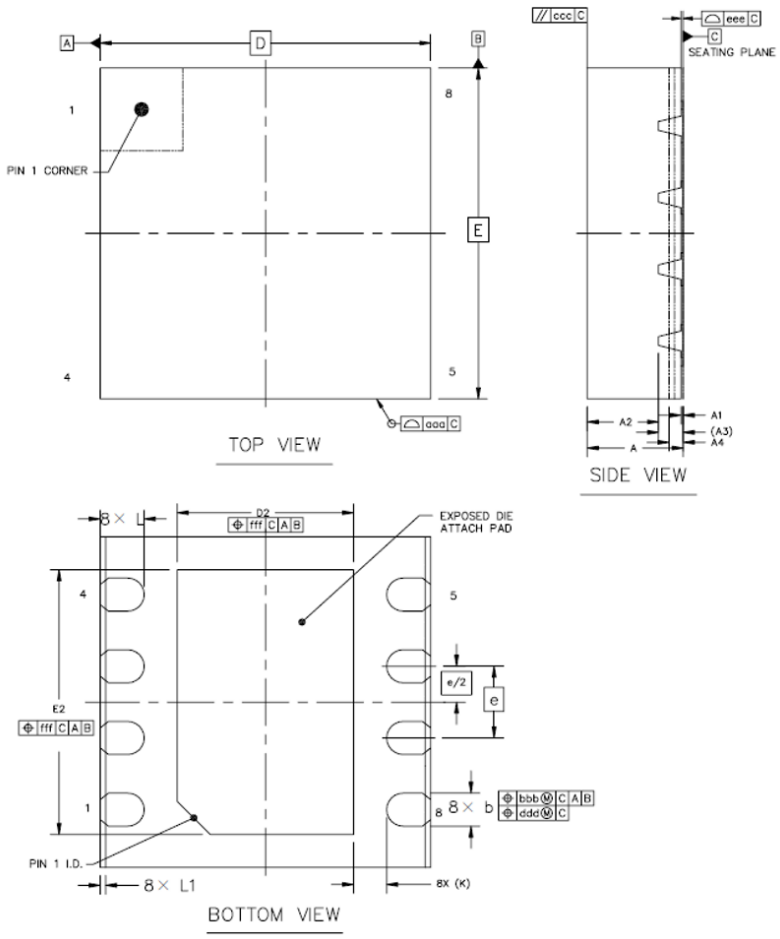

		SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS		A	0.80	0.85	0.90
STAND OFF		A1	0	0.02	0.0500
MOLD THICKNESS		A2	---	0.6	---
L/F THICKNESS		A3		0.203 REF	
SIDE WETTABLE DEPTH		A4	0.075	---	0.18
BODY SIZE	X	D		3 BSC	
	Y	E		3 BSC	
LEAD WIDTH		b	0.25	0.30	0.35
LEAD PITCH		e		0.65 BSC	
EP SIZE	X	D2	1.5	1.6	1.7
	Y	E2	2.3	2.4	2.5
LEAD LENGTH		L	0.35	0.4	0.45
SIDE WETTABLE WIDTH		L1	0.01	---	0.09
LEAD TIP TO EXPOSED PAD EDGE		K		0.3 REF	
PACKAGE EDGE TOLERANCE		aaa		0.1000	
MOLD FLATNESS		ccc		0.1000	
COPLANARITY		eee		0.0800	
LEAD OFFSET		bbb		0.1000	
		ddd		0.0500	
EXPOSED PAD OFFSET		fff		0.1000	

Figure 9-2 DFN8 Package Shape and Dimension

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

10. Ordering Information

Part Number	Operation Temperature	MSL	Package Type	SPQ
NCA1044-Q1SPR[I]	-40 to 125°C	3	SOP8	2500
NCA1044-Q1DNR[I]	-40 to 125°C	2	DFN8	6000
NCA1044N-Q1SPR[I]	-40 to 125°C	3	SOP8	2500
NCA1044N-Q1DNR[I]	-40 to 125°C	2	DFN8	6000
NCA1044-Q1SPRH[II]	-40 to 125°C	3	SOP8	2500
NCA1044-Q1DNRH[II]	-40 to 125°C	2	DFN8	6000
NCA1044N-Q1SPRH[II]	-40 to 125°C	3	SOP8	2500
NCA1044N-Q1DNRH[II]	-40 to 125°C	2	DFN8	6000

[I] Not VeLIO verified part number

[II] Could pass VeLIO test part number

11. Documentation Support

Part Number	Product Folder	Datasheet	Technical Documents
NCA1044-Q1	Click here	Click here	Click here

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

12. Tape and Reel Information


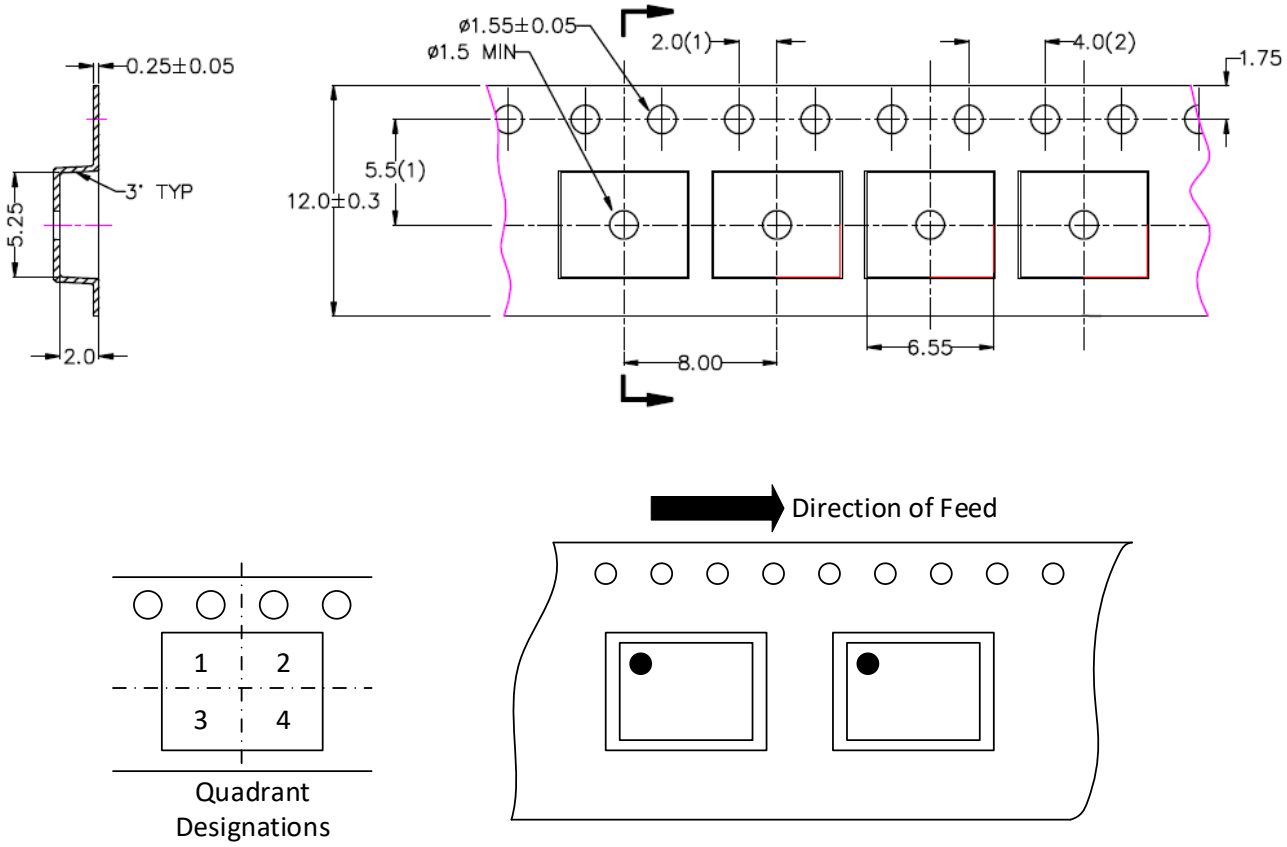


Figure 12-1 Tape Information of SOP8

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

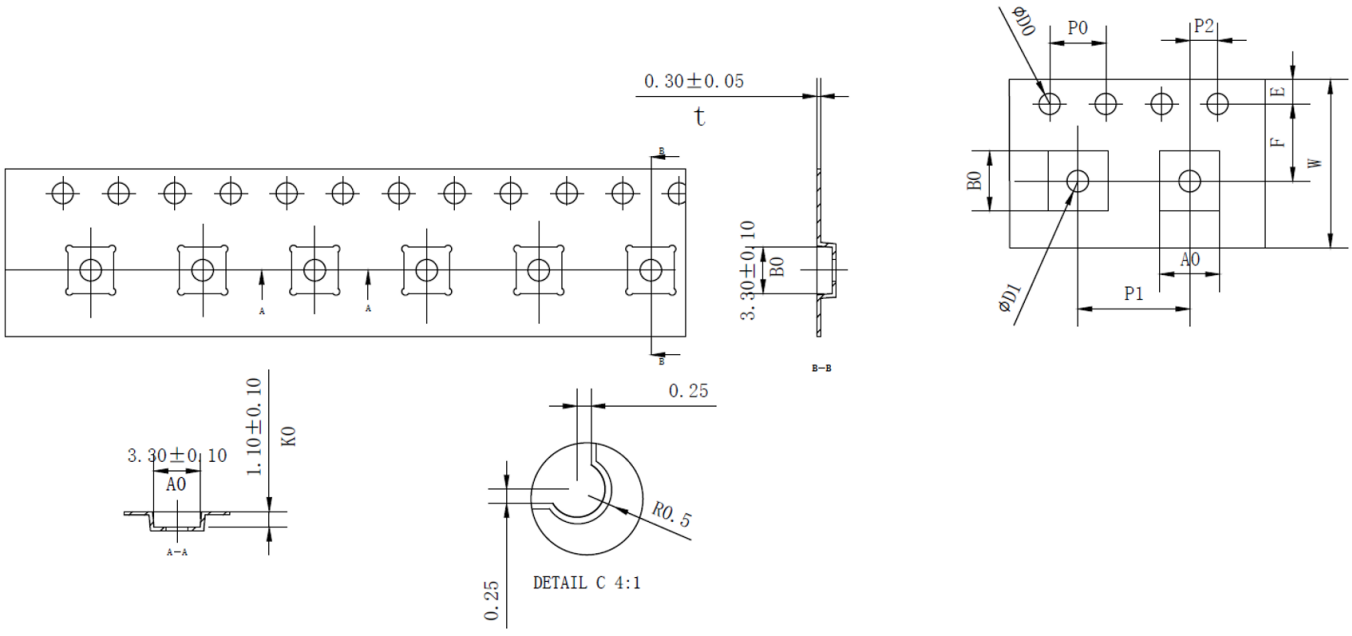

W	E	F	D0	D1	P0	P2	10P0	P1	A0	A1	B0	B1	K0	K1	t
12.00 ±0.10	1.75 ±0.10	5.50 ±0.10	1.55 ±0.05	1.55 ±0.05	4.00 ±0.10	2.00 ±0.10	40.00 ±0.20	8.00 ±0.10	3.30 ±0.10		3.30 ±0.10		1.10 ±0.10		0.30 ±0.05


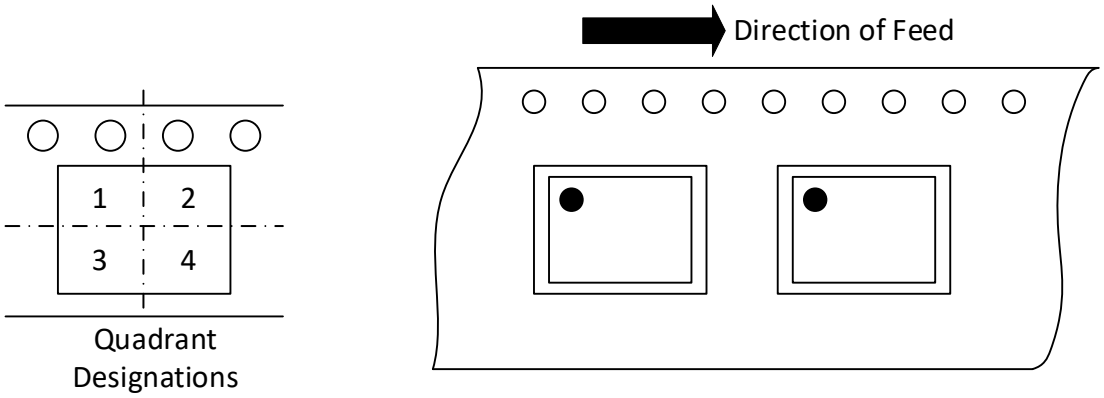


Figure 12-2 Tape Information of DFN8

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

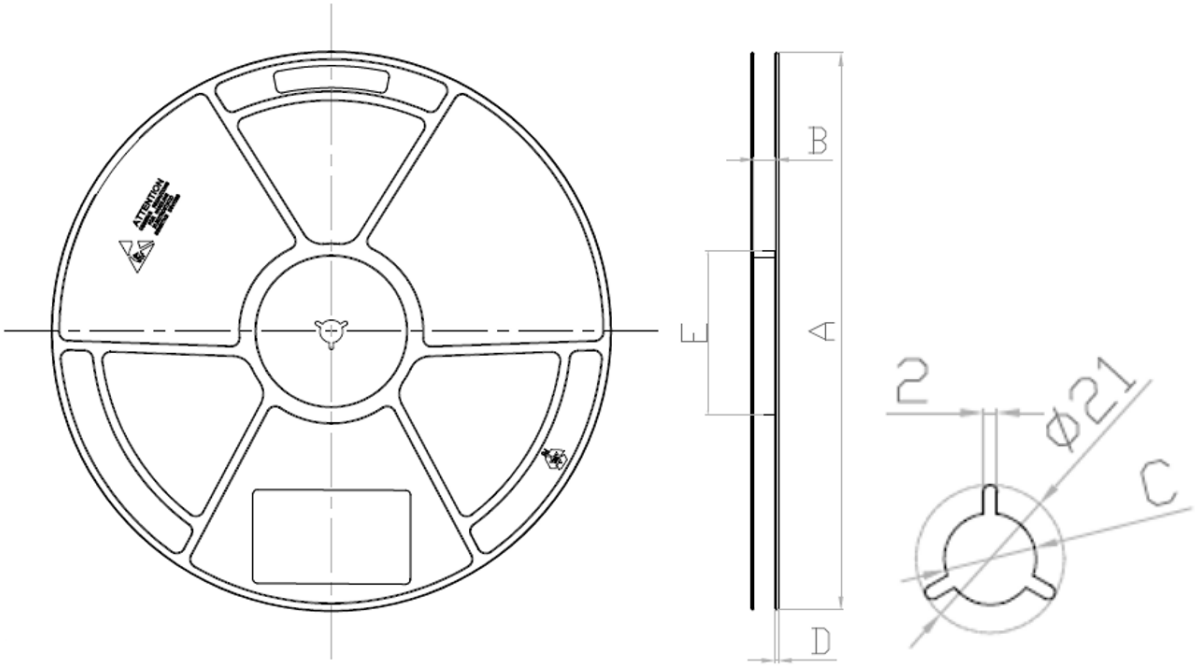

规格	A	B	C	D	E
12W	330±2.0	12.5±1.00	13.5±1.00	1.9±1.00	100±1.00
16W	330±2.0	16.5±1.00	13.5±1.00	1.9±1.00	100±1.00
24W	330±2.0	24.5±1.00	13.5±1.00	1.9±1.00	100±1.00
32W	330±2.0	32.5±1.00	13.5±1.00	1.9±1.00	100±1.00
44W	330±2.0	44.5±1.00	13.5±1.00	1.9±1.00	100±1.00

Figure 12-3 Reel Information of SOP8 and DFN8

13. Revision History

Revision	Description	Date
1.0	Initial Version.	2024/9/30
1.1	Add the parameter-$t_{startup(RXD)}$ and the description of short circuit protection, Add system-level ESD parameters and modified SOP8 carrier information	2024/12/24
1.2	Correct common mode voltage information error on page 1； Increase the dv/dt parameter, added Ⅱcould pass VeLIO test part number	2025/8/28

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
Downloaded From Oneyac.com

IMPORTANT NOTICE

The information given in this document (the “Document”) shall in no event be regarded as any warranty or authorization of, express or implied, including but not limited to accuracy, completeness, merchantability, fitness for a particular purpose or infringement of any third party’s intellectual property rights.

Users of this Document shall be solely responsible for the use of NOVOSENSE’s products and applications, and for the safety thereof. Users shall comply with all laws, regulations and requirements related to NOVOSENSE’s products and applications, although information or support related to any application may still be provided by NOVOSENSE.

This Document is provided on an “AS IS” basis and is intended only for skilled developers designing with NOVOSENSE’ products. NOVOSENSE reserves the rights to make corrections, modifications, enhancements, improvements or other changes to the products and services provided without notice. NOVOSENSE authorizes users to use this Document exclusively for the development of relevant applications or systems designed to integrate NOVOSENSE’s products. No license to any intellectual property rights of NOVOSENSE is granted by implication or otherwise. Using this Document for any other purpose, or any unauthorized reproduction or display of this Document is strictly prohibited. In no event shall NOVOSENSE be liable for any claims, damages, costs, losses or liabilities arising out of or in connection with this Document or the use of this Document.

For further information on applications, products and technologies, please contact NOVOSENSE (www.novosns.com).

Suzhou NOVOSENSE Microelectronics Co., Ltd

Copyright © 2025, NOVOSENSE

深圳市满度科技有限公司
Web:www.manduic.com
Downloaded From Oneyac.com
Tel:150-1290-5940
Email:sales@manduic.com

单击下面可查看定价，库存，交付和生命周期等信息

>>Novosense(纳芯微)

Downloaded From Oneyac.com