GigaDevice Semiconductor Inc.

GD32F130xx
Arm® Cortex®-M3 32-bit MCU

Datasheet

Revision 4.2

(Aug. 2025)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
微信扫码咨询客服

Table of Contents

Table of Contents 1
List of Figures 4
List of Tables 5
1. General description 7
2. Device overview 8
2.1. Device information 8
2.2. Block diagram 9
2.3. Pinouts and pin assignment 10
2.4. Memory map 13
2.5. Clock tree 15
2.6. Pin definitions 16
2.6.1. GD32F130R8 LQFP64 pin definitions 16
2.6.2. GD32F130Cx LQFP48 pin definitions 20
2.6.3. GD32F130Kx LQFP32 pin definitions 23
2.6.4. GD32F130Kx QFN32 pin definitions 25
2.6.5. GD32F130Gx QFN28 pin definitions 28
2.6.6. GD32F130Fx TSSOP20 pin definitions 30
2.6.7. GD32F130xx pin alternate functions 32
3. Functional description 36
3.1. Arm® Cortex®-M3 core 36
3.2. On-chip memory 36
3.3. Clock, reset and supply management 37
3.4. Boot modes 37
3.5. Power saving modes 38
3.6. Analog to digital converter (ADC) 38
3.7. DMA 39
3.8. General-purpose inputs/outputs (GPIOs) 39
3.9. Timers and PWM generation 39
3.10. Real time clock (RTC) 40
3.11. Inter-integrated circuit (I2C) 41
3.12. Serial peripheral interface (SPI) 41
3.13. Universal synchronous asynchronous receiver transmitter (USART) 41

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3.14. Debug mode 42
3.15. Package and operation temperature 42
4. Electrical characteristics 43
4.1. Absolute maximum ratings 43
4.2. Operating conditions characteristics 43
4.3. Power consumption 45
4.4. EMC characteristics 48
4.5. Power supply supervisor characteristics 50
4.6. Electrical sensitivity 51
4.7. External clock characteristics 51
4.8. Internal clock characteristics 53
4.9. PLL characteristics 54
4.10. Memory characteristics 55
4.11. NRST pin characteristics 55
4.12. GPIO characteristics 56
4.13. ADC characteristics 58
4.14. Temperature sensor characteristics 58
4.15. I2C characteristics 59
4.16. USART characteristics 60
4.17. TIMER characteristics 60
4.18. WDGT characteristics 60
4.19. Parameter conditions 61
5. Package information 62
5.1. LQFP64 package outline dimensions 62
5.2. LQFP48 package outline dimensions 64
5.3. LQFP32 package outline dimensions 66
5.4. QFN32 package outline dimensions 68
5.5. QFN28 package outline dimensions 70
5.6. TSSOP20 package outline dimensions 72
5.7. Thermal characteristics 74
6. Ordering information 76
7. Revision history 77

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

List of Figures

Figure 2-1. GD32F130xx block diagram 9
Figure 2-2. GD32F130Rx LQFP64 pinouts 10
Figure 2-3. GD32F130Cx LQFP48 pinouts 10
Figure 2-4. GD32F130Kx LQFP32 pinouts 11
Figure 2-5. GD32F130Kx QFN32 pinouts 11
Figure 2-6. GD32F130Gx QFN28 pinouts 12
Figure 2-7. GD32F130Fx TSSOP20 pinouts 12
Figure 2-8. GD32F130xx clock tree 15
Figure 4-1. Recommended power supply decoupling capacitors(1) 44
Figure 4-2. Typical supply current consumption in Run mode 48
Figure 4-3. Typical supply current consumption in Sleep mode 48
Figure 4-4. Recommended external NRST pin circuit(1) 56
Figure 4-5. I2C bus timing diagram 59
Figure 5-1. LQFP64 package outline 62
Figure 5-2. LQFP64 recommended footprint 63
Figure 5-3. LQFP48 package outline 64
Figure 5-4. LQFP48 recommended footprint 65
Figure 5-5. LQFP32 package outline 66
Figure 5-6. LQFP32 recommended footprint 67
Figure 5-7. QFN32 package outline 68
Figure 5-8. QFN32 recommended footprint 69
Figure 5-9. QFN28 package outline 70
Figure 5-10. QFN28 recommended footprint 71
Figure 5-11. TSSOP20 package outline 72
Figure 5-12. TSSOP20 recommended footprint 73

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

List of Tables

Table 2-1. GD32F130xx devices features and peripheral list 8
Table 2-2. GD32F130xx memory map 13
Table 2-3. GD32F130R8 LQFP64 pin definitions 16
Table 2-4. GD32F130Cx LQFP48 pin definitions 20
Table 2-5. GD32F130Kx LQFP32 pin definitions 23
Table 2-6. GD32F130Kx QFN32 pin definitions 25
Table 2-7. GD32F130Gx QFN28 pin definitions 28
Table 2-8. GD32F130Fx TSSOP20 pin definitions 30
Table 2-9. Port A alternate functions summary 32
Table 2-10. Port B alternate functions summary 33
Table 2-11. Port C & D & F alternate functions summary 35
Table 4-1. Absolute maximum ratings(1)(4) 43
Table 4-2. DC operating conditions 43
Table 4-3. Clock frequency(1) 44
Table 4-4. Operating conditions at Power up/ Power down(1) 44
Table 4-5. Start-up timings of Operating conditions(1)(2)(3) 44
Table 4-6. Power saving mode wakeup timings characteristics(1)(2) 44
Table 4-7.Power consumption characteristics(2)(3)(3)(4)(5) 45
Table 4-8. EMS characteristics(1) 49
Table 4-9. EMI characteristics(1) 49
Table 4-10. Power supply supervisor characteristics 50
Table 4-11. ESD characteristics 51
Table 4-12. Static latch-up characteristics 51
Table 4-13. High speed crystal oscillator (HXTAL) generated from a crystal/ceramic characteristics 51
Table 4-14. High speed external clock characteristics (HXTAL in bypass mode) 51
Table 4-15. Low speed external clock (LXTAL) generated from a crystal/ceramic characteristics 52
Table 4-16. Low speed external user clock characteristics (LXTAL in bypass mode) 53
Table 4-17. Internal 8 MHz RC oscillator (IRC8M) characteristics 53
Table 4-18. Internal 40KHz RC oscillator (IRC40K) characteristics 53
Table 4-19. High speed internal clock (IRC14M) characteristics 54
Table 4-20. PLL characteristics 54
Table 4-21. Flash memory characteristics 55
Table 4-22. NRST pin characteristics 55
Table 4-23. I/O port DC characteristics(1)(3) 56
Table 4-24. I/O port AC characteristics(1)(2)(4 57
Table 4-25. ADC characteristics 58
Table 4-26. ADC $R_{AIN\ max}$ for f_{ADC} =14 MHz 58
Table 4-27. Temperature sensor characteristics(1) 58
Table 4-28. I2C characteristics (1) (2) (3) 59
Table 4-29. USART characteristics (1) 60

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 4-30. TIMER characteristics (1) 60
Table 4-31. FWDGT min/max timeout period at 40 kHz (IRC40K) (1) 60
Table 4-32. WWDGT min-max timeout value at 48 MHz (f_{PCLK1}) (1) 61
Table 5-1. LQFP64 package dimensions 62
Table 5-2. LQFP48 package dimensions 64
Table 5-3. LQFP32 package dimensions 66
Table 5-4. QFN32 package dimensions 68
Table 5-5. QFN28 package dimensions 70
Table 5-6. TSSOP20 package dimensions 72
Table 5-7. Package thermal characteristics(1) 74
Table 6-1. Part ordering code for GD32F130xx devices 76
Table 7-1. Revision history 77

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

1. General description

The GD32F130xx device belongs to the value line of GD32 MCU family. It is a 32-bit general-purpose microcontroller based on the high performance Arm® Cortex®-M3 RISC core with best ratio in terms of processing power, reduced power consumption and peripheral set. The Cortex®-M3 is a next generation processor core which is tightly coupled with a Nested Vectored Interrupt Controller (NVIC), SysTick timer and advanced debug support.

The GD32F130xx device incorporates the Arm® Cortex®-M3 32-bit processor core operating at 48 MHz frequency with Flash accesses zero wait states to obtain maximum efficiency. It provides up to 64 KB on-chip Flash memory and up to 8 KB SRAM memory. An extensive range of enhanced I/Os and peripherals connected to two APB buses. The devices offer one 12-bit ADC, up to five general 16-bit timers, a general 32-bit timer, a PWM advanced timer, as well as standard and advanced communication interfaces: up to two SPIs, two I2Cs and two USARTs.

The device operates from a 2.6 to 3.6 V power supply and available in –40 to +85 °C temperature range. Several power saving modes provide the flexibility for maximum optimization between wakeup latency and power consumption, an especially important consideration in low power applications.

The above features make the GD32F130xx devices suitable for a wide range of applications, especially in areas such as industrial control, motor drives, user interface, power monitor and alarm systems, consumer and handheld equipment, gaming and GPS, E-bike and so on.



深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2. Device overview

2.1. Device information


Table 2-1. GD32F130xx devices features and peripheral list

Part Number		GD32F130xx															
		F4	F6	F8	G4	G6	G8	K4	K6	K8	K4	K6	K8	C4	C6	C8	R8
Flash	Code area (KB)	16	32	32	16	32	32	16	32	32	16	32	32	16	32	32	32
	Data area (KB)	0	0	32	0	0	32	0	0	32	0	0	32	0	0	32	32
	Total (KB)	16	32	64	16	32	64	16	32	64	16	32	64	16	32	64	64
SRAM (KB)		4	4	8	4	4	8	4	4	8	4	4	8	4	4	8	8
Timers	General timer(32-bit)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)
	General timer(16-bit)	4 (2,13,15-16)	4 (2,13,15-16)	4 (2,13,15-16)	4 (2,13,15-16)	4 (2,13,15-16)	5 (2,13-16)	4 (2,13,15-16)	4 (2,13,15-16)	4 (2,13,15-16)	4 (2,13,15-16)	5 (2,13-16)	5 (2,13-16)	4 (2,13,15-16)	4 (2,13,15-16)	5 (2,13-16)	5 (2,13-16)
	Advanced timer(16-bit)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)	1 (0)
	SysTick	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Watchdog	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	RTC	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Connectivity	USART	1 (0)	2 (0-1)	2 (0-1)	1 (0)	2 (0-1)	2 (0-1)	1 (0)	2 (0-1)	2 (0-1)	1 (0)	2 (0-1)	2 (0-1)	1 (0)	2 (0-1)	2 (0-1)	2 (0-1)
	I2C	1 (0)	1 (0)	2 (0-1)	1 (0)	1 (0)	2 (0-1)	1 (0)	1 (0)	1 (0)	1 (0)	2 (0-1)	2 (0-1)	1 (0)	1 (0)	2 (0-1)	2 (0-1)
	SPI	1 (0)	1 (0)	2 (0-1)	1 (0)	1 (0)	2 (0-1)	1 (0)	1 (0)	1 (0)	1 (0)	2 (0-1)	2 (0-1)	1 (0)	1 (0)	2 (0-1)	2 (0-1)
GPIO		15	15	15	23	23	23	27	27	27	25	25	25	39	39	39	55
EXTI		16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
ADC	Units	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Channels (External)	9	9	9	10	10	10	10	10	10	10	10	10	10	10	10	16
	Channels (Internal)	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Package		TSSOP20			QFN28			QFN32			LQFP32			LQFP48			LQFP64

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.2. Block diagram

Figure 2-1. GD32F130xx block diagram

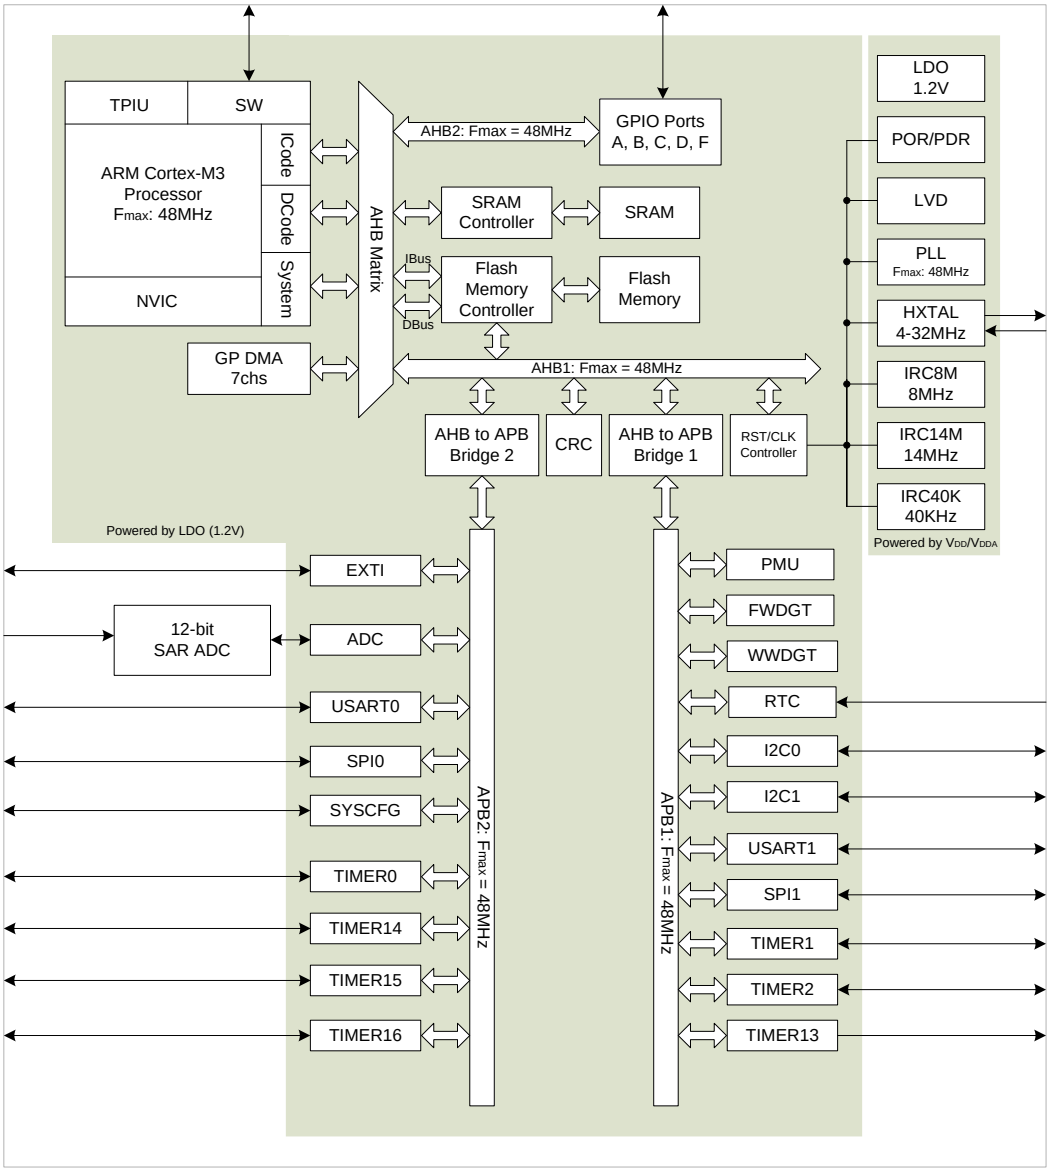

2.3. Pinouts and pin assignment

Figure 2-2. GD32F130Rx LQFP64 pinouts


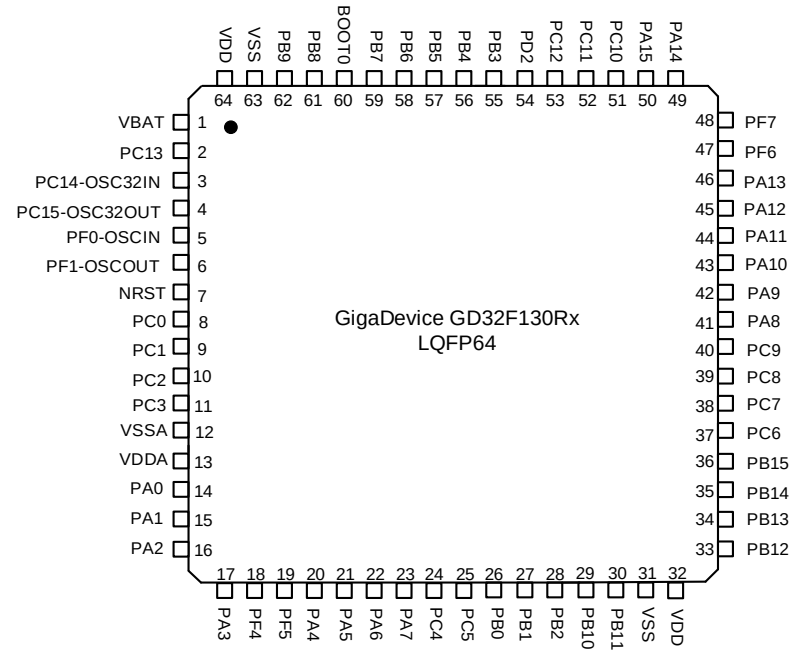


Figure 2-3. GD32F130Cx LQFP48 pinouts

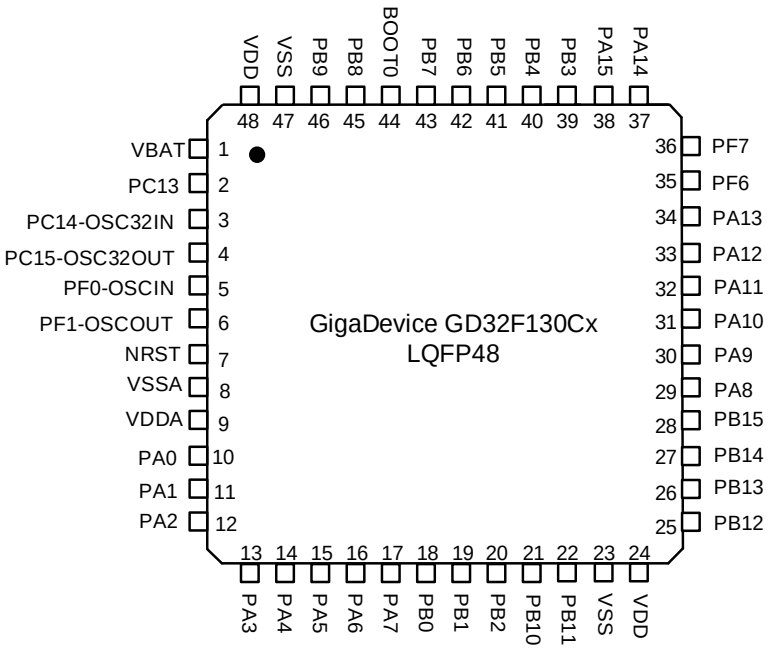

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 2-4. GD32F130Kx LQFP32 pinouts


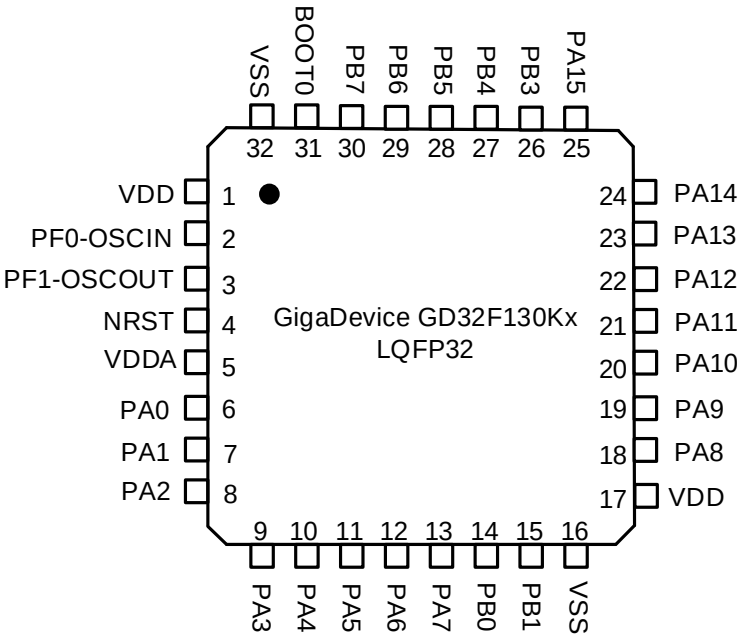


Figure 2-5. GD32F130Kx QFN32 pinouts

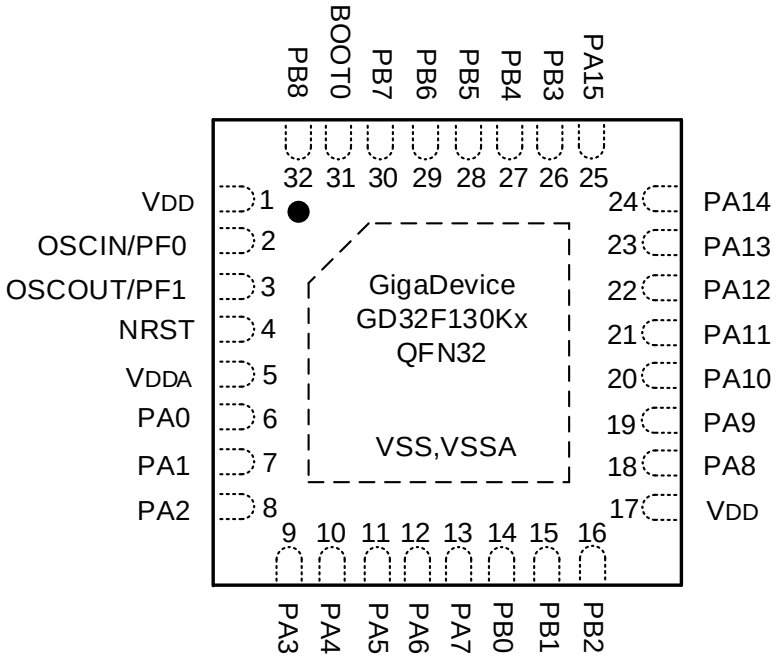

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 2-6. GD32F130Gx QFN28 pinouts


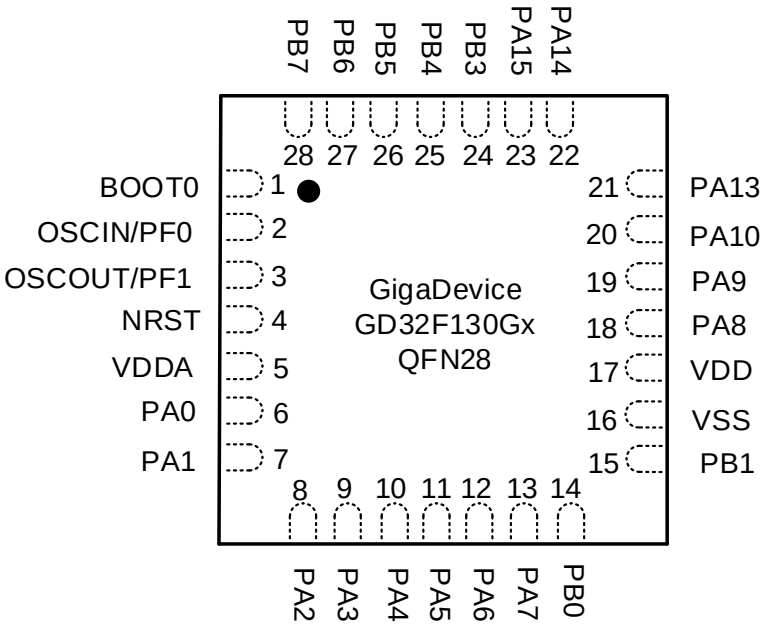


Figure 2-7. GD32F130Fx TSSOP20 pinouts

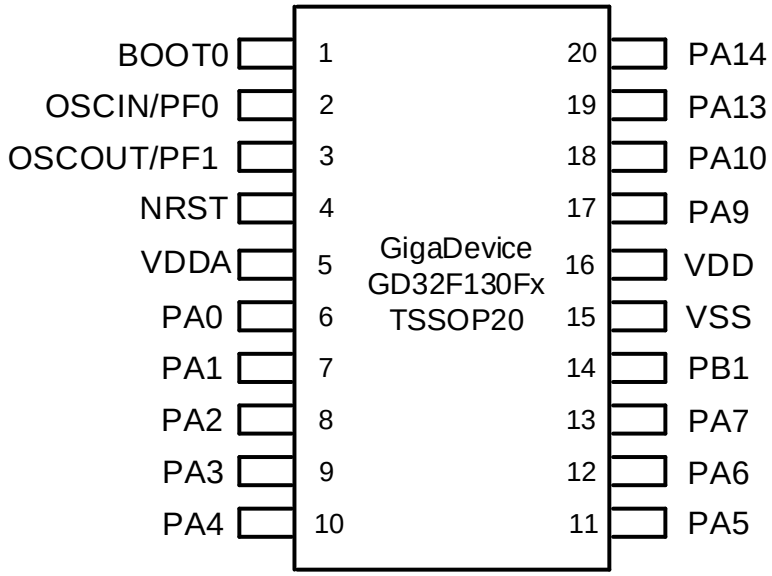

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.4. Memory map

Table 2-2. GD32F130xx memory map

Pre-defined Regions	Bus	Address	Peripherals
		0xE000 0000 - 0xE00F FFFF	Cortex-M3 internal peripherals
External Device		0xA000 0000 - 0xDFFF FFFF	Reserved
External RAM		0x6000 0000 - 0x9FFF FFFF	Reserved
Peripherals	AHB1	0x5000 0000 - 0x5FFF FFFF	Reserved
	AHB2	0x4800 1800 - 0x4FFF FFFF	Reserved
		0x4800 1400 - 0x4800 17FF	GPIOF
		0x4800 1000 - 0x4800 13FF	Reserved
		0x4800 0C00 - 0x4800 0FFF	GPIOD
		0x4800 0800 - 0x4800 0BFF	GPIOC
		0x4800 0400 - 0x4800 07FF	GPIOB
		0x4800 0000 - 0x4800 03FF	GPIOA
	AHB1	0x4002 4400 - 0x47FF FFFF	Reserved
		0x4002 4000 - 0x4002 43FF	Reserved
		0x4002 3400 - 0x4002 3FFF	Reserved
		0x4002 3000 - 0x4002 33FF	CRC
		0x4002 2400 - 0x4002 2FFF	Reserved
		0x4002 2000 - 0x4002 23FF	FMC
		0x4002 1400 - 0x4002 1FFF	Reserved
		0x4002 1000 - 0x4002 13FF	RCU
		0x4002 0400 - 0x4002 0FFF	Reserved
		0x4002 0000 - 0x4002 03FF	DMA
	APB2	0x4001 4C00 - 0x4001 FFFF	Reserved
		0x4001 4800 - 0x4001 4BFF	TIMER16
		0x4001 4400 - 0x4001 47FF	TIMER15
		0x4001 4000 - 0x4001 43FF	TIMER14
		0x4001 3C00 - 0x4001 3FFF	Reserved
		0x4001 3800 - 0x4001 3BFF	USART0
		0x4001 3400 - 0x4001 37FF	Reserved
		0x4001 3000 - 0x4001 33FF	SPI0
		0x4001 2C00 - 0x4001 2FFF	TIMER0
		0x4001 2800 - 0x4001 2BFF	Reserved
		0x4001 2400 - 0x4001 27FF	ADC
		0x4001 0800 - 0x4001 23FF	Reserved
		0x4001 0400 - 0x4001 07FF	EXTI
		0x4001 0000 - 0x4001 03FF	SYSCFG
	APB1	0x4000 C400 - 0x4000 FFFF	Reserved
		0x4000 C000 - 0x4000 C3FF	Reserved


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Pre-defined Regions	Bus	Address	Peripherals
		0x4000 7C00 - 0x4000 BFFF	Reserved
		0x4000 7800 - 0x4000 7BFF	Reserved
		0x4000 7400 - 0x4000 77FF	Reserved
		0x4000 7000 - 0x4000 73FF	PMU
		0x4000 6400 - 0x4000 6FFF	Reserved
		0x4000 6000 - 0x4000 63FF	Reserved
		0x4000 5C00 - 0x4000 5FFF	Reserved
		0x4000 5800 - 0x4000 5BFF	I2C1
		0x4000 5400 - 0x4000 57FF	I2C0
		0x4000 4800 - 0x4000 53FF	Reserved
		0x4000 4400 - 0x4000 47FF	USART1
		0x4000 4000 - 0x4000 43FF	Reserved
		0x4000 3C00 - 0x4000 3FFF	Reserved
		0x4000 3800 - 0x4000 3BFF	SPI1
		0x4000 3400 - 0x4000 37FF	Reserved
		0x4000 3000 - 0x4000 33FF	FWDGT
		0x4000 2C00 - 0x4000 2FFF	WWDGT
		0x4000 2800 - 0x4000 2BFF	RTC
		0x4000 2400 - 0x4000 27FF	Reserved
		0x4000 2000 - 0x4000 23FF	TIMER13
		0x4000 1400 - 0x4000 1FFF	Reserved
		0x4000 1000 - 0x4000 13FF	Reserved
		0x4000 0800 - 0x4000 0FFF	Reserved
		0x4000 0400 - 0x4000 07FF	TIMER2
		0x4000 0000 - 0x4000 03FF	TIMER1
SRAM		0x2000 2000 - 0x3FFF FFFF	Reserved
		0x2000 0000 - 0x2000 1FFF	SRAM
Code		0x1FFF F810 - 0x1FFF FFFF	Reserved
		0x1FFF F800 - 0x1FFF F80F	Option bytes
		0x1FFF EC00 - 0x1FFF F7FF	System memory
		0x0801 0000 - 0x1FFF EBFF	Reserved
		0x0800 0000 - 0x0800 FFFF	Main Flash memory
		0x0000 0000 - 0x07FF FFFF	Aliased to Flash or system memory

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.5. Clock tree

Figure 2-8. GD32F130xx clock tree

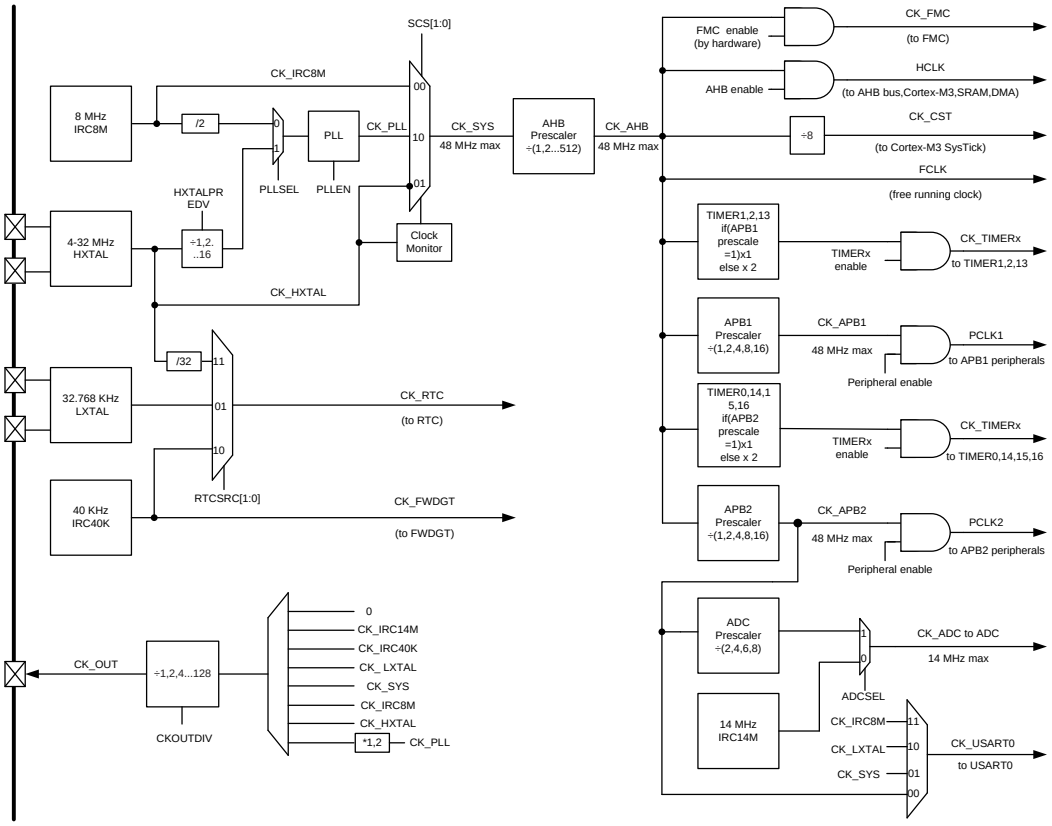

Note:

If the APB prescaler is 1, the timer clock frequencies are set to AHB frequency divide by 1. Otherwise, they are set to the AHB frequency divide by half of APB prescaler.

Legend:

HXTAL: High speed crystal oscillator

LXTAL: Low speed crystal oscillator

IRC8M: Internal 8M RC oscillators

IRC40K: Internal 40K RC oscillator

IRC14M: Internal 14M RC oscillators

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.6. Pin definitions

2.6.1. GD32F130R8 LQFP64 pin definitions

Table 2-3. GD32F130R8 LQFP64 pin definitions

GD32F130R8 LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
VBAT	1	P		Default: VBAT
PC13-TAMPER-RTC	2	I/O		Default: PC13 Additional: RTC_TAMP0, RTC_TS, RTC_OUT, WKUP1
PC14-OSC32IN	3	I/O		Default: PC14 Additional: OSC32IN
PC15-OSC32OUT	4	I/O		Default: PC15 Additional: OSC32OUT
PF0-OSCIN	5	I/O	5VT	Default: PF0 Additional: OSCIN
PF1-OSCOUT	6	I/O	5VT	Default: PF1 Additional: OSCOUT
NRST	7	I/O		Default: NRST
PC0	8	I/O		Default: PC0 Alternate: EVENTOUT Additional: ADC_IN10
PC1	9	I/O		Default: PC1 Alternate: EVENTOUT Additional: ADC_IN11
PC2	10	I/O		Default: PC2 Alternate: EVENTOUT Additional: ADC_IN12
PC3	11	I/O		Default: PC3 Alternate: EVENTOUT Additional: ADC_IN13
VSSA	12	P		Default: VSSA
VDDA	13	P		Default: VDDA
PA0-WKUP	14	I/O		Default: PA0 Alternate: USART1_CTS, TIMER1_CH0, TIMER1_ETI, I2C1_SCL Additional: ADC_IN0, RTC_TAMP1, WKUP0
PA1	15	I/O		Default: PA1 Alternate: USART1_RTS/USART1_DE, TIMER1_CH1,

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130R8 LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				I2C1_SDA, EVENTOUT Additional: ADC_IN1
PA2	16	I/O		Default: PA2 Alternate: USART1_TX, TIMER1_CH2, TIMER14_CH0 , Additional: ADC_IN2
PA3	17	I/O		Default: PA3 Alternate: USART1_RX, TIMER1_CH3, TIMER14_CH1 Additional: ADC_IN3
PF4	18	I/O	5VT	Default: PF4 Alternate: SPI1_NSS, EVENTOUT
PF5	19	I/O	5VT	Default: PF5 Alternate: EVENTOUT
PA4	20	I/O		Default: PA4 Alternate: SPI0_NSS, USART1_CK, TIMER13_CH0, SPI1_NSS Additional: ADC_IN4
PA5	21	I/O		Default: PA5 Alternate: SPI0_SCK, TIMER1_CH0, TIMER1_ETI Additional: ADC_IN5
PA6	22	I/O		Default: PA6 Alternate: SPI0_MISO, TIMER2_CH0, TIMER0_BRKIN, TIMER15_CH0, EVENTOUT Additional: ADC_IN6
PA7	23	I/O		Default: PA7 Alternate: SPI0_MOSI, TIMER2_CH1, TIMER13_CH0, TIMER0_CH0_ON, TIMER16_CH0, EVENTOUT Additional: ADC_IN7
PC4	24	I/O		Default: PC4 Alternate: EVENTOUT Additional: ADC_IN14
PC5	25	I/O		Default: PC5 Additional: ADC_IN15
PB0	26	I/O		Default: PB0 Alternate: TIMER2_CH2, TIMER0_CH1_ON, USART1_RX, EVENTOUT Additional: ADC_IN8
PB1	27	I/O		Default: PB1 Alternate: TIMER2_CH3, TIMER13_CH0, TIMER0_CH2_ON, SPI1_SCK Additional: ADC_IN9
PB2	28	I/O	5VT	Default: PB2
PB10	29	I/O	5VT	Default: PB10

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130R8 LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Alternate: I2C1_SCL, TIMER1_CH2
PB11	30	I/O	5VT	Default: PB11 Alternate: I2C1_SDA, TIMER1_CH3, EVENTOUT
VSS	31	P		Default: VSS
VDD	32	P		Default: VDD
PB12	33	I/O	5VT	Default: PB12 Alternate: SPI1_NSS, TIMER0_BRKIN, I2C1_SMBA, EVENTOUT
PB13	34	I/O	5VT	Default: PB13 Alternate: SPI1_SCK, TIMER0_CH0_ON
PB14	35	I/O	5VT	Default: PB14 Alternate: SPI1_MISO, TIMER0_CH1_ON, TIMER14_CH0
PB15	36	I/O	5VT	Default: PB15 Alternate: SPI1_MOSI, TIMER0_CH2_ON, TIMER14_CH0_ON, TIMER14_CH1 Additional: RTC_REFIN
PC6	37	I/O	5VT	Default: PC6 Alternate: TIMER2_CH0
PC7	38	I/O	5VT	Default: PC7 Alternate: TIMER2_CH1
PC8	39	I/O	5VT	Default: PC8 Alternate: TIMER2_CH2
PC9	40	I/O	5VT	Default: PC9 Alternate: TIMER2_CH3
PA8	41	I/O	5VT	Default: PA8 Alternate: USART0_CK, TIMER0_CH0, CK_OUT, USART1_TX, EVENTOUT
PA9	42	I/O	5VT	Default: PA9 Alternate: USART0_TX, TIMER0_CH1, TIMER14_BRKIN, I2C0_SCL
PA10	43	I/O	5VT	Default: PA10 Alternate: USART0_RX, TIMER0_CH2, TIMER16_BRKIN, I2C0_SDA
PA11	44	I/O	5VT	Default: PA11 Alternate: USART0_CTS, TIMER0_CH3, EVENTOUT
PA12	45	I/O	5VT	Default: PA12 Alternate: USART0_RTS/USART0_DE, TIMER0_ETI, EVENTOUT
PA13	46	I/O	5VT	Default: PA13 Alternate: IFRP_OUT, SWDIO, SPI1_MISO
PF6	47	I/O	5VT	Default: PF6

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130R8 LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Alternate: I2C1_SCL
PF7	48	I/O	5VT	Default: PF7 Alternate: I2C1_SDA
PA14	49	I/O	5VT	Default: PA14 Alternate: USART1_TX, SWCLK, SPI1_MOSI
PA15	50	I/O	5VT	Default: PA15 Alternate: SPI0_NSS, USART1_RX, TIMER1_CH0, TIMER1_ETI, SPI1_NSS, EVENTOUT
PC10	51	I/O	5VT	Default: PC10
PC11	52	I/O	5VT	Default: PC11
PC12	53	I/O	5VT	Default: PC12
PD2	54	I/O	5VT	Default: PD2 Alternate: TIMER2_ETI
PB3	55	I/O	5VT	Default: PB3 Alternate: SPI0_SCK, TIMER1_CH1, EVENTOUT
PB4	56	I/O	5VT	Default: PB4 Alternate: SPI0_MISO, TIMER2_CH0, EVENTOUT
PB5	57	I/O	5VT	Default: PB5 Alternate: SPI0_MOSI, I2C0_SMBA, TIMER15_BRKIN, TIMER2_CH1
PB6	58	I/O	5VT	Default: PB6 Alternate: I2C0_SCL, USART0_TX, TIMER15_CH0_ON
PB7	59	I/O	5VT	Default: PB7 Alternate: I2C0_SDA, USART0_RX, TIMER16_CH0_ON
BOOT0	60	I		Default: BOOT0
PB8	61	I/O	5VT	Default: PB8 Alternate: I2C0_SCL, TIMER15_CH0
PB9	62	I/O	5VT	Default: PB9 Alternate: I2C0_SDA, IFRP_OUT, TIMER16_CH0, EVENTOUT
VSS	63	P		Default: VSS
VDD	64	P		Default: VDD

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.6.2. GD32F130Cx LQFP48 pin definitions

Table 2-4. GD32F130Cx LQFP48 pin definitions

GD32F130Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
VBAT	1	P		Default: VBAT
PC13-TAMPER-RTC	2	I/O		Default: PC13 Additional: RTC_TAMP0, RTC_TS, RTC_OUT, WKUP1
PC14-OSC32IN	3	I/O		Default: PC14 Additional: OSC32IN
PC15-OSC32OUT	4	I/O		Default: PC15 Additional: OSC32OUT
PF0-OSCIN	5	I/O	5VT	Default: PF0 Additional: OSCIN
PF1-OSCOUT	6	I/O	5VT	Default: PF1 Additional: OSCOUT
NRST	7	I/O		Default: NRST
VSSA	8	P		Default: VSSA
VDDA	9	P		Default: VDDA
PA0-WKUP	10	I/O		Default: PA0 Alternate: USART0_CTS(3), USART1_CTS(4), TIMER1_CH0, TIMER1_ETI, I2C1_SCL(5) Additional: ADC_IN0, RTC_TAMP1, WKUP0
PA1	11	I/O		Default: PA1 Alternate: USART0_RTS(3)/USART0_DE(3), USART1_RTS(4)/USART1_DE(4), TIMER1_CH1, I2C1_SDA(5), EVENTOUT Additional: ADC_IN1
PA2	12	I/O		Default: PA2 Alternate: USART0_TX(3), USART1_TX(4), TIMER1_CH2, TIMER14_CH0 Additional: ADC_IN2
PA3	13	I/O		Default: PA3 Alternate: USART0_RX(3), USART1_RX(4), TIMER1_CH3, TIMER14_CH1 Additional: ADC_IN3
PA4	14	I/O		Default: PA4 Alternate: SPI0_NSS, USART0_CK(3), USART1_CK(4), TIMER13_CH0, SPI1_NSS(5) Additional: ADC_IN4
PA5	15	I/O		Default: PA5

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Alternate: SPI0_SCK, TIMER1_CH0, TIMER1_ETI Additional: ADC_IN5
PA6	16	I/O		Default: PA6 Alternate: SPI0_MISO, TIMER2_CH0, TIMER0_BRKIN, TIMER15_CH0, EVENTOUT Additional: ADC_IN6
PA7	17	I/O		Default: PA7 Alternate: SPI0_MOSI, TIMER2_CH1, TIMER13_CH0, TIMER0_CH0_ON, TIMER16_CH0, EVENTOUT Additional: ADC_IN7
PB0	18	I/O		Default: PB0 Alternate: TIMER2_CH2, TIMER0_CH1_ON, USART1_RX(4), EVENTOUT Additional: ADC_IN8
PB1	19	I/O		Default: PB1 Alternate: TIMER2_CH3, TIMER13_CH0, TIMER0_CH2_ON, SPI1_SCK(5) Additional: ADC_IN9
PB2	20	I/O	5VT	Default: PB2
PB10	21	I/O	5VT	Default: PB10 Alternate: I2C1_SCL(5), TIMER1_CH2
PB11	22	I/O	5VT	Default: PB11 Alternate: I2C1_SDA(5), TIMER1_CH3, EVENTOUT
VSS	23	P		Default: VSS
VDD	24	P		Default: VDD
PB12	25	I/O	5VT	Default: PB12 Alternate: SPI0_NSS(3), SPI1_NSS(5), TIMER0_BRKIN, I2C1_SMBA(5), EVENTOUT
PB13	26	I/O	5VT	Default: PB13 Alternate: SPI0_SCK(3), SPI1_SCK(5), TIMER0_CH0_ON
PB14	27	I/O	5VT	Default: PB14 Alternate: SPI0_MISO(3), SPI1_MISO(5), TIMER0_CH1_ON, TIMER14_CH0
PB15	28	I/O	5VT	Default: PB15 Alternate: SPI0_MOSI(3), SPI1_MOSI(5), TIMER0_CH2_ON, TIMER14_CH0_ON, TIMER14_CH1 Additional: RTC_REFIN
PA8	29	I/O	5VT	Default: PA8 Alternate: USART0_CK, TIMER0_CH0, CK_OUT, USART1_TX(4), EVENTOUT
PA9	30	I/O	5VT	Default: PA9

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Alternate: USART0_TX, TIMER0_CH1, TIMER14_BRKIN, I2C0_SCL
PA10	31	I/O	5VT	Default: PA10 Alternate: USART0_RX, TIMER0_CH2, TIMER16_BRKIN, I2C0_SDA
PA11	32	I/O	5VT	Default: PA11 Alternate: USART0_CTS, TIMER0_CH3, EVENTOUT
PA12	33	I/O	5VT	Default: PA12 Alternate: USART0_RTS/USART0_DE, TIMER0_ETI, EVENTOUT
PA13	34	I/O	5VT	Default: PA13 Alternate: IFRP_OUT, SWDIO, SPI1_MISO(5)
PF6	35	I/O	5VT	Default: PF6 Alternate: I2C1_SCL(5), I2C0_SCL(6)
PF7	36	I/O	5VT	Default: PF7 Alternate: I2C1_SDA(5), I2C0_SCL(6)
PA14	37	I/O	5VT	Default: PA14 Alternate: USART0_TX(3), USART1_TX(4), SWCLK, SPI1_MOSI(5)
PA15	38	I/O	5VT	Default: PA15 Alternate: SPI0_NSS, USART0_RX(3), USART1_RX(4), TIMER1_CH0, TIMER1_ETI, SPI1_NSS(5), EVENTOUT
PB3	39	I/O	5VT	Default: PB3 Alternate: SPI0_SCK, TIMER1_CH1, EVENTOUT
PB4	40	I/O	5VT	Default: PB4 Alternate: SPI0_MISO, TIMER2_CH0, EVENTOUT
PB5	41	I/O	5VT	Default: PB5 Alternate: SPI0_MOSI, I2C0_SMBA, TIMER15_BRKIN, TIMER2_CH1
PB6	42	I/O	5VT	Default: PB6 Alternate: I2C0_SCL, USART0_TX, TIMER15_CH0_ON
PB7	43	I/O	5VT	Default: PB7 Alternate: I2C0_SDA, USART0_RX, TIMER16_CH0_ON
BOOT0	44	I		Default: BOOT0
PB8	45	I/O	5VT	Default: PB8 Alternate: I2C0_SCL, TIMER15_CH0,
PB9	46	I/O	5VT	Default: PB9 Alternate: I2C0_SDA, IFRP_OUT, TIMER16_CH0, EVENTOUT
VSS	47	P		Default: VSS
VDD	48	P		Default: VDD

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Functions are available on GD32F130C4 devices only.

(4) Functions are available on GD32F130C8/6 devices.

(5) Functions are available on GD32F130C8 devices.

(6) Functions are available on GD32F130C4/6 devices.

2.6.3. GD32F130Kx LQFP32 pin definitions

Table 2-5. GD32F130Kx LQFP32 pin definitions

GD32F130Kx LQFP32				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
VDD	1	P		Default: VDD
PF0-OSCIN	2	I/O	5VT	Default: PF0 Additional: OSCIN
PF1-OSCOUT	3	I/O	5VT	Default: PF1 Additional: OSCOUT
NRST	4	I/O		Default: NRST
VDDA	5	P		Default: VDDA
PA0-WKUP	6	I/O		Default: PA0 Alternate: USART0_CTS(3), USART1_CTS(4), TIMER1_CH0, TIMER1_ETI, I2C1_SCL(5) Additional: ADC_IN0, RTC_TAMP1, WKUP0
PA1	7	I/O		Default: PA1 Alternate: USART0_RTS(3)/USART0_DE(3), USART1_RTS(4)/USART1_DE(4), TIMER1_CH1, I2C1_SDA(5), EVENTOUT Additional: ADC_IN1
PA2	8	I/O		Default: PA2 Alternate: USART0_TX(3), USART1_TX(4), TIMER1_CH2, TIMER14_CH0 Additional: ADC_IN2
PA3	9	I/O		Default: PA3 Alternate: USART0_RX(3), USART1_RX(4), TIMER1_CH3, TIMER14_CH1 Additional: ADC_IN3
PA4	10	I/O		Default: PA4 Alternate: SPI0_NSS, USART0_CK(3), USART1_CK(4), TIMER13_CH0, SPI1_NSS(5) Additional: ADC_IN4
PA5	11	I/O		Default: PA5 Alternate: SPI0_SCK, TIMER1_CH0, TIMER1_ETI

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Kx LQFP32				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Additional: ADC_IN5
PA6	12	I/O		Default: PA6 Alternate: SPI0_MISO, TIMER2_CH0, TIMER0_BRKIN, TIMER15_CH0, EVENTOUT Additional: ADC_IN6
PA7	13	I/O		Default: PA7 Alternate: SPI0_MOSI, TIMER2_CH1, TIMER13_CH0, TIMER0_CH0_ON, TIMER16_CH0, EVENTOUT Additional: ADC_IN7
PB0	14	I/O		Default: PB0 Alternate: TIMER2_CH2, TIMER0_CH1_ON, USART1_RX(4), EVENTOUT Additional: ADC_IN8
PB1	15	I/O		Default: PB1 Alternate: TIMER2_CH3, TIMER13_CH0, TIMER0_CH2_ON, SPI1_SCK(5) Additional: ADC_IN9
VSS	16	P	5VT	Default: VSS
VDD	17	P		Default: VDD
PA8	18	I/O	5VT	Default: PA8 Alternate: USART0_CK, TIMER0_CH0, CK_OUT, USART1_TX(4), EVENTOUT
PA9	19	I/O	5VT	Default: PA9 Alternate: USART0_TX, TIMER0_CH1, TIMER14_BRKIN, I2C0_SCL
PA10	20	I/O	5VT	Default: PA10 Alternate: USART0_RX, TIMER0_CH2, TIMER16_BRKIN, I2C0_SDA
PA11	21	I/O	5VT	Default: PA11 Alternate: USART0_CTS, TIMER0_CH3, EVENTOUT
PA12	22	I/O	5VT	Default: PA12 Alternate: USART0_RTS/USART0_DE, TIMER0_ETI, EVENTOUT
PA13	23	I/O	5VT	Default: PA13 Alternate: IFRP_OUT, SWDIO, SPI1_MISO(5)
PA14	24	I/O	5VT	Default: PA14 Alternate: USART0_TX(3), USART1_TX(4), SWCLK, SPI1_MOSI(5)
PA15	25	I/O	5VT	Default: PA15 Alternate: SPI0_NSS, USART0_RX(3), USART1_RX(4), TIMER1_CH0, TIMER1_ETI, SPI1_NSS(5), EVENTOUT
PB3	26	I/O	5VT	Default: PB3

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Kx LQFP32				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Alternate: SPI0_SCK, TIMER1_CH1, EVENTOUT
PB4	27	I/O	5VT	Default: PB4 Alternate: SPI0_MISO, TIMER2_CH0, EVENTOUT
PB5	28	I/O	5VT	Default: PB5 Alternate: SPI0_MOSI, I2C0_SMBA, TIMER15_BRKIN, TIMER2_CH1
PB6	29	I/O	5VT	Default: PB6 Alternate: I2C0_SCL, USART0_TX, TIMER15_CH0_ON
PB7	30	I/O	5VT	Default: PB7 Alternate: I2C0_SDA, USART0_RX, TIMER16_CH0_ON
BOOT0	31	I		Default: BOOT0
VSS	32	P		Default: VSS

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Functions are available on GD32F130K4 devices only.

(4) Functions are available on GD32F130K8/6 devices.

(5) Functions are available on GD32F130K8 devices.

2.6.4. GD32F130Kx QFN32 pin definitions

Table 2-6. GD32F130Kx QFN32 pin definitions

GD32F130Kx QFN32				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
VDD	1	P		Default: VDD
PF0-OSCIN	2	I/O	5VT	Default: PF0 Additional: OSCIN
PF1-OSCOUT	3	I/O	5VT	Default: PF1 Additional: OSCOUT
NRST	4	I/O		Default: NRST
VDDA	5	P		Default: VDDA
PA0-WKUP	6	I/O		Default: PA0 Alternate: USART0_CTS(3), USART1_CTS(4), TIMER1_CH0, TIMER1_ETI, I2C1_SCL(5) Additional: ADC_IN0, RTC_TAMP1, WKUP0
PA1	7	I/O		Default: PA1

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Kx QFN32				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Alternate: USART0_RTS(3)/USART0_DE(3), USART1_RTS(4)/USART1_DE(4), TIMER1_CH1, I2C1_SDA(5), EVENTOUT Additional: ADC_IN1
PA2	8	I/O		Default: PA2 Alternate: USART0_TX(3), USART1_TX(4), TIMER1_CH2, TIMER14_CH0 Additional: ADC_IN2
PA3	9	I/O		Default: PA3 Alternate: USART0_RX(3), USART1_RX(4), TIMER1_CH3, TIMER14_CH1 Additional: ADC_IN3
PA4	10	I/O		Default: PA4 Alternate: SPI0_NSS, USART0_CK(3), USART1_CK(4), TIMER13_CH0, SPI1_NSS(5) Additional: ADC_IN4
PA5	11	I/O		Default: PA5 Alternate: SPI0_SCK, TIMER1_CH0, TIMER1_ETI Additional: ADC_IN5
PA6	12	I/O		Default: PA6 Alternate: SPI0_MISO, TIMER2_CH0, TIMER0_BRKIN, TIMER15_CH0, EVENTOUT Additional: ADC_IN6
PA7	13	I/O		Default: PA7 Alternate: SPI0_MOSI, TIMER2_CH1, TIMER13_CH0, TIMER0_CH0_ON, TIMER16_CH0, EVENTOUT Additional: ADC_IN7
PB0	14	I/O		Default: PB0 Alternate: TIMER2_CH2, TIMER0_CH1_ON, USART1_RX(4), EVENTOUT Additional: ADC_IN8
PB1	15	I/O		Default: PB1 Alternate: TIMER2_CH3, TIMER13_CH0, TIMER0_CH2_ON, SPI1_SCK(5) Additional: ADC_IN9
PB2	16	I/O	5VT	Default: PB2
VDD	17	P		Default: VDD
PA8	18	I/O	5VT	Default: PA8 Alternate: USART0_CK, TIMER0_CH0, CK_OUT, USART1_TX(4), EVENTOUT
PA9	19	I/O	5VT	Default: PA9 Alternate: USART0_TX, TIMER0_CH1, TIMER14_BRKIN,

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Kx QFN32				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				I2C0_SCL
PA10	20	I/O	5VT	Default: PA10 Alternate: USART0_RX, TIMER0_CH2, TIMER16_BRKIN, I2C0_SDA
PA11	21	I/O	5VT	Default: PA11 Alternate: USART0_CTS, TIMER0_CH3, EVENTOUT
PA12	22	I/O	5VT	Default: PA12 Alternate: USART0_RTS/USART0_DE, TIMER0_ETI, EVENTOUT
PA13	23	I/O	5VT	Default: PA13 Alternate: IFRP_OUT, SWDIO, SPI1_MISO(5)
PA14	24	I/O	5VT	Default: PA14 Alternate: USART0_TX(3), USART1_TX(4), SWCLK, SPI1_MOSI(5)
PA15	25	I/O	5VT	Default: PA15 Alternate: SPI0_NSS, USART0_RX(3), USART1_RX(4), TIMER1_CH0, TIMER1_ETI, SPI1_NSS(5), EVENTOUT
PB3	26	I/O	5VT	Default: PB3 Alternate: SPI0_SCK, TIMER1_CH1, EVENTOUT
PB4	27	I/O	5VT	Default: PB4 Alternate: SPI0_MISO, TIMER2_CH0, EVENTOUT
PB5	28	I/O	5VT	Default: PB5 Alternate: SPI0_MOSI, I2C0_SMBA, TIMER15_BRKIN, TIMER2_CH1
PB6	29	I/O	5VT	Default: PB6 Alternate: I2C0_SCL, USART0_TX, TIMER15_CH0_ON
PB7	30	I/O	5VT	Default: PB7 Alternate: I2C0_SDA, USART0_RX, TIMER16_CH0_ON
BOOT0	31	I		Default: BOOT0
PB8	32	I/O	5VT	Default: PB8 Alternate: I2C0_SCL, TIMER15_CH0

Notes:

(6) Type: I = input, O = output, P = power.

(7) I/O Level: 5VT = 5 V tolerant.

(8) Functions are available on GD32F130K4 devices only.

(9) Functions are available on GD32F130K8/6 devices.

(10) Functions are available on GD32F130K8 devices.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.6.5. GD32F130Gx QFN28 pin definitions

Table 2-7. GD32F130Gx QFN28 pin definitions

GD32F130Gx QFN28				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
BOOT0	1	I		Default: BOOT0
PF0-OSCIN	2	I/O	5VT	Default: PF0 Additional: OSCIN
PF1-OSCOUT	3	I/O	5VT	Default: PF1 Additional: OSCOUT
NRST	4	I/O		Default: NRST
VDDA	5	P		Default: VDDA
PA0-WKUP	6	I/O		Default: PA0 Alternate: USART0_CTS(3), USART1_CTS(4), TIMER1_CH0, TIMER1_ETI, I2C1_SCL(5) Additional: ADC_IN0, RTC_TAMP1, WKUP0
PA1	7	I/O		Default: PA1 Alternate: USART0_RTS(3)/USART0_DE(3), USART1_RTS(4)/USART1_DE(4), TIMER1_CH1, I2C1_SDA(5), EVENTOUT Additional: ADC_IN1
PA2	8	I/O		Default: PA2 Alternate: USART0_TX(3), USART1_TX(4), TIMER1_CH2, TIMER14_CH0 Additional: ADC_IN2
PA3	9	I/O		Default: PA3 Alternate: USART0_RX(3), USART1_RX(4), TIMER1_CH3, TIMER14_CH1 Additional: ADC_IN3
PA4	10	I/O		Default: PA4 Alternate: SPI0_NSS, USART0_CK(3), USART1_CK(4), TIMER13_CH0, SPI1_NSS(5) Additional: ADC_IN4
PA5	11	I/O		Default: PA5 Alternate: SPI0_SCK, TIMER1_CH0, TIMER1_ETI Additional: ADC_IN5
PA6	12	I/O		Default: PA6 Alternate: SPI0_MISO, TIMER2_CH0, TIMER0_BRKIN, TIMER15_CH0, EVENTOUT Additional: ADC_IN6
PA7	13	I/O		Default: PA7 Alternate: SPI0_MOSI, TIMER2_CH1, TIMER13_CH0, TIMER0_CH0_ON, TIMER16_CH0, EVENTOUT

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Gx QFN28				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Additional: ADC_IN7
PB0	14	I/O		Default: PB0 Alternate: TIMER2_CH2, TIMER0_CH1_ON, USART1_RX(4), EVENTOUT Additional: ADC_IN8
PB1	15	I/O		Default: PB1 Alternate: TIMER2_CH3, TIMER13_CH0, TIMER0_CH2_ON, SPI1_SCK(5) Additional: ADC_IN9
VSS	16	P		Default: VSS
VDD	17	P		Default: VDD
PA8	18	I/O	5VT	Default: PA8 Alternate: USART0_CK, TIMER0_CH0, CK_OUT, USART1_TX(4), EVENTOUT
PA9	19	I/O	5VT	Default: PA9 Alternate: USART0_TX, TIMER0_CH1, TIMER14_BRKIN , I2C0_SCL
PA10	20	I/O	5VT	Default: PA10 Alternate: USART0_RX, TIMER0_CH2, TIMER16_BRKIN, I2C0_SDA
PA13	21	I/O	5VT	Default: PA13 Alternate: IFRP_OUT, SWDIO, SPI1_MISO(5)
PA14	22	I/O	5VT	Default: PA14 Alternate: USART0_TX(3), USART1_TX(4), SWCLK, SPI1_MOSI(5)
PA15	23	I/O	5VT	Default: PA15 Alternate: SPI0_NSS, USART0_RX(3), USART1_RX(4), TIMER1_CH0, TIMER1_ETI, SPI1_NSS(5), EVENTOUT
PB3	24	I/O	5VT	Default: PB3 Alternate: SPI0_SCK, TIMER1_CH1, EVENTOUT
PB4	25	I/O	5VT	Default: PB4 Alternate: SPI0_MISO, TIMER2_CH0, EVENTOUT
PB5	26	I/O	5VT	Default: PB5 Alternate: SPI0_MOSI, I2C0_SMBA, TIMER15_BRKIN, TIMER2_CH1
PB6	27	I/O	5VT	Default: PB6 Alternate: I2C0_SCL, USART0_TX, TIMER15_CH0_ON
PB7	28	I/O	5VT	Default: PB7 Alternate: I2C0_SDA, USART0_RX, TIMER16_CH0_ON

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

(3) Functions are available on GD32F130G4 devices only.
(4) Functions are available on GD32F130G8/6 devices.
(5) Functions are available on GD32F130G8 devices.

2.6.6. GD32F130Fx TSSOP20 pin definitions

Table 2-8. GD32F130Fx TSSOP20 pin definitions

GD32F130Fx TSSOP20				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
BOOT0	1	I		Default: BOOT0
PF0-OSCIN	2	I/O	5VT	Default: PF0 Additional: OSCIN
PF1-OSCOUT	3	I/O	5VT	Default: PF1 Additional: OSCOUT
NRST	4	I/O		Default: NRST
VDDA	5	P		Default: VDDA
PA0-WKUP	6	I/O		Default: PA0 Alternate: USART0_CTS(3), USART1_CTS(4), TIMER1_CH0, TIMER1_ETI, I2C1_SCL(5) Additional: ADC_IN0, RTC_TAMP1, WKUP0
PA1	7	I/O		Default: PA1 Alternate: USART0_RTS(3)/USART0_DE(3), USART1_RTS(4)/USART1_DE(4), TIMER1_CH1, I2C1_SDA(5), EVENTOUT Additional: ADC_IN1
PA2	8	I/O		Default: PA2 Alternate: USART0_TX(3), USART1_TX(4), TIMER1_CH2, TIMER14_CH0 Additional: ADC_IN2
PA3	9	I/O		Default: PA3 Alternate: USART0_RX(3), USART1_RX(4), TIMER1_CH3, TIMER14_CH1 Additional: ADC_IN3
PA4	10	I/O		Default: PA4 Alternate: SPI0_NSS, USART0_CK(3), USART1_CK(4), TIMER13_CH0, SPI1_NSS(5) Additional: ADC_IN4
PA5	11	I/O		Default: PA5 Alternate: SPI0_SCK, TIMER1_CH0, TIMER1_ETI Additional: ADC_IN5
PA6	12	I/O		Default: PA6 Alternate: SPI0_MISO, TIMER2_CH0, TIMER0_BRKIN, TIMER15_CH0, EVENTOUT

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

GD32F130Fx TSSOP20				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description**
				Additional: ADC_IN6
PA7	13	I/O		Default: PA7 Alternate: SPI0_MOSI, TIMER2_CH1, TIMER13_CH0, TIMER0_CH0_ON, TIMER16_CH0, EVENTOUT Additional: ADC_IN7
PB1	14	I/O		Default: PB1 Alternate: TIMER2_CH3, TIMER13_CH0, TIMER0_CH2_ON, SPI1_SCK(5) Additional: ADC_IN9
VSS	15	P		Default: VSS
VDD	16	P		Default: VDD
PA9	17	I/O	5VT	Default: PA9 Alternate: USART0_TX, TIMER0_CH1, TIMER14_BRKIN, I2C0_SCL
PA10	18	I/O	5VT	Default: PA10 Alternate: USART0_RX, TIMER0_CH2, TIMER16_BRKIN, I2C0_SDA
PA13	19	I/O	5VT	Default: PA13 Alternate: IFRP_OUT, SWDIO, SPI1_MISO(5)
PA14	20	I/O	5VT	Default: PA14 Alternate: USART0_TX(3), USART1_TX(4), SWCLK, SPI1_MOSI(5)

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Functions are available on GD32F130F4 devices only.

(4) Functions are available on GD32F130F8/6 devices.

(5) Functions are available on GD32F130F8 devices.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2.6.7. GD32F130xx pin alternate functions

Table 2-9. Port A alternate functions summary

Pin Name	AF0	AF1	AF2	AF3	AF4	AF5	AF6
PA0		USART0_CTS(1) USART1_CTS(2)	TIMER1_CH0 TIMER1_ETI		I2C1_SCL(3)		
PA1	EVENTOUT	USART0_RTS(1)/USART0_DE(1) USART1_RTS(2)/USART1_DE(2)	TIMER1_CH1		I2C1_SDA(3)		
PA2	TIMER14_CH0	USART0_TX(1) USART1_TX(2)	TIMER1_CH2				
PA3	TIMER14_CH1	USART0_RX(1) USART1_RX(2)	TIMER1_CH3				
PA4	SPI0_NSS	USART0_CK(1) USART1_CK(2)			TIMER13_CH0		SPI1_NSS(3)
PA5	SPI0_SCK		TIMER1_CH0 TIMER1_ETI				
PA6	SPI0_MISO	TIMER2_CH0	TIMER0_BRKIN			TIMER15_CH0	EVENTOUT
PA7	SPI0_MOSI	TIMER2_CH1	TIMER0_CH0_ON		TIMER13_CH0	TIMER16_CH0	EVENTOUT
PA8	CK_OUT	USART0_CK	TIMER0_CH0	EVENTOUT	USART1_TX(2)		
PA9	TIMER14_BRKIN	USART0_TX	TIMER0_CH1		I2C0_SCL		
PA10	TIMER16_BRKIN	USART0_RX	TIMER0_CH2		I2C0_SDA		
PA11	EVENTOUT	USART0_CTS	TIMER0_CH3				
PA12	EVENTOUT	USART0_RTS/USART	TIMER0_ETI				

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

		0_DE					
PA13	SWDIO	IFRP_OUT					SPI1_MISO(3)
PA14	SWCLK	USART0_TX(1) USART1_TX(2)					SPI1_MOSI(3)
PA15	SPI0_NSS	USART0_RX(1) USART1_RX(2)	TIMER1_CH0 TIMER1_ETI	EVENTOUT			SPI1_NSS(3)

Notes:

(1) Functions are available on GD32F130x4 devices only.

(2) Functions are available on GD32F130x8/6 devices.

(3) Functions are available on GD32F130x8 devices.

Table 2-10. Port B alternate functions summary

Pin Name	AF0	AF1	AF2	AF3	AF4	AF5	AF6
PB0	EVENTOUT	TIMER2_CH2	TIMER0_CH1_ON		USART1_RX(2)		
PB1	TIMER13_CH0	TIMER2_CH3	TIMER0_CH2_ON				SPI1_SCK(3)
PB2							
PB3	SPI0_SCK	EVETOUT	TIMER1_CH1				
PB4	SPI0_MISO	TIMER2_CH0	EVENTOUT				
PB5	SPI0_MOSI	TIMER2_CH1	TIMER15_BRKIN	I2C0_SMBA			
PB6	USART0_TX	I2C0_SCL	TIMER15_CH0_ON				
PB7	USART0_RX	I2C0_SDA	TIMER16_CH0_ON				
PB8		I2C0_SCL	TIMER15_CH0				
PB9	IFRP_OUT	I2C0_SDA	TIMER16_CH0	EVENTOUT			
PB10		I2C1_SCL(3)	TIMER1_CH2				
PB11	EVENTOUT	I2C1_SDA(3)	TIMER1_CH3				
PB12	SPI0_NSS(1) SPI1_NSS(	EVENTOUT	TIMER0_BRKIN		I2C1_SMBA(3)		

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

	3)						
PB13	SPI0_SCK(1) SPI1_SCK(3)		TIMER0_CH0_ON				
PB14	SPI0_MISO(1) SPI1_MISO(3)	TIMER14_CH0	TIMER0_CH1_ON				
PB15	SPI0_MOSI(1) SPI1_MOSI(3)	TIMER14_CH1	TIMER0_CH2_ON	TIMER14_CH0_ON			

Notes:

(1) Functions are available on GD32F130x4 devices only.

(2) Functions are available on GD32F130x8/6 devices.

(3) Functions are available on GD32F130x8 devices.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 2-11. Port C & D & F alternate functions summary

Pin Name	AF0	AF1	AF2	AF3	AF4	AF5	AF6
PC0	EVENTOUT						
PC1	EVENTOUT						
PC2	EVENTOUT						
PC3	EVENTOUT						
PC4	EVENTOUT						
PC6	TIMER2_CH0						
PC7	TIMER2_CH1						
PC8	TIMER2_CH2						
PC9	TIMER2_CH3						
PD2	TIMER2_ETI						
PF4	SPI1_NSS, EVENTOUT						
PF5	EVENTOUT						
PF6	I2C0_SCL(1) I2C1_SCL(2)						
PF7	I2C0_SDA(1) I2C1_SDA(2)						

Notes:

(1) Functions are available on GD32F130x4/6 devices.

(2) Functions are available on GD32F130x8 devices only.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3. Functional description

3.1. Arm® Cortex®-M3 core

The Cortex®-M3 processor is the latest generation of Arm® processors for embedded systems. It has been developed to provide a low-cost platform that meets the needs of MCU implementation, with a reduced pin count and low-power consumption, while delivering outstanding computational performance and an advanced system response to interrupts.

- 32-bit Arm® Cortex®-M3 processor core
- Up to 48 MHz operation frequency
- Single-cycle multiplication and hardware divider
- Integrated Nested Vectored Interrupt Controller (NVIC)
- 24-bit SysTick timer

The Cortex®-M3 processor is based on the Armv7 architecture and supports both Thumb and Thumb-2 instruction sets. Some system peripherals listed below are also provided by Cortex®-M3:

- Internal Bus Matrix connected with ICode bus, DCode bus, system bus, Private Peripheral Bus (PPB) and debug accesses (AHB-AP)
- Nested Vectored Interrupt Controller (NVIC)
- Flash Patch and Breakpoint (FPB)
- Data Watchpoint and Trace (DWT)
- Instrument Trace Macrocell (ITM)
- Serial Wire JTAG Debug Port (SWJ-DP)
- Trace Port Interface Unit (TPIU)

3.2. On-chip memory

- Up to 64 Kbytes of Flash memory
- The region of the MCU executing instructions without waiting time is up to 32K bytes (in case that the Flash size equal to 16K or 32K, all memory is no waiting time). A long time delay when CPU fetches the instructions out of the range.
- Up to 8 Kbytes of SRAM with hardware parity checking

The Arm® Cortex®-M3 processor is structured in Harvard architecture which can use separate buses to fetch instructions and load/store data. 64 Kbytes of inner Flash at most, which includes code Flash and data Flash is available for storing programs and data, and there is no waiting time within code Flash area when CPU executes instructions. The ***Table 2-2. GD32F130xx memory map*** shows the memory map of the GD32F130xx series of devices, including code, SRAM, peripheral, and other pre-defined regions.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3.3. Clock, reset and supply management

- Internal 8 MHz factory-trimmed RC and external 4 to 32 MHz crystal oscillator
- Internal 40 KHz RC calibrated oscillator and external 32.768 KHz crystal oscillator
- Integrated system clock PLL
- 2.6 to 3.6 V application supply and I/Os
- Supply Supervisor: POR (Power On Reset), PDR (Power Down Reset), and low voltage detector (LVD)

The Clock Control Unit (CCU) provides a range of oscillator and clock functions. These include speed internal RC oscillator and external crystal oscillator, high speed and low speed two types. Several prescalers allow the frequency configuration of the AHB and two APB domains. The maximum frequency of the AHB and two APB domains is 48 MHz. See ***Figure 2-8. GD32F130xx clock tree*** for details on the clock tree.

GD32F1x0 Reset Control includes the control of three kinds of reset: power reset, system reset and backup domain reset. A system reset resets the processor core and peripheral IP components with the exception of the SW-DP controller and the Backup domain. Power-on reset (POR) and power-down reset (PDR) are always active, and ensures proper operation starting from 2.6 V and down to 1.8V. The device remains in reset mode when V_{DD} is below a specified threshold. The embedded low voltage detector (LVD) monitors the power supply, compares it to the voltage threshold and generates an interrupt as a warning message for leading the MCU into security.

Power supply schemes:

- V_{DD} range: 2.6 to 3.6 V, external power supply for I/Os and the internal regulator. Provided externally through VDD pins.
- V_{SSA}, V_{DDA} range: 2.6 to 3.6 V, external analog power supplies for ADC, reset blocks, RCs and PLL. VDDA and VSSA must be connected to VDD and VSS, respectively.
- V_{BAT} range: 1.8 to 3.6 V, power supply for RTC, external clock 32 KHz oscillator and backup registers (through power switch) when V_{DD} is not present.

3.4. Boot modes

At startup, boot pins are used to select one of three boot options:

- Boot from main Flash memory (default)
- Boot from system memory
- Boot from on-chip SRAM

In default condition, boot from main Flash memory is selected. The boot loader is located in the internal boot ROM memory (system memory). It is used to reprogram the Flash memory by using USART0 (PA9 and PA10) or USART1 (PA2 and PA3, PA14 and PA15).

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3.5. Power saving modes

The MCU supports three kinds of power saving modes to achieve even lower power consumption. They are sleep mode, deep-sleep mode, and standby mode. These operating modes reduce the power consumption and allow the application to achieve the best balance between the CPU operating time, speed and power consumption.

- **Sleep** mode
  In sleep mode, only the clock of CPU core is off. All peripherals continue to operate and any interrupt/event can wake up the system.
- **Deep-sleep** mode
  In deep-sleep mode, all clocks in the 1.2V domain are off, and all of the high speed crystal oscillator (IRC8M, HXTAL) and PLL are disabled. Only the contents of SRAM and registers are retained. Any interrupt or wakeup event from EXTI lines can wake up the system from the deep-sleep mode including the 16 external lines, the RTC alarm, the LVD output, the RTC tamper and timestamp, the USART0 wakeup and the CEC wakeup. When exiting the deep-sleep mode, the IRC8M is selected as the system clock.
- **Standby** mode
  In standby mode, the whole 1.2V domain is power off, the LDO is shut down, and all of IRC8M, HXTAL and PLL are disabled. The contents of SRAM and registers (except Backup registers) are lost. There are four wakeup sources for the standby mode, including the external reset from NRST pin, the RTC alarm, the FWDGT reset, and the rising edge on WKUP pin.

3.6. Analog to digital converter (ADC)

- 12-bit SAR ADC's conversion rate is up to 1 MSPS.
- Input voltage range: V_{SSA} to V_{DDA} (2.6 to 3.6 V).
- Temperature sensor.

One 12-bit 1 MSPS multi-channel ADCs are integrated in the device. It is a total of up to 16 multiplexed external channels, 1 channel for internal temperature sensor (V_{SENSE}), 1 channel for internal reference voltage (V_{REFINT}) and 1 channel for battery voltage (V_{BAT}). The input voltage range is between V_{SSA} and V_{DDA}. An analog watchdog block can be used to detect the channels, which are required to remain within a specific threshold window. A configurable channel management block of analog inputs also can be used to perform conversions in single, continuous, scan or discontinuous mode to support more advanced use.

The ADC can be triggered from the events generated by the general timers (TIMERx, x=1,2,14) and the advanced timers (TIMER0) with internal connection.The temperature sensor can be used to generate a voltage that varies linearly with temperature. It is internally connected to the ADC_IN16 input channel which is used to convert the sensor output voltage into a digital value. Each device is factory-calibrated to improve the accuracy and the calibration data are stored in the system memory area.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3.7. DMA

- 7 channel DMA controller
- Peripherals supported: Timers, ADC, SPIs, I2Cs, USARTs

The flexible general-purpose DMA controllers provide a hardware method of transferring data between peripherals and/or memory without intervention from the CPU, thereby freeing up bandwidth for other system functions. Three types of access method are supported: peripheral to memory, memory to peripheral, memory to memory.

Each channel is connected to fixed hardware DMA requests. The priorities of DMA channel requests are determined by software configuration and hardware channel number. Transfer size of source and destination are independent and configurable.

3.8. General-purpose inputs/outputs (GPIOs)

- Up to 55 fast GPIOs, all mappable on 16 external interrupt lines
- Analog input/output configurable
- Alternate function input/output configurable

There are up to 55 general purpose I/O pins (GPIO) in GD32F130xx, named PA0 ~ PA15 and PB0 ~ PB15, PC0 ~ PC15, PD2, PF0, PF1, PF4-PF7 to implement logic input/output functions. Each of the GPIO ports has related control and configuration registers to satisfy the requirements of specific applications. The external interrupts on the GPIO pins of the device have related control and configuration registers in the Interrupt/event controller (EXTI). The GPIO ports are pin-shared with other alternative functions (AFs) to obtain maximum flexibility on the package pins. Each of the GPIO pins can be configured by software as output (push-pull or open-drain), as input (with or without pull-up or pull-down) or as peripheral alternate function. Most of the GPIO pins are shared with digital or analog alternate functions. All GPIOs are high-current capable except for analog inputs.

3.9. Timers and PWM generation

- One 16-bit advanced timer (TIMER0), one 32-bit general timer (TIMER1) and five 16-bit general timers (TIMER2, TIMER13 ~ TIMER16)
- Up to 4 independent channels of PWM, output compare or input capture for each general timer and external trigger input
- 16-bit, motor control PWM advanced timer with programmable dead-time generation for output match
- Encoder interface controller with two inputs using quadrature decoder
- 24-bit SysTick timer down counter
- 2 watchdog timers (free watchdog timer and window watchdog timer)

The advanced timer (TIMER0) can be used as a three-phase PWM multiplexed on 6 channels.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

It has complementary PWM outputs with programmable dead-time generation. It can also be used as a complete general timer. The 4 independent channels can be used for input capture, output compare, generation of PWM waveform (edge-aligned or center-aligned mode) and single pulse mode output. If configured as a general 16-bit timer, it has the same functions as the TIMERx timer. It can be synchronized with external signals or to interconnect with other general timers together which have the same architecture and features.

The general timer can be used for a variety of purposes including general time, input signal pulse width measurement or output waveform generation such as a single pulse generation or PWM output, up to 4 independent channels for input capture/output compare. TIMER1 is based on a 32-bit auto-reload up/downcounter and a 16-bit prescaler. TIMER2 is based on a 16-bit auto-reload up/downcounter and a 16-bit prescaler. TIMER13 ~ TIMER16 is based on a 16-bit auto-reload upcounter and a 16-bit prescaler. The general timer also supports an encoder interface with two inputs using quadrature decoder.

The GD32F130xx have two watchdog peripherals, free watchdog timer and window watchdog timer. They offer a combination of high safety level, flexibility of use and timing accuracy.

The free watchdog timer includes a 12-bit down-counting counter and an 8-bit prescaler, It is clocked from an independent 40 KHz internal RC and as it operates independently of the main clock, it can operate in deep-sleep and standby modes. It can be used either as a watchdog to reset the device when a problem occurs, or as a free-running timer for application timeout management.

The window watchdog timer is based on a 7-bit down counter that can be set as free-running. It can be used as a watchdog to reset the device when a problem occurs. It is clocked from the main clock. It has an early wake up interrupt capability and the counter can be frozen in debug mode.

The SysTick timer is dedicated for OS, but could also be used as a standard down counter. The features are shown below:

- A 24-bit down counter
- Auto reload capability
- Maskable system interrupt generation when the counter reaches 0
- Programmable clock source

3.10. Real time clock (RTC)

- Independent binary-coded decimal (BCD) format timer/counter with five 32-bit backup registers
- Calendar with subsecond, seconds, minutes, hours, week day, date, year and month automatically correction
- Alarm function with wake up from deep-sleep and standby mode capability
- On-the-fly correction for synchronization with master clock. Digital calibration with 1 ppm resolution for compensation of quartz crystal inaccuracy

The real time clock is an independent timer which provides a set of continuously running

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

counters in backup registers to provide a real calendar function, and provides an alarm interrupt or an expected interrupt. It is not reset by a system or power reset, or when the device wakes up from standby mode. In the RTC unit, there are two prescalers used for implementing the calendar and other functions. One prescaler is a 7-bit asynchronous prescaler and the other is a 15-bit synchronous prescaler.

3.11. Inter-integrated circuit (I2C)

- Up to two I2Cs bus interfaces can support both master and slave mode with a frequency up to 400 KHz
- Provide arbitration function, optional PEC (packet error checking) generation and checking
- Supports 7-bit and 10-bit addressing mode and general call addressing mode

The I2C interface is an internal circuit allowing communication with an external I2C interface which is an industry standard two line serial interface used for connection to external hardware. These two serial lines are known as a serial data line (SDA) and a serial clock line (SCL). The I2C module provides transfer rate of up to 100 KHz in standard mode and up to 400 KHz in fast mode. The I2C module also has an arbitration detect function to prevent the situation where more than one master attempts to transmit data to the I2C bus at the same time. A CRC-8 calculator is also provided in I2C interface to perform packet error checking for I2C data.

3.12. Serial peripheral interface (SPI)

- Up to two SPIs interfaces with a frequency of up to 18 MHz
- Support both master and slave mode
- Hardware CRC calculation and transmit automatic CRC error checking

The SPI interface uses 4 pins, among which are the serial data input and output lines (MISO & MOSI), the clock line (SCK) and the slave select line (NSS). Both SPIs can be served by the DMA controller. The SPI interface may be used for a variety of purposes, including simplex synchronous transfers on two lines with a possible bidirectional data line or reliable communication using CRC checking.

3.13. Universal synchronous asynchronous receiver transmitter (USART)

- Up to two USARTs with operating speed up to 6 Mbit/s
- Supports both asynchronous and clocked synchronous serial communication modes
- IrDA SIR encoder and decoder support
- LIN break generation and detection

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

- ISO 7816-3 compliant smart card interface

The USART (USART0, USART1) are used to translate data between parallel and serial interfaces, provides a flexible full duplex data exchange using synchronous or asynchronous transfer. It is also commonly used for RS-232 standard communication. The USART includes a programmable baud rate generator which is capable of dividing the system clock to produce a dedicated clock for the USART transmitter and receiver. The USART also supports DMA function for high speed data communication.

3.14. Debug mode

- Serial wire JTAG debug port (SWJ-DP)

The Arm® SWJ-DP Interface is embedded and is a combined JTAG and serial wire debug port that enables either a serial wire debug or a JTAG probe to be connected to the target.

3.15. Package and operation temperature

- LQFP64 (GD32F130Rx), LQFP48 (GD32F130Cx), LQFP32 (GD32F130Kx), QFN32 (GD32F130Kx), QFN28 (GD32F130Gx) and TSSOP20 (GD32F130Fx)
- Operation temperature range: -40°C to +85°C (industrial level)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4. Electrical characteristics

4.1. Absolute maximum ratings

The maximum ratings are the limits to which the device can be subjected without permanently damaging the device. Note that the device is not guaranteed to operate properly over the maximum ratings. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

Table 4-1. Absolute maximum ratings(1)(4)

Symbol	Parameter	Min	Max	Unit
V_{DD}	External voltage range(2)	V_{SS} - 0.3	V_{SS} + 3.6	V
V_{DDA}	External analog supply voltage	V_{SSA} - 0.3	V_{SSA} + 3.6	V
V_{BAT}	External battery supply voltage	V_{SS} - 0.3	V_{SS} + 3.6	V
V_{IN}	Input voltage on 5V tolerant pin(3)	V_{SS} - 0.3	V_{DD} + 4.0	V
	Input voltage on other I/O	V_{SS} - 0.3	4.0	V
$\|\Delta V_{DDX}\|$	Variations between different VDD power pins	—	50	mV
$\|V_{SSX} - V_{SS}\|$	Variations between different ground pins	—	50	mV
I_{IO}	Maximum current for GPIO pins	—	±25	mA
T_A	Operating temperature range	-40	+85	°C
P_D	Power dissipation at T_A = 85°C of LQFP64	—	629	mW
	Power dissipation at T_A = 85°C of LQFP48	—	621	
	Power dissipation at T_A = 85°C of LQFP32	—	605	
	Power dissipation at T_A = 85°C of QFN32	—	825	
	Power dissipation at T_A = 85°C of QFN28	—	605	
	Power dissipation at T_A = 85°C of TSSOP20	—	482	
T_{STG}	Storage temperature range	-55	+150	°C
T_J	Maximum junction temperature	—	+125	°C

(1) Guaranteed by design, not tested in production.

(2) All main power and ground pins should be connected to an external power source within the allowable range.

(3) VIN maximum value cannot exceed 5.5 V.

(4) It is recommended that V_{DD} and V_{DDA} are powered by the same source. The maximum difference between V_{DD} and V_{DDA} does not exceed 300 mV during power-up and operation.

4.2. Operating conditions characteristics

Table 4-2. DC operating conditions

Symbol	Parameter	Conditions	Min	Typ	Max(1)	Unit
V_{DD}	Supply voltage	—	2.6	3.3	3.6	V
V_{DDA}	Analog supply voltage	Same as V_{DD}	2.6	3.3	3.6	V
V_{BAT}	Battery supply voltage	—	1.8(2)	—	3.6	V


(1) Based on characterization, not tested in production.

(2) In the application which V_{BAT} supply the backup domains, if the V_{BAT} voltage drops below the minimum value,

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

when V_{DD} is powered on again, it is necessary to refresh the registers of backup domains and enable LXTAL again.

Figure 4-1. Recommended power supply decoupling capacitors(1)

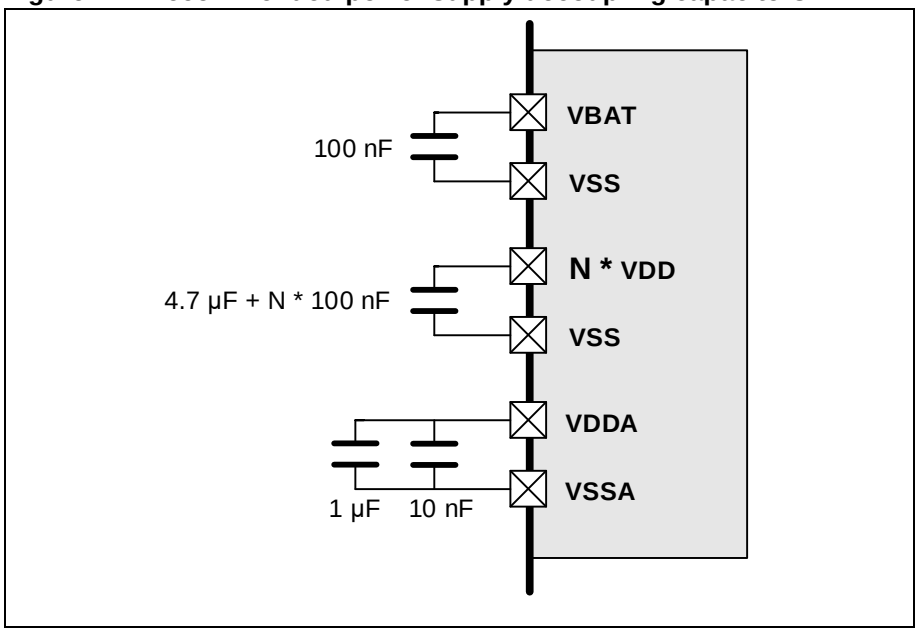

(1) All decoupling capacitors need to be as close as possible to the pins on the PCB board. More details refer to ***AN108 GD32F1x0 Hardware Development Guide***.

Table 4-3. Clock frequency(1)

Symbol	Parameter	Conditions	Min	Max	Unit
f_{HCLK1}	AHB1 clock frequency	—	—	48	MHz
f_{HCLK2}	AHB2 clock frequency	—	—	48	MHz
f_{APB1}	APB1 clock frequency	—	—	48	MHz
f_{APB2}	APB2 clock frequency	—	—	48	MHz

(1) Guaranteed by design, not tested in production.

Table 4-4. Operating conditions at Power up/ Power down(1)

Symbol	Parameter	Conditions	Min	Max	Unit
t_{VDD}	V_{DD} rise time rate	—	0	∞	µs/v
	V_{DD} fall time rate		20	∞	

(1) Guaranteed by design, not tested in production.

Table 4-5. Start-up timings of Operating conditions(1)(2)(3)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$t_{start-up}$	Start-up time	Code area in FLASH = 16 KB	7	9	11	ms
		Code area in FLASH = 32 KB	15	18	21	

(1) Guaranteed by design, not tested in production.

(2) After power-up, the start-up time is the time between the rising edge of NRST high and the main function.

(3) PLL is off.

Table 4-6. Power saving mode wakeup timings characteristics(1)

Symbol	Parameter	Min	Typ	Max	Unit
t_{Sleep}(2)	Wakeup from Sleep mode	—	3.3	—	µs
t_{Deep-}	Wakeup from Deep-sleep mode（LDO in run mode）	—	4.9	—	

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Parameter		Min	Typ	Max	Unit
$_{sleep}$(2)	Wakeup from Deep-sleep mode（LDO in low power mode）		—	4.9	—	
$t_{Standby}$(3)	Wakeup from Standby mode	Code area in FLASH = 16 KB	7	9	11	ms
		Code area in FLASH = 32 KB	15	18	21	

(1) The wakeup time is measured from the wakeup event to the point at which the application code reads the first instruction under the below conditions: V_{DD} = V_{DDA} = 3.3 V, IRC8M = System clock = 8 MHz

(2) Based on characterization, not tested in production.

(3) Guaranteed by design, not tested in production.

4.3. Power consumption

The power measurements specified in the tables represent that code with data executing from on-chip Flash with the following specifications.

Table 4-7.Power consumption characteristics(2)(3)(3)(4)(5)(6)

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
I_{DD} + I_{DDA}	Supply current (Run mode)	V_{DD}=V_{DDA}=3.3V, HXTAL=8MHz, System clock=48 MHz, All peripherals enabled	—	18.5	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System clock =48 MHz, All peripherals disabled	—	13.2	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System clock =36 MHz, All peripherals enabled	—	14.6	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System Clock =36 MHz, All peripherals disabled	—	10.5	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System clock =24 MHz, All peripherals enabled	—	10.3	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System Clock =24 MHz, All peripherals disabled	—	7.5	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System clock =16 MHz, All peripherals enabled	—	7.4	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System Clock =16 MHz, All peripherals disabled	—	5.6	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System clock =8 MHz, All peripherals enabled	-—	4.5	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, System Clock =8 MHz, All peripherals disabled	—	3.6	—	mA
	Supply current (Sleep mode)	V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =48 MHz, All peripherals enabled	—	11.6	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =48 MHz, All peripherals disabled	—	5.1	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =36 MHz, All peripherals enabled	—	9.1	—	mA

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =36 MHz, All peripherals disabled	—	4.2	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =24 MHz, All peripherals enabled	—	6.6	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =24 MHz, All peripherals disabled	—	3.4	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =16 MHz, All peripherals enabled	—	5.0	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =16 MHz, All peripherals disabled	—	2.8	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =8 MHz, All peripherals enabled	—	3.3	—	mA
		V_{DD}= V_{DDA} =3.3V, HXTAL=8MHz, CPU clock off, System clock =8 MHz, All peripherals disabled	—	2.2	—	mA
	Supply current (Deep-sleep mode)	V_{DD}= V_{DDA} =3.3V, Regulator in run mode, IRC40K off, RTC off	—	263	1100	µA
		V_{DD}= V_{DDA} =3.3V, Regulator in low power mode, IRC40K off, RTC off	—	255	—	µA
	Supply current (Standby mode)	V_{DD}= V_{DDA} =3.3V, LXTAL off, IRC40K on, RTC on	—	7.3	—	µA
		V_{DD}= V_{DDA} =3.3V, LXTAL off, IRC40K on, RTC off	—	6.8	—	µA
		V_{DD}= V_{DDA} =3.3V, LXTAL off, IRC40K off, RTC off	—	5.5	27.5	µA
IBAT	Battery supply current	V_{DD} and V_{DDA} not available, V_{BAT}=3.6 V, LXTAL on with external crystal, RTC on, LXTAL High driving	—	2.6	—	µA
		V_{DD} and V_{DDA} not available, V_{BAT}=3.3 V, LXTAL on with external crystal, RTC on, LXTAL High driving	—	2.4	—	µA
		V_{DD} and V_{DDA} not available, V_{BAT}=2.6 V, LXTAL on with external crystal, RTC on, LXTAL High driving	—	1.9	—	µA
		V_{DD} and V_{DDA} not available, V_{BAT}=1.8 V, LXTAL on with external crystal, RTC on, LXTAL High driving	—	1.3	—	µA
		V_{DD} and V_{DDA} not available, V_{BAT}=3.6 V,	—	2.6	—	µA

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		LXTAL on with external crystal, RTC on, LXTAL Medium High driving				
		V_{DD} and V_{DDA} not available, V_{BAT}=3.3 V, LXTAL on with external crystal, RTC on, LXTAL Medium High driving	—	2.3	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=2.6 V, LXTAL on with external crystal, RTC on, LXTAL Medium High driving	—	1.8	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=1.8 V, LXTAL on with external crystal, RTC on, LXTAL Medium High driving	—	1.3	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=3.6 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	—	1.5	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=3.3 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	—	1.4	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=2.6 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	—	1.2	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=1.8 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	—	1.0	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=3.6 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	—	1.4	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=3.3 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	—	1.3	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=2.6 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	—	1.1	—	μA
		V_{DD} and V_{DDA} not available, V_{BAT}=1.8 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	—	0.9	—	μA

(1) Based on characterization, not tested in production.
(2) Unless otherwise specified, all values given for T_A = 25 ℃ and test result is mean value.
(3) When System Clock is less than 4 MHz, an external source is used, and the HXTAL bypass function is needed, no PLL.
(4) When System Clock is greater than 8 MHz, a crystal 8 MHz is used, and the HXTAL bypass function is closed, using PLL.
(5) When analog peripheral blocks such as ADCs, HXTAL, LXTAL, IRC8M, or IRC40K are ON, an additional power consumption should be considered.
(6) All GPIOs are configured as analog mode except standby mode.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 4-2. Typical supply current consumption in Run mode


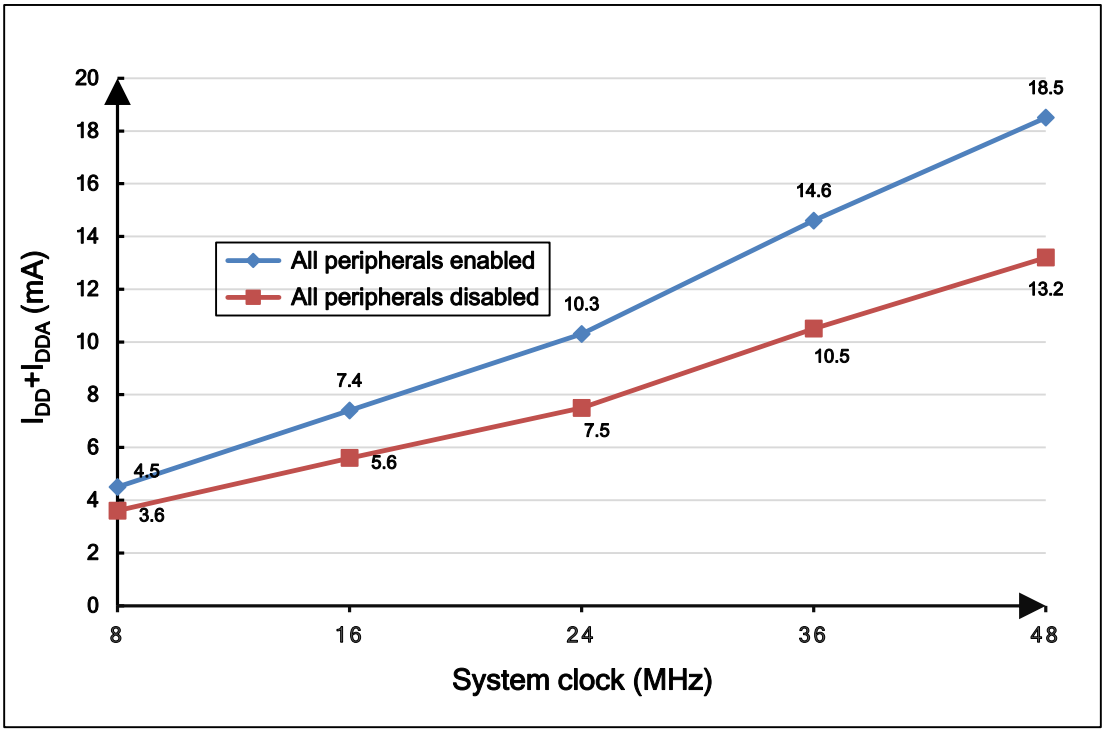


Figure 4-3. Typical supply current consumption in Sleep mode

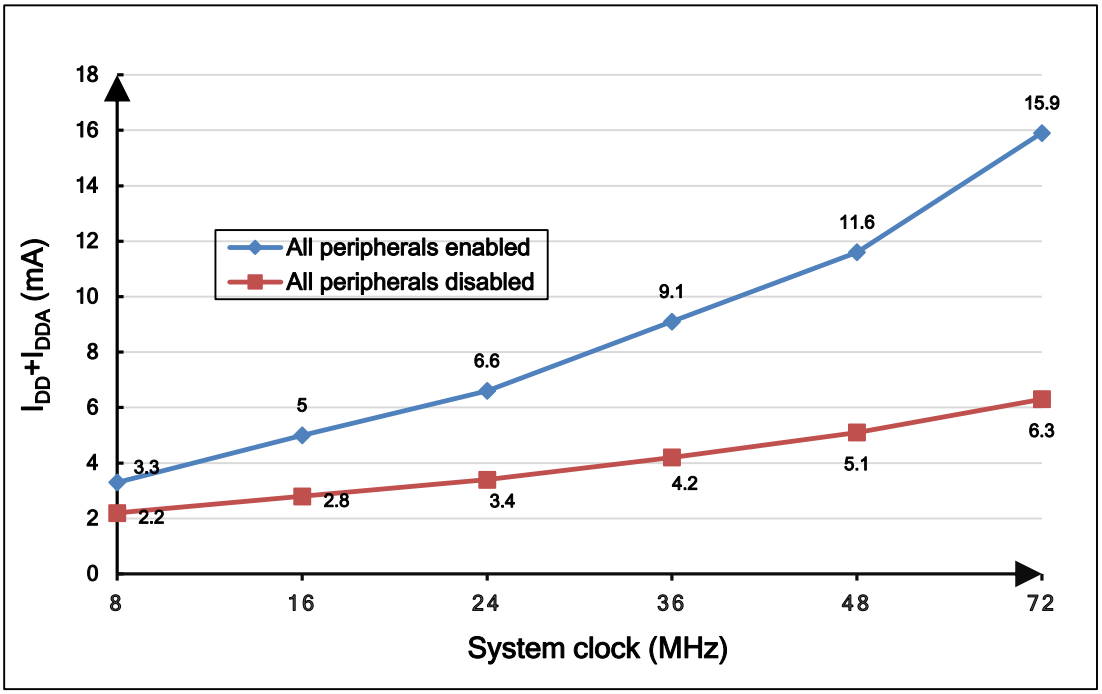

4.4. EMC characteristics

EMS (electromagnetic susceptibility) includes ESD (Electrostatic discharge, positive and negative) and FTB (Burst of Fast Transient voltage, positive and negative) testing result is

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

given in the ***Table 4-8. EMS characteristics,*** based on the EMS levels and classes compliant with IEC 61000 series standard.

Table 4-8. EMS characteristics(1)

Symbol	Parameter	Conditions	Level/Class
V_{ESD}	Voltage applied to all device pins to induce a functional disturbance	V_{DD} = 3.3 V, T_A = +25 °C conforms to IEC 61000-4-2	3B
V_{FTB}	Fast transient voltage burst applied to induce a functional disturbance through 100 pF on V_{DD} and V_{SS} pins	V_{DD} = 3.3 V, T_A = +25 °C conforms to IEC 61000-4-4	4A

(1) Based on characterization, not tested in production.

EMI (Electromagnetic Interference) emission test result is given in the ***Table 4-9. EMI characteristics***(1), The electromagnetic field emitted by the device are monitored while an application, executing EEMBC code, is running. The test is compliant with SAE J1752-3:2017 standard which specifies the test board and the pin loading.

Table 4-9. EMI characteristics(1)

Symbol	Parameter	Conditions	Tested frequency band	Max vs. [f_{HXTAL}/f_{HCLK}]	Unit
				8/48 MHz	
S_{EMI}	Peak level	V_{DD} = 3.6 V, T_A = +25 °C, LQFP64, f_{HCLK} = 48 MHz, conforms to SAE J1752-3:2017	0.15 to 30 MHz	9.83	dBµV
			30 to 130 MHz	9.00	
			130 MHz to 1GHz	14.64	

(1) Based on characterization, not tested in production.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4.5. Power supply supervisor characteristics

Table 4-10. Power supply supervisor characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{LVD}(1)	Low Voltage Detector Threshold	LVDT<2:0> = 000(rising edge)	—	2.123	—	V
		LVDT<2:0> = 000(falling edge)	—	2.019	—	V
		LVDT<2:0> = 001(rising edge)	—	2.213	—	V
		LVDT<2:0> = 001(falling edge)	—	2.181	—	V
		LVDT<2:0> = 010(rising edge)	—	2.31	—	V
		LVDT<2:0> = 010(falling edge)	—	2.194	—	V
		LVDT<2:0> = 011(rising edge)	—	2.404	—	V
		LVDT<2:0> = 011(falling edge)	—	2.304	—	V
		LVDT<2:0> = 100(rising edge)	—	2.505	—	V
		LVDT<2:0> = 100(falling edge)	—	2.382	—	V
		LVDT<2:0> = 101(rising edge)	—	2.604	—	V
		LVDT<2:0> = 101(falling edge)	—	2.498	—	V
		LVDT<2:0> = 110(rising edge)	—	2.702	—	V
		LVDT<2:0> = 110(falling edge)	—	2.59	—	V
		LVDT<2:0> = 111(rising edge)	—	2.803	—	V
		LVDT<2:0> = 111(falling edge)	—	2.684	—	V
$V_{LVDhyst}$(2)	LVD hysteresis	—	—	100	—	mV
V_{POR}(1)	Power on reset threshold	PDRVS = 0	—	2.4	—	V
V_{PDR}(1)	Power down reset threshold		—	2.35	—	V
$V_{PDRhyst}$(2)	PDR hysteresis		—	0.05	—	V
$t_{RSTTEMPO}$(2)	Reset temporization		—	2	—	ms
V_{POR}(1)	Power on reset threshold	PDRVS = 1	—	2.4	—	V
V_{PDR}(1)	Power down reset threshold		—	1.8	—	V
$V_{PDRhyst}$(2)	PDR hysteresis		—	0.6	—	V
$t_{RSTTEMPO}$(2)	Reset temporization		—	2	—	ms

(1) Based on characterization, not tested in production.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

(2) Guaranteed by design, not tested in production.

4.6. Electrical sensitivity

The device is strained in order to determine its performance in terms of electrical sensitivity. Electrostatic discharges (ESD) are applied directly to the pins of the sample. Static latch-up (LU) test is based on the two measurement methods.

Table 4-11. ESD characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{ESD(HBM)}$	Electrostatic discharge voltage (human body model)	T_A=25 °C; JS-001-2014	—	—	5000	V
$V_{ESD(CDM)}$	Electrostatic discharge voltage (charge device model)	T_A=25 °C; JS-002-2014	—	—	500	V

Table 4-12. Static latch-up characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
LU	I-test	T_A=25 °C; JESD78	—	—	±100	mA
	V_{supply} over voltage		—	—	5.4	V

4.7. External clock characteristics

Table 4-13. High speed crystal oscillator (HXTAL) generated from a crystal/ceramic characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{HXTAL}(1)	Crystal or ceramic frequency	V_{DD}=3.3V	4	8	32	MHz
R_F(2)	Feedback resistor	—	—	200	—	kΩ
C_{HXTAL}(2)(3)	Recommended matching capacitance on OSCIN and OSCOUT	—	—	20	30	pF
$Ducy_{(HXTAL)}$(2)	Crystal or ceramic duty cycle	—	30	50	70	%
g_m(2)	Oscillator transconductance	Startup	—	25	—	mA/V
$I_{DDHXTAL}$(1)	HXTAL oscillator operating current	V_{DD}=3.3V, T_A=25°C	—	1.1	—	mA
$t_{SUHXTAL}$(1)	HXTAL oscillator startup time	V_{DD}=3.3V, T_A=25°C	—	1.5	—	ms

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

(3) $C_{HXTAL1} = C_{HXTAL2} = 2*(C_{LOAD} - C_S)$, For C_{HXTAL1} and C_{HXTAL2}, it is recommended matching capacitance on OSCIN and OSCOUT. For C_{LOAD}, it is crystal/ceramic load capacitance, provided by the crystal or ceramic manufacturer. For C_S, it is PCB and MCU pin stray capacitance.

Table 4-14. High speed external clock characteristics (HXTAL in bypass mode)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{HXTAL_ext}(1)	External clock source or oscillator	V_{DD} = 3.3 V	1	—	50	MHz

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
	frequency					
V_{HXTALH}(2)	OSCIN input pin high level voltage	V_{DD} = 3.3 V	0.7 V_{DD}	—	V_{DD}	V
V_{HXTALL}(2)	OSCIN input pin low level voltage		V_{SS}	—	0.3 V_{DD}	V
$t_{H/L(HXTAL)}$(2)	OSCIN high or low time	—	5	—	—	ns
$t_{R/F(HXTAL)}$(2)	OSCIN rise or fall time	—	—	—	10	ns
C_{IN}(2)	OSCIN input capacitance	—	—	5	—	pF
$Ducy_{(HXTAL)}$(2)	Duty cycle	—	40	—	60	%

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

Table 4-15. Low speed external clock (LXTAL) generated from a crystal/ceramic characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{LXTAL}(1)	Low Speed crystal oscillator (LXTAL) frequency	V_{DD}= 3.3V	—	32.768	—	KHz
C_{LXTAL}(2)(3)	Recommended matching capacitance on OSC32IN and OSC32OUT	—	—	10	—	pF
$Ducy_{(LXTAL)}$(2)	Crystal or ceramic duty cycle	—	48	50	52	%
g_m(2)	Oscillator transconductance	Lower driving capability	—	4	—	µA/V
		Higher driving capability	—	18	—	
$I_{DDLXTAL}$(1)	LXTAL oscillator operating current	Lower driving capability	—	0.9	—	µA
		Higher driving capability	—	1.9	—	
$t_{SULXTAL}$(1)(4)	LXTAL oscillator startup time	Lower driving capability	—	1.36	—	s
		Higher driving capability	—	0.55	—	s

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

(3) C_{LXTAL1} = C_{LXTAL2} = 2*(C_{LOAD} - C_S), For C_{LXTAL1} and C_{LXTAL2}, it is recommended matching capacitance on OSC32IN and OSC32OUT. For C_{LOAD}, it is crystal/ceramic load capacitance, provided by the crystal or ceramic manufacturer. For C_S, it is PCB and MCU pin stray capacitance.

(4) $t_{SULXTAL}$ is the startup time measured from the moment it is enabled (by software) to the 32.768 kHz oscillator stabilization flags is SET. This value varies significantly with the crystal manufacturer.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 4-16. Low speed external user clock characteristics (LXTAL in bypass mode)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{LXTAL_ext}(1)	External clock source or oscillator frequency	V_{DD} = 3.3 V	—	32.768	1000	kHz
V_{LXTALH}(2)	OSC32IN input pin high level voltage	—	0.7 V_{DD}	—	V_{DD}	V
V_{LXTALL}(2)	OSC32IN input pin low level voltage	—	V_{SS}	—	0.3 V_{DD}	
$t_{H/L(LXTAL)}$ (2)	OSC32IN high or low time	—	450	—	—	ns
$t_{R/F(LXTAL)}$ (2)	OSC32IN rise or fall time	—	—	—	50	
C_{IN}(2)	OSC32IN input capacitance	—	—	5	—	pF
$Ducy_{(LXTAL)}$ (2)	Duty cycle	—	30	50	70	%

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.

4.8. Internal clock characteristics

Table 4-17. Internal 8 MHz RC oscillator (IRC8M) characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{IRC8M}	Internal 8 MHz RC oscillator (IRC8M) frequency	V_{DD}=V_{VDDA} =3.3V	—	8	—	MHz
ACC_{IRC8M}	IRC8M oscillator Frequency accuracy, Factory-trimmed	V_{DD}=V_{VDDA} =3.3V, T_A=-40°C ~+85°C	—	-1.7 ~1.4	—	%
		V_{DD}=V_{VDDA} =3.3V, T_A=25°C	-1	—	+1	%
	IRC8M oscillator Frequency accuracy, User trimming step(1)	—	—	0.5	—	%
$Ducy_{IRC8M}$(2)	IRC8M oscillator duty cycle	V_{DD}=V_{VDDA} =3.3V, f_{IRC8M}=8MHz	48	50	52	%
$I_{DDIRC8M}$ +$I_{DDAIRC8M}$ (1)	IRC8M oscillator operating current	V_{DD}=V_{VDDA} =3.3V, f_{IRC8M}=8MHz	—	39	100	μA
$t_{SUIRC8M}$(1)	IRC8M oscillator startup time	V_{DD}=V_{VDDA} =3.3V, f_{IRC8M}=8MHz	—	3.6	—	us

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.

Table 4-18. Internal 40KHz RC oscillator (IRC40K) characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{IRC40K}(1)	Internal 40KHz RC oscillator (IRC40K) frequency	V_{DD}=V_{VDDA}=3.3V, T_A=-40°C ~ +85°C	—	40	—	KHz
$I_{DDIRC40KI}$ +$I_{DDAIRC40KI}$(2)	IRC40K oscillator operating current	V_{DD}=V_{VDDA}=3.3V, T_A=25°C	—	1.3	—	μA
$t_{SUIRC40K}$(2)	IRC40K oscillator startup	V_{DD}=V_{CDDA}=3.3V, T_A=25°C	—	115.7	—	μs

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
	time					

(1) Guaranteed by design, not tested in production.
(2) Based on characterization, not tested in production.

Table 4-19. High speed internal clock (IRC14M) characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{IRC14M}	High Speed Internal Oscillator (IRC14M) frequency	V_{DD}=V_{DDA} =3.3V	—	14	—	MHz
ACC_{IRC14M}	IRC14M oscillator Frequency accuracy, Factory-trimmed	V_{DD}=V_{DDA} =3.3V, T_A=-40°C ~+85°C	—	-0.9~0.029	—	%
		V_{DD}=V_{CDDA} =3.3V, T_A=25°C	-1	—	+1	%
	IRC14M oscillator Frequency accuracy, User trimming step(1)	—	—	0.5	—	%
D_{IRC14M}(2)	IRC14M oscillator duty cycle	V_{DD}=V_{DDA} =3.3V, f_{IRC14M}=14MHz	48	50	52	%
$I_{DDIRC14M}$ +$I_{DDAIRC14M}$ (1)	IRC14M oscillator operating current	V_{DD}=V_{DDA} =3.3V, f_{IRC14M}=14MHz	—	54	—	μA
$t_{SUIRC14M}$(1)	IRC14M oscillator startup time	V_{DD}=V_{DDA} =3.3V, f_{IRC14M}=14MHz	—	2.9	—	us

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.

4.9. PLL characteristics

Table 4-20. PLL characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{PLLIN}(1)	PLL input clock frequency	—	1	—	25	MHz
f_{PLLOUT}(2)	PLL output clock frequency	—	16	—	72	MHz
f_{VCO}(2)	PLL VCO output clock frequency	—	—	—	72	MHz
t_{LOCK}(2)	PLL lock time	—	—	—	300	μs
I_{DDA}(1)	Current consumption on V_{DDA}	VCO freq = 48 MHz	—	270	—	μA
$Jitter_{PLL}$(1)(3)	Cycle to cycle Jitter（rms）	System clock	—	32.1	—	ps
	Cycle to cycle Jitter（peak to peak）		—	255.6	—	

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.
(3) Value given with main PLL running.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4.10. Memory characteristics

Table 4-21. Flash memory characteristics

Symbol	Parameter	Conditions	Min(1)	Typ(1)	Max(2)	Unit
PE_{CYC}	Number of guaranteed program /erase cycles before failure (Endurance)	T_A = -40 °C ~ +85 °C	100	—	—	kcycles
t_{RET}	Data retention time	—	—	20	—	years
t_{PROG}	Word programming time	T_A = -40°C ~ +85 °C	—	37.5	105	μ s
t_{ERASE}	Page erase time	T_A = -40°C ~ +85 °C	—	50	400	ms
$t_{MERASE(16K)}$(2)	Mass erase time	T_A = -40°C ~ +85 °C	—	0.3	3	s
$t_{MERASE(32K)}$(2)	Mass erase time	T_A = -40°C ~ +85 °C	—	0.6	6	s
$t_{MERASE(64K)}$(2)	Mass erase time	T_A = -40°C ~ +85 °C	—	1.2	12	s

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

4.11. NRST pin characteristics

Table 4-22. NRST pin characteristics


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IL(NRST)}$ (1)	NRST Input low level voltage	V_{DD} = V_{DDA} = 2.6 V	-0.3	—	0.3 V_{DD}	V
$V_{IH(NRST)}$ (1)	NRST Input high level voltage		0.7 V_{DD}	—	V_{DD} + 0.3	
V_{hyst}(2)	Schmidt trigger Voltage hysteresis		—	330	—	mV
$V_{IL(NRST)}$ (1)	NRST Input low level voltage	V_{DD} = V_{DDA} = 3.3 V	-0.3	—	0.3 V_{DD}	V
$V_{IH(NRST)}$ (1)	NRST Input high level voltage		0.7 V_{DD}	—	V_{DD} + 0.3	
V_{hyst}(2)	Schmidt trigger Voltage hysteresis		—	340	—	mV
$V_{IL(NRST)}$ (1)	NRST Input low level voltage	V_{DD} = V_{DDA} =3.6 V	-0.3	—	0.3 V_{DD}	V
$V_{IH(NRST)}$ (1)	NRST Input high level voltage		0.7 V_{DD}	—	V_{DD} + 0.3	
V_{hyst}(2)	Schmidt trigger Voltage hysteresis		—	350	—	mV
R_{pu}(2)	Pull-up equivalent resistor	—	—	40	—	kΩ

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 4-4. Recommended external NRST pin circuit(1)

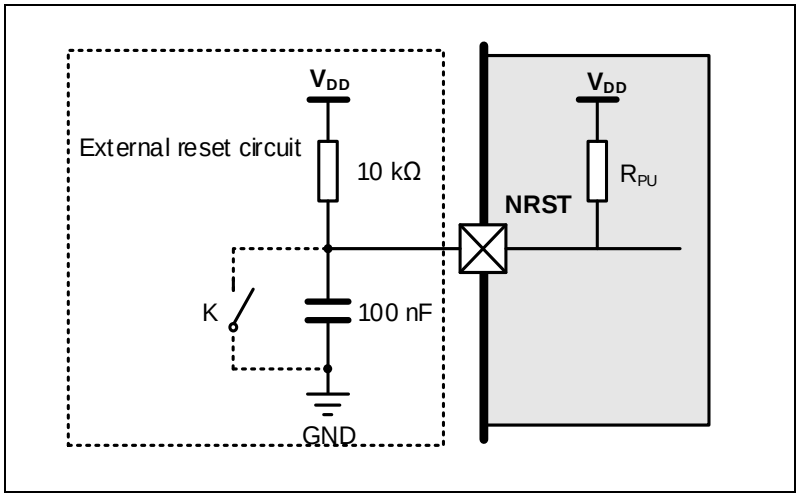

(1) Unless the voltage on NRST pin go below $V_{IL(NRST)}$ level, the device would not generate a reliable reset.

4.12. GPIO characteristics

Table 4-23. I/O port DC characteristics(1)(3)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{IL}	Standard IO Low level input voltage	2.6 V ≤ V_{DD} = V_{DDA} ≤ 3.3 V	—	—	0.3 V_{DD}	V
	5V-tolerant IO Low level input voltage	2.6 V ≤ V_{DD} = V_{DDA} ≤ 3.3 V	—	—	0.3 V_{DD}	
V_{IH}	Standard IO High level input voltage	2.6 V ≤ V_{DD} = V_{DDA} ≤ 3.3 V	0.7 V_{DD}	—	—	
	5 V-tolerant IO High level input voltage	2.6 V ≤ V_{DD} = V_{DDA} ≤ 3.3 V	0.7 V_{DD}	—	—	
IO_speed=50MHz						
V_{OL}	Low level output voltage for an IO Pin (I_{IO} = +8 mA)	V_{DD} = 2.6 V	—	0.24	—	V
		V_{DD} = 3.3 V	—	0.21	—	
		V_{DD} = 3.6 V	—	0.2	—	
	Low level output voltage for an IO Pin (I_{IO} = +20 mA)	V_{DD} = 2.6 V	—	0.66	—	
		V_{DD} = 3.3 V	—	0.56	—	
		V_{DD} = 3.6 V	—	0.54	—	
V_{OH}	High level output voltage for an IO Pin (I_{IO} = +8 mA)	V_{DD} = 2.6 V	—	2.25	—	
		V_{DD} = 3.3 V		2.94	—	
		V_{DD} = 3.6 V	—	3.23	—	
	(I_{IO} = +10 mA)	V_{DD} = 2.6 V	—	2.16	—	V
	High level output voltage for an IO Pin (I_{IO} = +20 mA)	V_{DD} = 3.3 V	—	2.36	—	
		V_{DD} = 3.6 V		2.83	—	
IO_speed=10MHz						
V_{OL}	Low level output	VDD = 2.6 V	—	0.35	—	V

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
	voltage for an IO Pin (I_{IO} = +4 mA)	V_{DD} = 3.3 V		0.29		
		V_{DD} = 3.6 V	—	0.28	—	
	Low level output voltage for an IO Pin (I_{IO} = +10 mA)	V_{DD} = 3.3 V	—	0.82	—	
		V_{DD} = 3.6 V	—	0.76	—	
V_{OH}	High level output voltage for an IO Pin (I_{IO} = +4 mA)	V_{DD} = 2.6 V	—	2.21	—	V
		V_{DD} = 3.3 V	—	2.96	—	
		V_{DD} = 3.6 V	—	3.28	—	
	High level output voltage for an IO Pin (I_{IO} = +10 mA)	V_{DD} = 3.3 V	—	2.49	—	
		V_{DD} = 3.6 V	—	2.85	—	
IO_speed=2MHz						
V_{OL}	Low level output voltage for an IO Pin (I_{IO} = +4 mA)	V_{DD} = 2.6 V	—	0.91	—	V
		V_{DD} = 3.3 V	—	0.72	—	
		V_{DD} = 3.6 V	—	0.69	—	
V_{OH}	High level output voltage for an IO Pin (I_{IO} = +4 mA)	V_{DD} = 2.6 V	—	1.75	—	
		V_{DD} = 3.3 V		2.70		
		V_{DD} = 3.6 V	—	3.04	—	
R_{PU}(2)	Internal pull-up resistor	V_{IN}=V_{SS}	—	40	—	kΩ
R_{PD}(2)	Internal pull-down resistor	V_{IN}=V_{DD}	—	40	—	kΩ

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.
(3) All pins except PC13 / PC14 / PC15. Since PC13 to PC15 are supplied through the Power Switch, which can only be obtained by a small current (typical source capability:3 mA shared between these IOs, but sink capability is same as other IO), the speed of GPIOs PC13 to PC15 should not exceed 2 MHz when they are in output mode(maximum load: 30 pF).

Table 4-24. I/O port AC characteristics(1)(2)(4

GPIOx_OSPDy[1:0] bit value(3)	Parameter	Conditions	Typ	Unit
GPIOx_OSPDy [1:0] = X0 （IO_Speed = 2 MHz）	T_{Rise}/T_{Fall}	2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 10 pF	65.2	ns
		2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 30 pF	55.4	
		2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 50 pF	45	
GPIOx_OSPDy [1:0] = 01 （IO_Speed = 10 MHz）	T_{Rise}/T_{Fall}	2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 10 pF	18.4	ns
		2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 30 pF	25.6	
		2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 50 pF	30.4	
GPIOx_OSPDy [1:0] = 11 （IO_Speed = 50 MHz）	T_{Rise}/T_{Fall}	2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 10 pF	2.6	ns
		2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 30 pF	3.4	
		2.6 ≤ V_{DD} ≤ 3.6 V, C_L = 50 pF	4.8	

(1) Based on characterization, not tested in production.
(2) Unless otherwise specified, all test results given for TA = 25 ℃.
(3) The I/O speed is configured using the GPIOx_CTL -> MDy[1:0] bits.
(4) Only for reference, Depending on user's design.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4.13. ADC characteristics

Table 4-25. ADC characteristics

V_{DDA}(1)	Operating voltage	—	2.6	3.3	3.6	V
V_{IN}(1)	ADC input voltage range	16 external; 3 internal	0	—	V_{DDA}	V
f_{ADC}(1)	ADC clock	—	0.6	—	14	MHz
f_S(1)	Sampling rate	12-bit	0.04	—	1	MSPS
R_{AIN}(2)	External input impedance	See ***Equation 1***	—	—	54.8	kΩ
R_{ADC}(2)	Input sampling switch resistance	—	—	—	0.2	kΩ
C_{ADC}(2)	Input sampling capacitance	No pin/pad capacitance included	—	32	—	pF
t_{CAL}(2)	Calibration time	f_{ADC} = 14 MHz	—	5.928	—	μs
t_s(2)	Sampling time	f_{ADC} = 14 MHz	0.11	—	17.11	μs
t_{CONV}(2)	Total conversion time(including sampling time)	12-bit	—	14	—	1/ f_{ADC}
t_{SU}(2)	Startup time	—	—	—	1	μs
V_{DDA}(1)	Operating voltage	—	2.6	3.3	3.6	V
V_{IN}(1)	ADC input voltage range	16 external; 3 internal	0	—	V_{DDA}	V

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

Equation 1: R_{AIN} max formula $$R_{AIN} < \frac{T_s}{f_{ADC} * C_{ADC} * \ln(2^{N+2})} - R_{ADC}$$

The formula above (Equation 1) is used to determine the maximum external impedance allowed for an error below 1/4 of LSB. Here N=12 (from 12-bit resolution).

Table 4-26. ADC $R_{AIN\ max}$ for f_{ADC} =14 MHz

T_s (cycles)	t_s (μs)	$R_{AIN\ max}$ (kΩ)
1.5	0.11	0.14
7.5	0.54	1.5
13.5	0.96	2.9
28.5	2.04	6.3
41.5	2.96	9.3
55.5	3.96	12.5
71.5	5.11	16.2
239.5	17.11	54.8

4.14. Temperature sensor characteristics

Table 4-27. Temperature sensor characteristics(1)

Symbol	Parameter	Min	Typ	Max	Unit
T_L	V_{SENSE} linearity with temperature	—	±1.5	—	℃

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Avg_Slope	Average slope	—	4.1	—	mV/℃
V_{25}	Voltage at 25 °C	—	1.45	—	V
t_{S_temp} (2)	ADC sampling time when reading the temperature	—	17.1	—	μs

(1) Based on characterization, not tested in production.

(2) Shortest sampling time can be determined in the application by multiple iterations.

4.15. I2C characteristics

Table 4-28. I2C characteristics (1) (2) (3)


Symbol	Parameter	Conditions	Standard mode		Fast mode		Unit
			Min	Max	Min	Max	
$t_{SCL(H)}$	SCL clock high time	—	4.0	—	0.6	—	μs
$t_{SCL(L)}$	SCL clock low time	—	4.7	—	1.3	—	μs
$t_{SU(SDA)}$	SDA setup time	—	250	—	100	—	ns
$t_{H(SDA)}$	SDA data hold time	—	0(3)	3450	0	900	ns
$t_{R(SDA/SCL)}$	SDA and SCL rise time	—	—	1000	—	300	ns
$t_{F(SDA/SCL)}$	SDA and SCL fall time	—	—	300	—	300	ns
$t_{H(STA)}$	Start condition hold time	—	4.0	—	0.6	—	μs
$t_{SU(STA)}$	Repeated Start condition setup time	—	4.7	—	0.6	—	μs
$t_{SU(STO)}$	Stop condition setup time	—	4.0	—	0.6	—	μs
t_{BUFF}	Stop to Start condition time (bus free)	—	4.7	—	1.3	—	μs

(1) Guaranteed by design, not tested in production.

(2) To ensure the standard mode I2C frequency, f_{PCLK1} must be at least 2 MHz. To ensure the fast mode I2C frequency, f_{PCLK1} must be at least 4 MHz.

(3) The device should provide a data hold time of 300 ns at least in order to bridge the undefined region of the falling edge of SCL.

Figure 4-5. I2C bus timing diagram

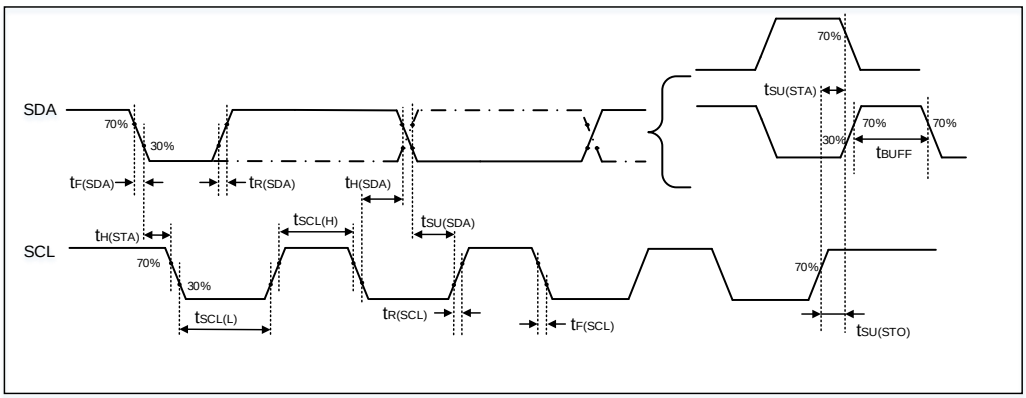

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4.16. USART characteristics

Table 4-29. USART characteristics (1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{SCK}	SCK clock frequency	f_{PCLKx} = 48 MHz	—	—	24	MHz
$t_{SCK(H)}$	SCK clock high time	f_{PCLKx} = 48MHz	20.83	—	—	ns
$t_{SCK(L)}$	SCK clock low time	f_{PCLKx} = 48 MHz	20.83	—	—	ns

(1) Based on characterization, not tested in production.

4.17. TIMER characteristics

Table 4-30. TIMER characteristics (1)

Symbol	Parameter	Conditions	Min	Max	Unit
t_{res}	Timer resolution time	—	1	—	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 48 MHz	20.8	—	ns
f_{EXT}	Timer external clock frequency	—	0	$f_{TIMERxCLK}/2$	MHz
		$f_{TIMERxCLK}$ = 48 MHz	0	24	MHz
RES	Timer resolution	—	—	16	bit
$t_{COUNTER}$	16-bit counter clock period when internal clock is selected	—	1	65536	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 48 MHz	0.0208	1365	μs
t_{MAX_COUNT}	Maximum possible count	—	—	65536 × 65536	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 48 MHz	—	89.5	s

(1) Guaranteed by design, not tested in production.

4.18. WDGT characteristics

Table 4-31. FWDGT min/max timeout period at 40 kHz (IRC40K) (1)

Prescaler divider	PR[2:0] bits	Min timeout RLD[11:0] = 0x000	Max timeout RLD[11:0] = 0xFFF	Unit
1/4	000	0.025	409.525	ms
1/8	001	0.025	819.025	
1/16	010	0.025	1638.025	
1/32	011	0.025	3276.025	
1/64	100	0.025	6552.025	
1/128	101	0.025	13104.025	
1/256	110 or 111	0.025	26208.025	

(1) Guaranteed by design, not tested in production.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 4-32. WWDGT min-max timeout value at 48 MHz (f_{PCLK1}) (1)

Prescaler divider	PSC[1:0]	Min timeout value CNT[6:0] = 0x40	Unit	Max timeout value CNT[6:0] = 0x7F	Unit
1/1	00	85.33	μs	5.46	ms
1/2	01	170.67		10.92	
1/4	10	341.33		21.85	
1/8	11	682.67		43.69	

(1) Guaranteed by design, not tested in production.

4.19. Parameter conditions

Unless otherwise specified, all values given for V_{DD} = V_{DDA} = 3.3 V, T_A = 25 °C.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5. Package information

5.1. LQFP64 package outline dimensions

Figure 5-1. LQFP64 package outline

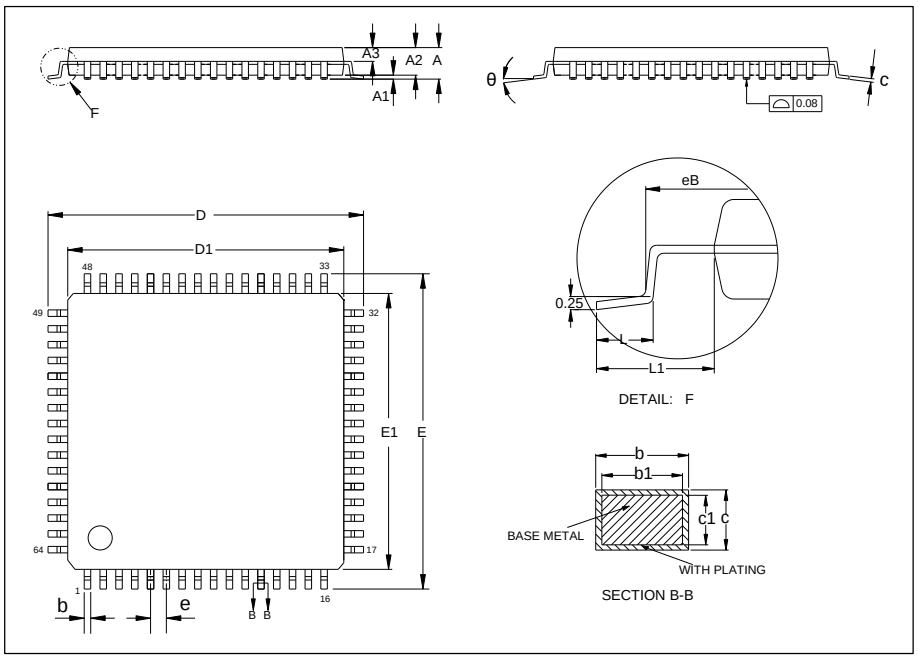



Table 5-1. LQFP64 package dimensions

Symbol	Min	Typ	Max
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	—	0.26
b1	0.17	0.20	0.23
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	11.80	12.00	12.20
D1	9.90	10.00	10.10
E	11.80	12.00	12.20
E1	9.90	10.00	10.10
e	—	0.50	—
eB	11.25	—	11.45
L	0.45	—	0.75
L1	—	1.00	—
θ	0°	—	7°

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 5-2. LQFP64 recommended footprint

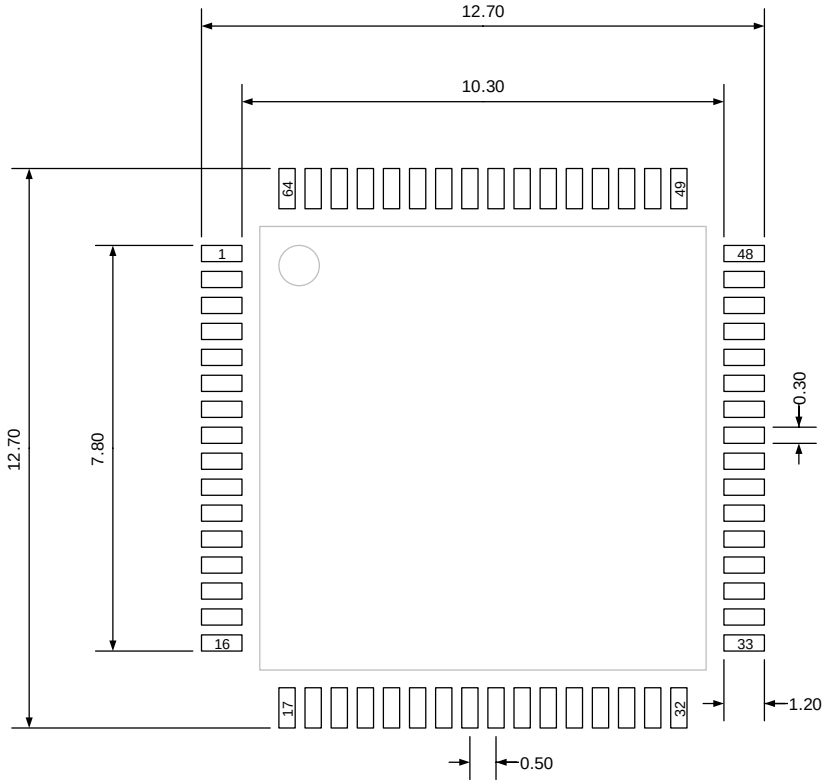

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.2. LQFP48 package outline dimensions

Figure 5-3. LQFP48 package outline

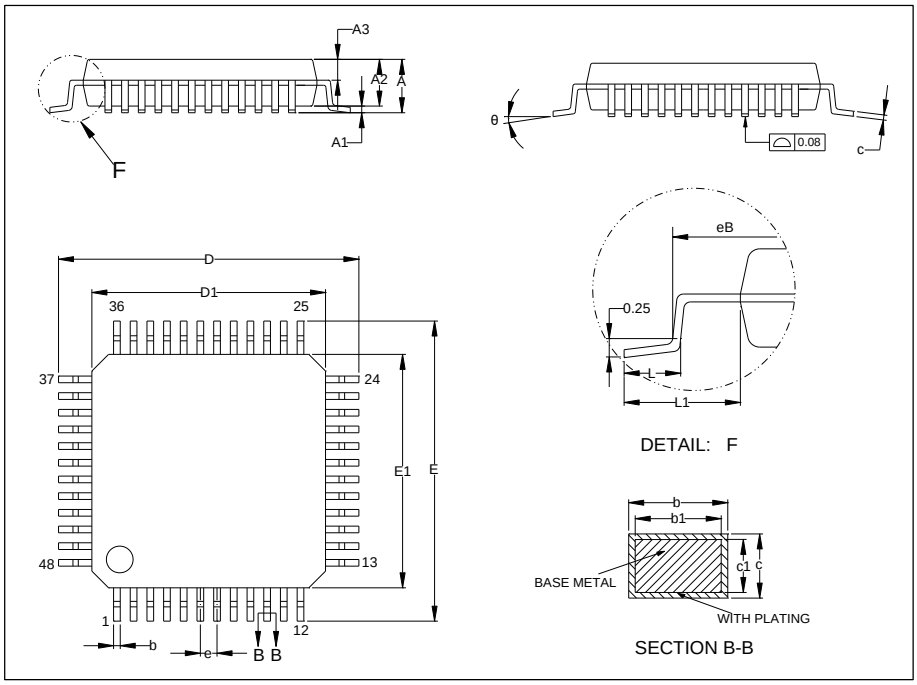



Table 5-2. LQFP48 package dimensions

Symbol	Min	Typ	Max
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	—	0.26
b1	0.17	0.20	0.23
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	8.80	9.00	9.20
D1	6.90	7.00	7.10
E	8.80	9.00	9.20
E1	6.90	7.00	7.10
e	—	0.50	—
eB	8.10	—	8.25
L	0.45	—	0.75
L1	—	1.00	—
θ	0°	—	7°

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 5-4. LQFP48 recommended footprint

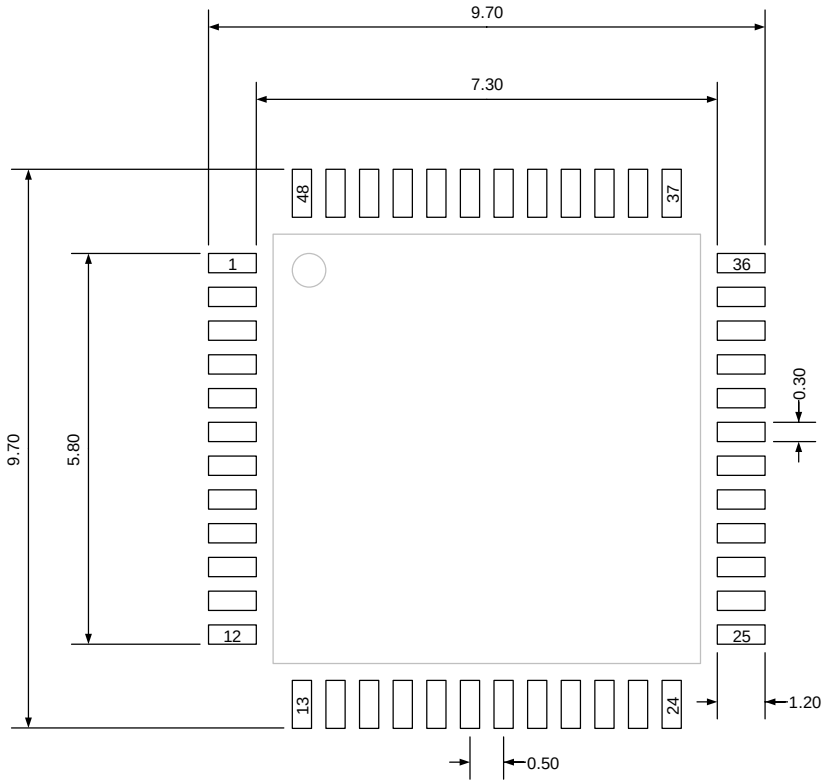

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.3. LQFP32 package outline dimensions

Figure 5-5. LQFP32 package outline

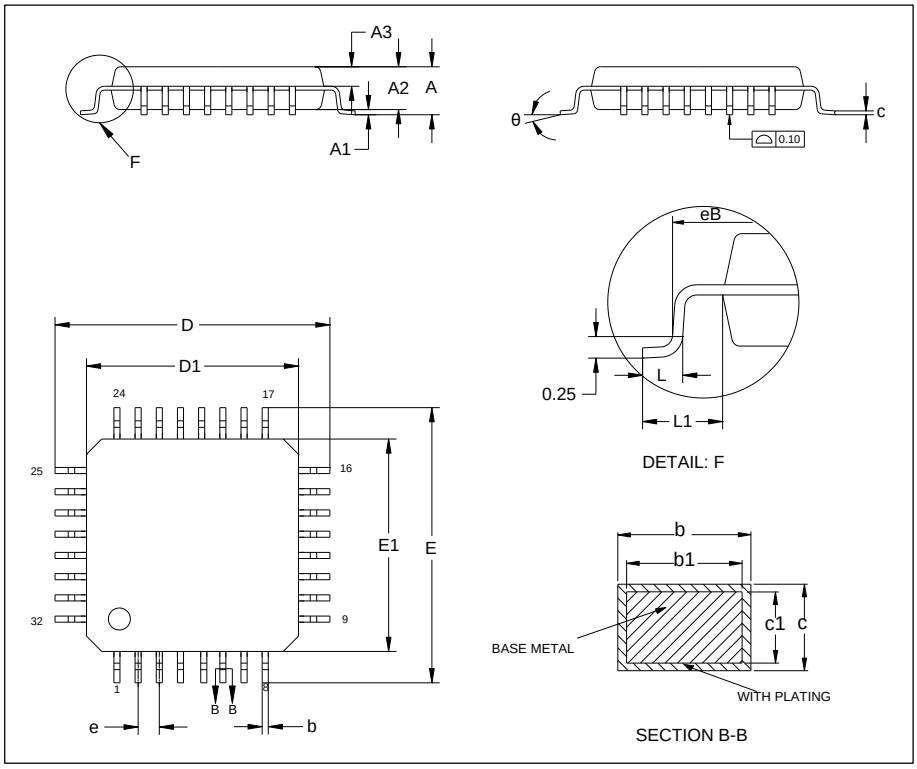



Table 5-3. LQFP32 package dimensions

Symbol	Min	Typ	Max
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.33	—	0.41
b1	0.32	0.35	0.38
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	8.80	9.00	9.20
D1	6.90	7.00	7.10
E	8.80	9.00	9.20
E1	6.90	7.00	7.10
e	—	0.80	—
eB	8.10	—	8.25
L	0.45	—	0.75
L1	—	1.00	—
θ	0°	—	7°

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 5-6. LQFP32 recommended footprint

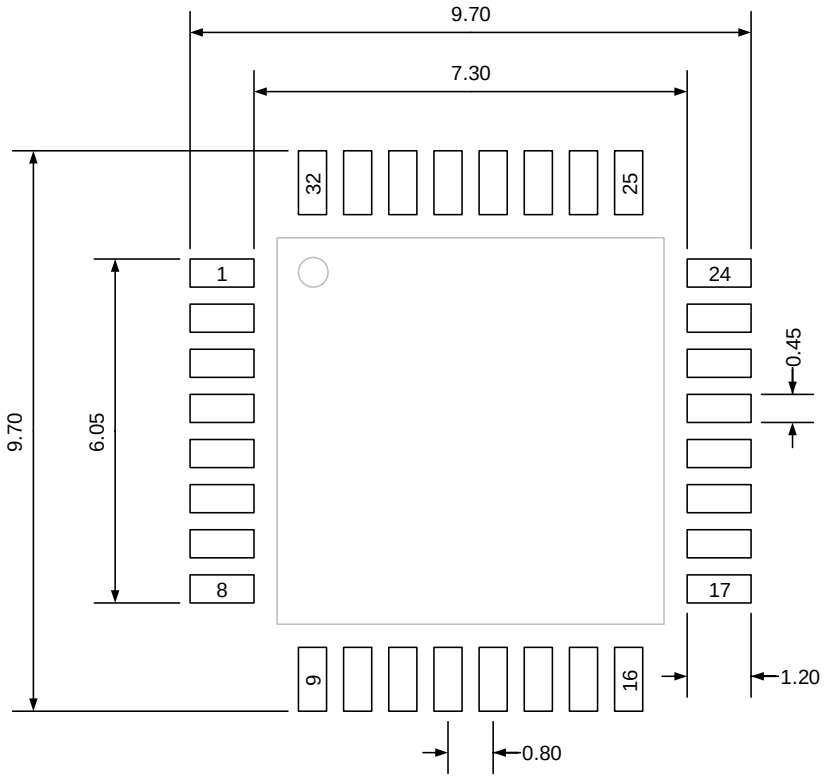

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.4. QFN32 package outline dimensions

Figure 5-7. QFN32 package outline

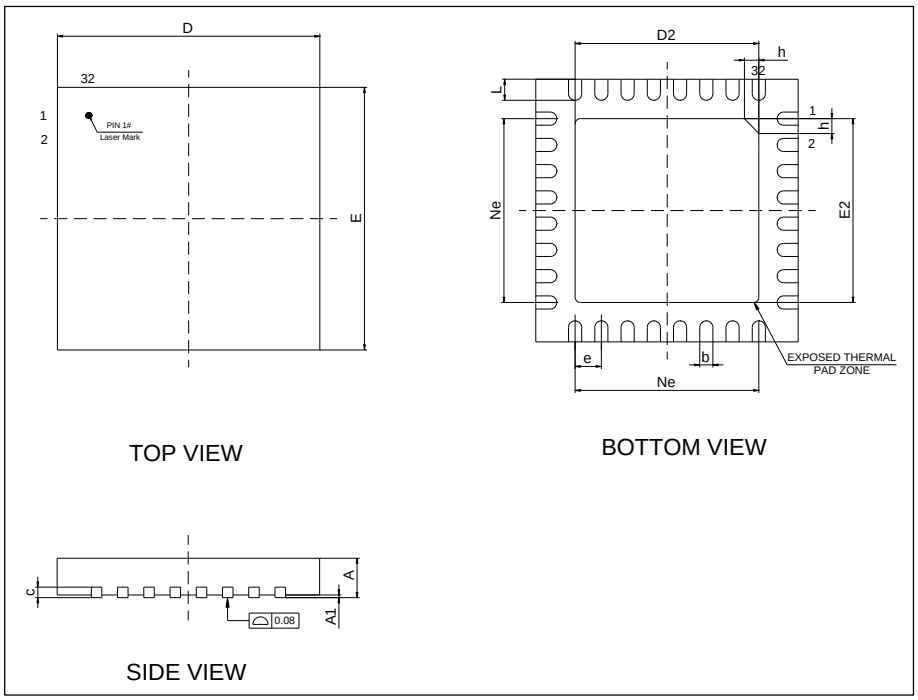



Table 5-4. QFN32 package dimensions

Symbol	Min	Typ	Max
A	0.70	0.75	0.80
A1	0	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	4.90	5.00	5.10
D2	3.40	3.50	3.60
E	4.90	5.00	5.10
E2	3.40	3.50	3.60
e	—	0.50	—
h	0.30	0.35	0.40
L	0.35	0.40	0.45
Ne	—	3.50	—

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 5-8. QFN32 recommended footprint

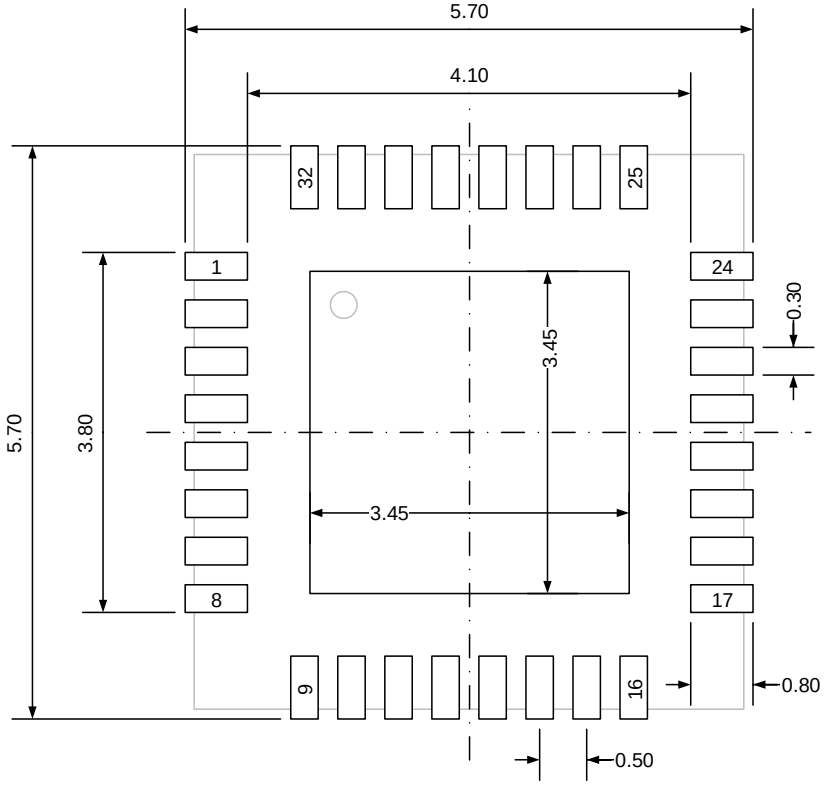

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.5. QFN28 package outline dimensions

Figure 5-9. QFN28 package outline

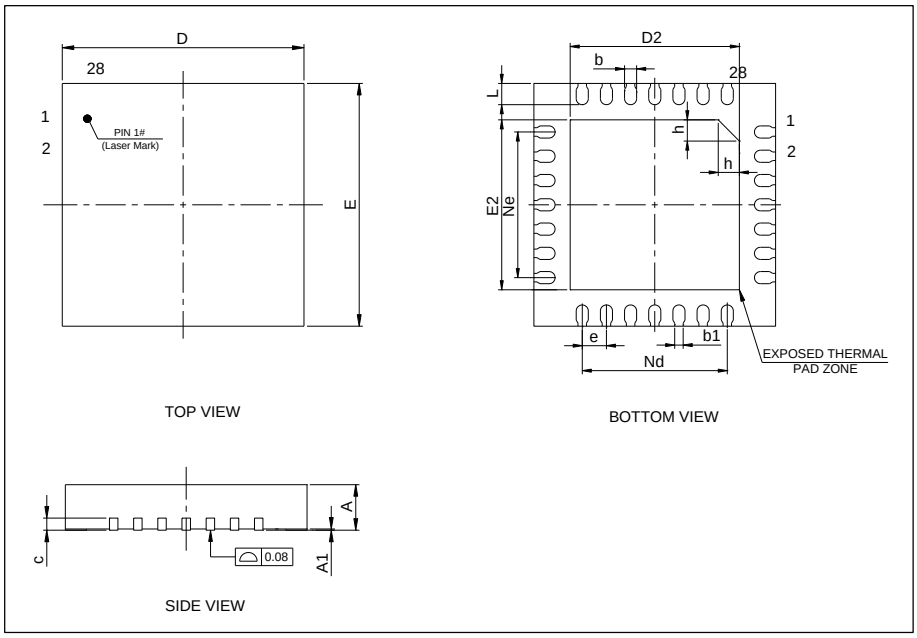



Table 5-5. QFN28 package dimensions

Symbol	Min	Typ	Max
A	0.70	0.75	0.80
A1	0	0.02	0.05
b	0.15	0.20	0.25
b1	—	0.14	—
c	0.18	0.20	0.25
D	3.90	4.00	4.10
D2	2.70	2.80	2.90
E	3.90	4.00	4.10
E2	2.70	2.80	2.90
e	—	0.40	—
h	0.30	0.35	0.40
L	0.30	0.35	0.40
Nd	—	2.40	—
Ne	—	2.40	—

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 5-10. QFN28 recommended footprint

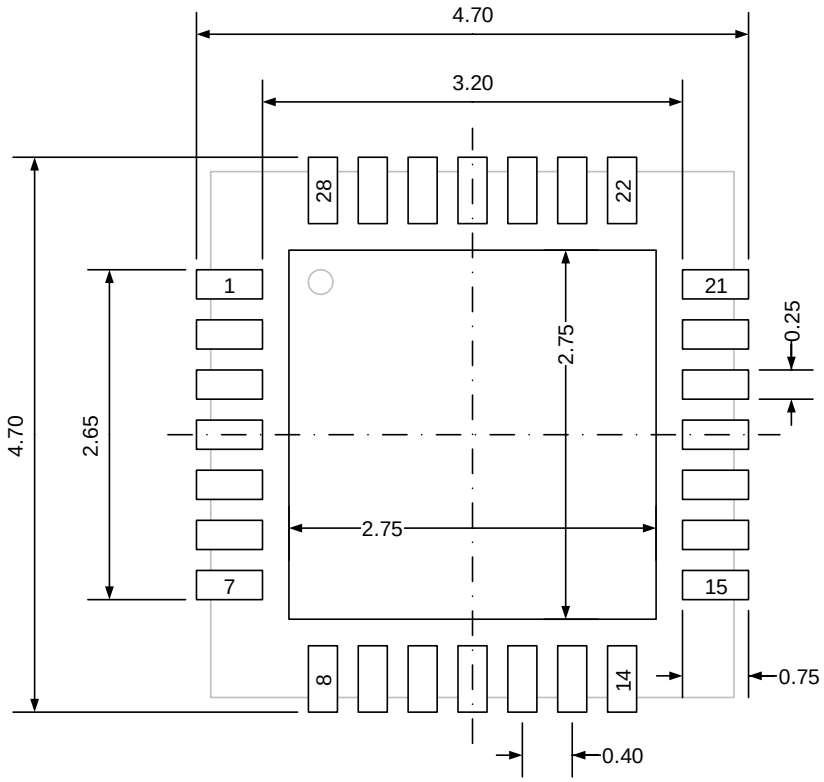

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.6. TSSOP20 package outline dimensions

Figure 5-11. TSSOP20 package outline

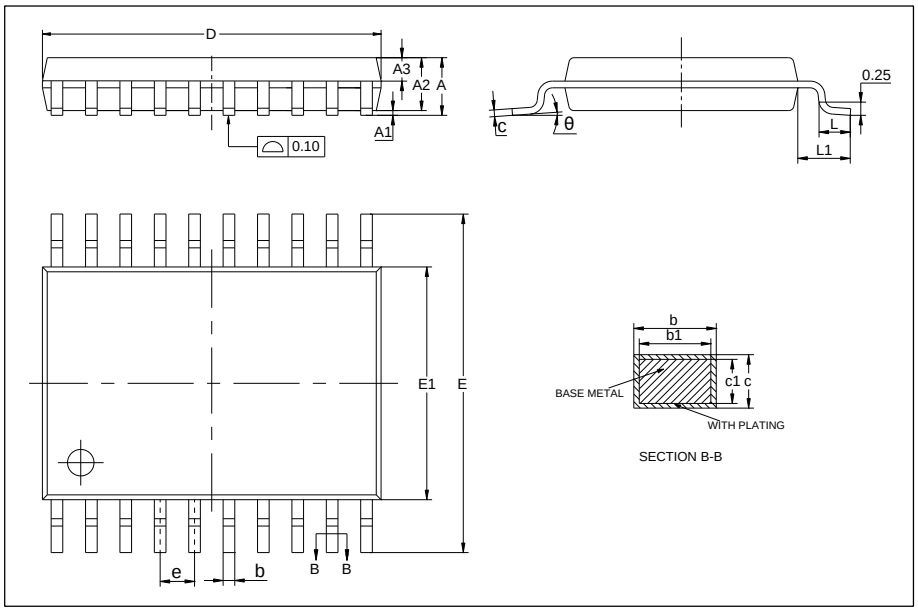



Table 5-6. TSSOP20 package dimensions

Symbol	Min	Typ	Max
A	—	—	1.20
A1	0.05	—	0.15
A2	0.80	1.00	1.05
A3	0.39	0.44	0.49
b	0.20	—	0.28
b1	0.19	0.22	0.25
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	6.40	6.50	6.60
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	—	0.65	—
L	0.45	0.60	0.75
L1	—	1.00	—
θ	0°	—	8°

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 5-12. TSSOP20 recommended footprint

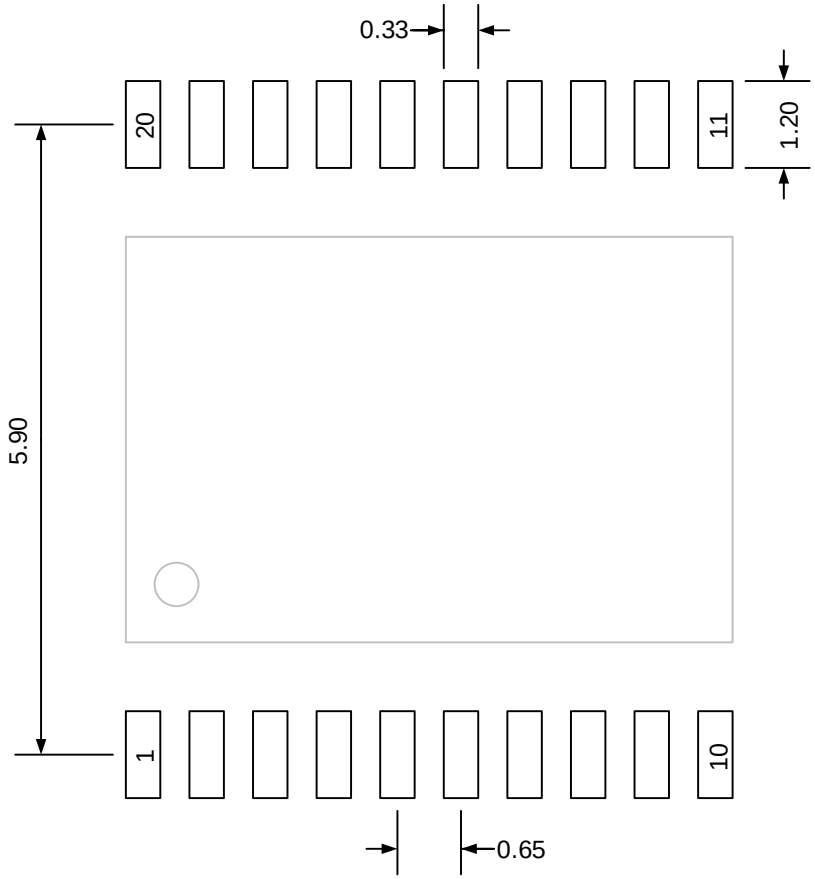

(Original dimensions are in millimeters)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5.7. Thermal characteristics

Thermal resistance is used to characterize the thermal performance of the package device, which is represented by the Greek letter "θ". For semiconductor devices, thermal resistance represents the steady-state temperature rise of the chip junction due to the heat dissipated on the chip surface.

θ_{JA}: Thermal resistance, junction-to-ambient.

θ_{JB}: Thermal resistance, junction-to-board.

θ_{JC}: Thermal resistance, junction-to-case.

Ψ_{JB}: Thermal characterization parameter, junction-to-board.

Ψ_{JT}: Thermal characterization parameter, junction-to-top center.

$$\theta_{JA}=(T_J-T_A)/P_D \quad (5\text{-}1)$$

$$\theta_{JB}=(T_J-T_B)/P_D \quad (5\text{-}2)$$

$$\theta_{JC}=(T_J-T_C)/P_D \quad (5\text{-}3)$$

Where, T_J = Junction temperature.

T_A = Ambient temperature

T_B = Board temperature

T_C = Case temperature which is monitoring on package surface

P_D = Total power dissipation

θ_{JA} represents the resistance of the heat flows from the heating junction to ambient air. It is an indicator of package heat dissipation capability. Lower θ_{JA} can be considerate as better overall thermal performance. θ_{JA} is generally used to estimate junction temperature.

θ_{JB} is used to measure the heat flow resistance between the chip surface and the PCB board.

θ_{JC} represents the thermal resistance between the chip surface and the package top case. θ_{JC} is mainly used to estimate the heat dissipation of the system (using heat sink or other heat dissipation methods outside the device package).

Table 5-7. Package thermal characteristics(1)

Symbol	Condition	Package	Value	Unit
θ_{JA}	Natural convection, 2S2P PCB	LQFP64	63.57	°C/W
		LQFP48	64.40	
		LQFP32	66.11	
		QFN32	48.50	
		QFN28	66.07	
		TSSOP20	83.01	
θ_{JB}	Cold plate, 2S2P PCB	LQFP64	44.40	°C/W

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Symbol	Condition	Package	Value	Unit
		LQFP48	42.32	
		LQFP32	42.66	
		QFN32	28.32	
		QFN28	32.52	
		TSSOP20	—	
θ_{JC}	Cold plate, 2S2P PCB	LQFP64	21.98	°C/W
		LQFP48	22.47	
		LQFP32	30.06	
		QFN32	24.07	
		QFN28	30.58	
		TSSOP20	22.92	
Ψ_{JB}	Natural convection, 2S2P PCB	LQFP64	44.64	°C/W
		LQFP48	42.42	
		LQFP32	43.18	
		QFN32	28.93	
		QFN28	32.55	
		TSSOP20	—	
Ψ_{JT}	Natural convection, 2S2P PCB	LQFP64	1.51	°C/W
		LQFP48	1.74	
		LQFP32	4.56	
		QFN32	3.33	
		QFN28	3.27	
		TSSOP20	—	

(1) Thermal characteristics are based on simulation, and meet JEDEC specification.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6. Ordering information

Table 6-1. Part ordering code for GD32F130xx devices

Ordering code	Flash (KB)	Package	Package type	Temperature operating range
GD32F130R8T6	64	LQFP64	Green	Industrial -40°C to +85°C
GD32F130C8T6	64	LQFP48	Green	Industrial -40°C to +85°C
GD32F130C6T6	32	LQFP48	Green	Industrial -40°C to +85°C
GD32F130C4T6	16	LQFP48	Green	Industrial -40°C to +85°C
GD32F130K8T6	64	LQFP32	Green	Industrial -40°C to +85°C
GD32F130K6T6	32	LQFP32	Green	Industrial -40°C to +85°C
GD32F130K4T6	16	LQFP32	Green	Industrial -40°C to +85°C
GD32F130K8U6	64	QFN32	Green	Industrial -40°C to +85°C
GD32F130K6U6	32	QFN32	Green	Industrial -40°C to +85°C
GD32F130K4U6	16	QFN32	Green	Industrial -40°C to +85°C
GD32F130G8U6TR	64	QFN28	Green	Industrial -40°C to +85°C
GD32F130G6U6TR	32	QFN28	Green	Industrial -40°C to +85°C
GD32F130G4U6TR	16	QFN28	Green	Industrial -40°C to +85°C
GD32F130F8P6TR	64	TSSOP20	Green	Industrial -40°C to +85°C
GD32F130F6P6TR	32	TSSOP20	Green	Industrial -40°C to +85°C
GD32F130F4P6TR	16	TSSOP20	Green	Industrial -40°C to +85°C

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7. Revision history

Table 7-1. Revision history

Revision No.	Description	Date
1.0	1. Initial Release.	Mar.8, 2014
1.1	1. Characteristics values updated in ***Table 4-3. Power consumption characteristics***.	Oct.20, 2014
2.0	1. Characteristics of QFN32 package added in ***Table 2-3. GD32F130R8 LQFP64 pin definitions*** and ***Table 5-2. QFN package dimensions***.	Jan 15, 2015
2.1	1. Characteristics of TSSOP20 package added in ***Table 2-1. GD32F130xx devices features and peripheral list***.	Apr 24, 2016
3.0	1. Adapt To New Name Convention.	Jan.24, 2018
3.1	1. Add LQFP32 Package.	Apr.24, 2018
3.2	1. Modify 72MHz system frequency to 42MHz.	Jul.25, 2019
3.3	1. Modify formats and descriptions.	Nov.21, 2019
3.4	1. Update ***Table 2-1. GD32F130xx devices features and peripheral list*** and ***Figure 2-4. GD32F130Kx LQFP32 pinouts.*** 2. Update ***Table 4-3. Power consumption characteristics***.	Jun.16.2021
3.5	1. Update ***Table 4-1. Absolute maximum ratings(1)(4)***. 2. Modify USART maximum communication speed from 9M to 6M. 3. Update electrical parameters in chapter ***Electrical characteristics***.	Jul. 12. 2022
3.6	1. Add notes for ***Table 4-2. DC operating conditions*** and ***Table 4-7. Power consumption characteristics(2)(3)(4)(5)(6)***, and update ***Table 4-7. Power consumption characteristics(2)(3)(4)(5)(6)***. 2. Update ***Figure 4-5. I2C bus timing diagram***.	Sep. 27, 2022
3.7	1. Add the TR suffix after the Ordering information TSSOP20, QFN28	Mar. 13, 2023
3.8	1. Add notes :more details refer to AN108 GD32F3x0 Hardware Development Guide. 2. Add the pin definitions format requires that a new line be added to the pin definitions.	Jun15. 2023
3.9	1. Add specific ability description to backup domain IO driver current. 2. Convert all encapsulated POD plots to vector plots.	Dec.31, 2023
4.0	1. All pods add coplanarity information.	Jun.30, 2024
4.1	1. An error in the selection of USART K8; modify K8 to 2 units	Dec.30, 2024
4.2	1. Modify the startup time and standby wake-up time	Aug.8, 2025

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

	parameters in the electrical parameters.	

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Important Notice

This document is the property of GigaDevice Semiconductor Inc. and its subsidiaries (the "Company"). This document, including any product of the Company described in this document (the “Product”), is owned by the Company according to the laws of the People’s Republic of China and other applicable laws. The Company reserves all rights under such laws and no Intellectual Property Rights are transferred (either wholly or partially) or licensed by the Company (either expressly or impliedly) herein. The names and brands of third party referred thereto (if any) are the property of their respective owner and referred to for identification purposes only.

To the maximum extent permitted by applicable law, the Company makes no representations or warranties of any kind, express or implied, with regard to the merchantability and the fitness for a particular purpose of the Product, nor does the Company assume any liability arising out of the application or use of any Product. Any information provided in this document is provided only for reference purposes. It is the sole responsibility of the user of this document to determine whether the Product is suitable and fit for its applications and products planned, and properly design, program, and test the functionality and safety of its applications and products planned using the Product. The Product is designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and the Product is not designed or intended for use in (i) safety critical applications such as weapons systems, nuclear facilities, atomic energy controller, combustion controller, aeronautic or aerospace applications, traffic signal instruments, pollution control or hazardous substance management; (ii) life-support systems, other medical equipment or systems (including life support equipment and surgical implants); (iii) automotive applications or environments, including but not limited to applications for active and passive safety of automobiles (regardless of front market or aftermarket), for example, EPS, braking, ADAS (camera/fusion), EMS, TCU, BMS, BSG, TPMS, Airbag, Suspension, DMS, ICMS, Domain, ESC, DCDC, e-clutch, advanced-lighting, etc.. Automobile herein means a vehicle propelled by a self-contained motor, engine or the like, such as, without limitation, cars, trucks, motorcycles, electric cars, and other transportation devices; and/or (iv) other uses where the failure of the device or the Product can reasonably be expected to result in personal injury, death, or severe property or environmental damage (collectively "Unintended Uses"). Customers shall take any and all actions to ensure the Product meets the applicable laws and regulations. The Company is not liable for, in whole or in part, and customers shall hereby release the Company as well as its suppliers and/or distributors from, any claim, damage, or other liability arising from or related to all Unintended Uses of the Product. Customers shall indemnify and hold the Company, and its officers, employees, subsidiaries, affiliates as well as its suppliers and/or distributors harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of the Product.

Information in this document is provided solely in connection with the Product. The Company reserves the right to make changes, corrections, modifications or improvements to this document and the Product described herein at any time without notice. The Company shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 GigaDevice Semiconductor Inc. – All rights reserved

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com