
ST485B
ST485C


Low power RS-485/RS-422 transceiver

Features

- Low quiescent current: 300 µA
- Designed for RS-485 interface application
- - 7 V to 12 V common mode input voltage range
- Driver maintains high impedance in 3-state or with the power OFF
- 70 mV typical input hysteresis
- 30 ns propagation delay, 5 ns skew
- Operate from a single 5 V supply
- Current limiting and thermal shutdown for driver overload protection
- Allows up to 64 transceivers on the bus



DIP-8



SO-8

The ST485 is available in three temperature range: commercial (0 °C to 70 °C), industrial (- 40 °C to 85 °C) and automotive (- 55 °C to 125 °C).

Description

The ST485 is al low power transceiver for RS-485 and RS-422 communication. Each part contains one driver and one receiver.

This transceiver draw 300 µA (typ.) of supply current when unloaded or fully loaded with disabled drivers.

It operates from a single 5 V supply.

Driver is short-circuit current limited and is protected against excessive power dissipation by thermal shutdown circuitry that placed the driver outputs into a high-impedance state.

The ST485 is designed for bi-directional data communications on multipoint bus transmission line (half-duplex applications).

Table 1. Device summary

Order code	Temperature range	Package	Packaging
ST485CN	0 to 70 °C	DIP-8	50 parts per tube / 40 tube per box
ST485BN	- 40 to 85 °C	DIP-8	50 parts per tube / 40 tube per box
ST485CDR	0 to 70 °C	SO-8 (tape and reel)	2500 parts per reel
ST485BDR	- 40 to 85 °C	SO-8 (tape and reel)	2500 parts per reel

深圳市满度科技有限公司
Web:www.manduic.com
微信扫码咨询客服
Tel:150-1290-5940
Email:sales@manduic.com

Contents

1 **Pin configuration 3**
1.1 Pin description 3

2 **Truth tables 4**

3 **Maximum ratings 5**

4 **Electrical characteristics 6**
4.1 Driver switching characteristics 7
4.2 Receiver switching characteristics 8

5 **Test circuit and typical characteristics 9**

6 **Package mechanical data 14**

7 **Revision history 18**

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

1 Pin configuration

Figure 1. Pin connections

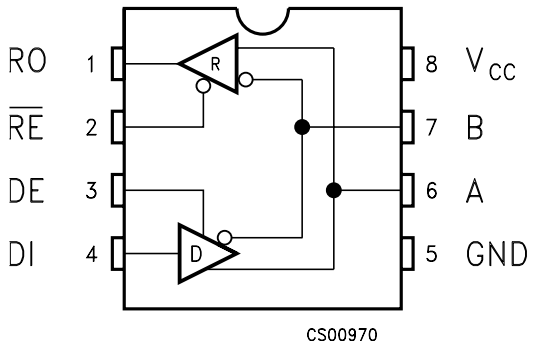


Table 2. Pin description

Pin n°	Symbol	Name and function
1	RO	Receiver output
2	RE	Receiver output enable
3	DE	Driver output enable
4	DI	Driver input
5	GND	Ground
6	A	Non-inverting receiver input and non-inverting driver output
7	B	Inverting receiver input and inverting driver output
8	V_{CC}	Supply voltage

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2 Truth tables

Table 3. Truth table (driver)

Inputs			Outputs	
RE	**DE**	**DI**	**B**	**A**
X	H	H	L	H
X	H	L	H	L
X	L	X	Z	Z

Note: X = Don't care; Z = High impedance

Table 4. Truth table (receiver)

Inputs			Outputs
RE	**DE**	**A-B**	**RO**
L	L	≥ +0.2V	H
L	L	≤ -0.2V	L
L	L	Inputs open	H
H	L	X	Z

Note: X = Don't care; Z = High impedance

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3 Maximum ratings

Table 5. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage	7	V
V_I	Control input voltage ($\overline{RE}$, DE)	-0.5 to (V_{CC} + 0.5)	V
V_{DI}	Driver input voltage (DI)	-0.5 to (V_{CC} + 0.5)	V
V_{DO}	Driver output voltage (A, B)	± 14	V
V_{RI}	Receiver input voltage (A, B)	± 14	V
V_{RO}	Receiver output voltage (RO)	-0.5 to (V_{CC} + 0.5)	V

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

4 Electrical characteristics

V_{CC} = 5 V ± 5 %, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are referred to T_A = 25 °C

Table 6. DC electrical characteristics

Symbol	Parameter	Test conditions (1)	Value					Unit
			-40 to 85 °C			-55 to 125 °C		
			Min.	Typ.	Max.	Min.	Max.	
V_{OD1}	Differential driver output (no load)				5		5	V
V_{OD2}	Differential driver output (with load)	R_L = 27Ω (RS-485) *Figure 2* R_L = 50Ω (RS-422) *Figure 2*	1.5		5 5	1.4	5 5	V V
ΔV_{OD}	Change in magnitude of driver differential output voltage for complementary output states	R_L = 27Ω or 50Ω *Figure 2*			0.2		0.2	V
V_{OC}	Driver common-mode output voltage	R_L = 27Ω or 50Ω *Figure 2*			3		3	V
ΔV_{OC}	Change in magnitude of driver common-mode output voltage for complementary output states	R_L = 27Ω or 50Ω *Figure 2*			0.2		0.2	V
V_{IH}	Input high voltage	$\overline{RE}$, DE, DI	2.0			2.0		V
V_{IL}	Input low voltage	$\overline{RE}$, DE, DI			0.8		0.8	V
I_{IN1}	Input current	$\overline{RE}$, DE, DI			± 2		± 2	µA
I_{IN2}	Input current (A, B)	V_{CM} = 0V or 5.25V, V_{DE} = 0V V_{IN} = 12V V_{IN} = -7V			1 -0.8		1 -0.8	mA mA
V_{TH}	Receiver differential threshold voltage	V_{CM} = -7 to 12V	-0.2		0.2	-0.2	0.2	V
ΔV_{TH}	Receiver input hysteresis	V_{CM} = 0V		70				mV
V_{OH}	Receiver output high voltage	I_O = -4mA, V_{ID} = 200mV	3.5			3.4		V
V_{OL}	Receiver output low voltage	I_O = 4mA, V_{ID} = -200mV			0.4		0.55	V
I_{OZR}	3-state (high impedance) output current at receiver	V_O = 0.4 to 2.4V			± 1		± 1	µA
R_{IN}	Receiver input resistance	V_{CM} = -7 to 12V	24			24		kΩ
I_{CC}	No load supply current (2)	V_{RE} = 0V or V_{CC} V_{DE} = V_{CC} V_{DE} = 0V		400 300	900 500		900 500	µA µA

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 6. DC electrical characteristics (continued)

Symbol	Parameter	Test conditions (1)	Value					Unit
			-40 to 85 °C			-55 to 125 °C		
			Min.	Typ.	Max.	Min.	Max.	
I_{OSD1}	Driver short-circuit current, V_O=High	V_O = -7 to 12V (3)	35		250	35	250	mA
I_{OSD2}	Driver short-circuit current, V_O=Low	V_O = -7 to 12V (3)	35		250	35	250	mA
I_{OSR}	Receiver short-circuit current	V_O = 0V to V_{CC}	7		95	7	95	mA

1. All currents into device pins are positive; all cuttents out of device pins are negative; all voltages are referenced to device ground unless specified.
2. Supply current specification is valid for loaded transmitters when V_{DE} = 0V
3. Applies to peak current. See typical Operating Characteristics.

V_{CC} = 5 V ± 5 %, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are referred to T_A = 25 °C

Table 7. Driver switching characteristics

Symbol	Parameter	Test conditions (1)	Value					Unit
			-40 to 85 °C			-55 to 125°C		
			Min.	Typ.	Max.	Min.	Max.	
t_{PLH} t_{PHL}	Propagation delay input to output	R_{DIFF} = 54Ω, C_{L1} = C_{L2} = 100pF (See *Figure 4* and *Figure 6*)	10	30	60		70	ns
t_{SK}	Output skew to output	R_{DIFF} = 54Ω, C_{L1} = C_{L2} = 100pF (See *Figure 4* and *Figure 6*)		5	10		10	ns
t_{TLH} t_{THL}	Rise or fall time	R_{DIFF} = 54Ω, C_{L1} = C_{L2} = 100pF (See *Figure 4* and *Figure 6*)	3	15	40	3	45	ns
t_{PZH}	Output enable time	C_L = 100pF, S2 = Closed (See *Figure 5* and *Figure 7*)		70	90		90	ns
t_{PZL}	Output enable time	C_L = 100pF, S1 = Closed (See *Figure 5* and *Figure 7*)		70	90		90	ns
t_{PLZ}	Output disable time	C_L = 15pF, S1 = Closed (See *Figure 5* and *Figure 7*)		70	90		90	ns
t_{PHZ}	Output disable time	C_L = 15pF, S2 = Closed (See *Figure 5* and *Figure 7*)		70	90		90	ns

1. All currents into device pins are positive; all cuttents out of device pins are negative; all voltages are referenced to device ground unless specified.

深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

V_{CC} = 5 V ± 5%, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are referred to T_A = 25 °C

Table 8. Receiver switching characteristics

Symbol	Parameter	Test conditions (1)	Value					Unit
			-40 to 85 °C			-55 to 125°C		
			Min.	Typ.	Max.	Min.	Max.	
t_{PLH} t_{PHL}	Propagation delay input to output	R_{DIFF}=54Ω, C_{L1} = C_{L2} = 100pF (See *Figure 4* and *Figure 8*)	20	130	210		230	ns
t_{SKD}	Differential receiver skew	R_{DIFF}=54Ω, C_{L1} = C_{L2} = 100pF (See *Figure 4* and *Figure 8*)		13				ns
t_{PZH}	Output enable time	C_{RL} = 15pF, S1 = Closed (See Fig. 2 and *Figure 9*)		20	50		56	ns
t_{PZL}	Output enable time	C_{RL} = 15pF, S2 = Closed (See Fig. 2 and *Figure 9*)		20	50		56	ns
t_{PLZ}	Output disable time	C_{RL} = 15pF, S1 = Closed (See Fig. 2 and *Figure 9*)		20	50		56	ns
t_{PHZ}	Output disable time	C_{RL} = 15pF, S2 = Closed (See Fig. 2 and *Figure 9*)		20	50		56	ns
f_{MAX}	Maximum data rate		2.5			2.5		Mbps

1. All currents into device pins are positive; all cuttents out of device pins are negative; all voltages are referenced to device ground unless specified

深圳市满度科技有限公司 Tel:150-1290-5940
Web:www.manduic.com Email:sales@manduic.com

5 Test circuit and typical characteristics

Figure 2. Driver DC test load

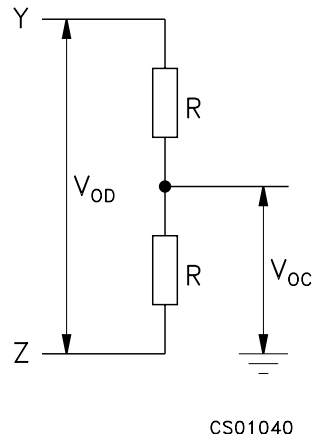


Figure 3. Receiver timing test load

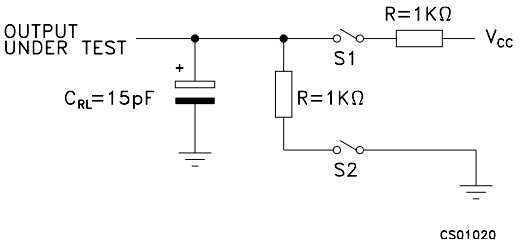


Figure 4. Drive/receiver timing test circuit


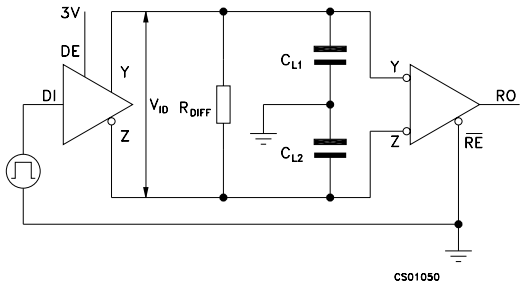


Figure 5. Driver timing test load

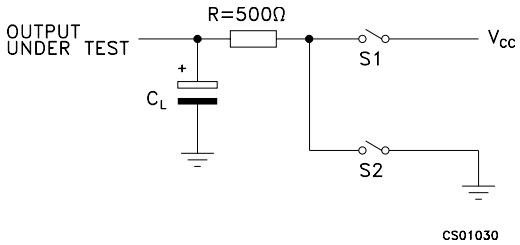

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 6. Driver propagation delay


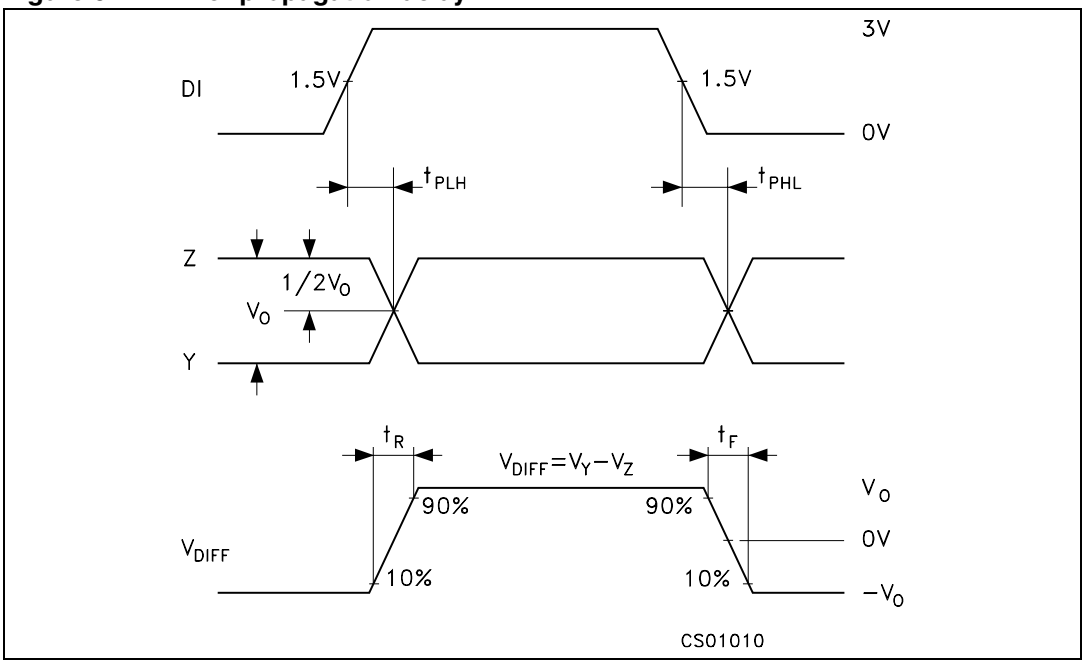


Figure 7. Driver enable and disable time

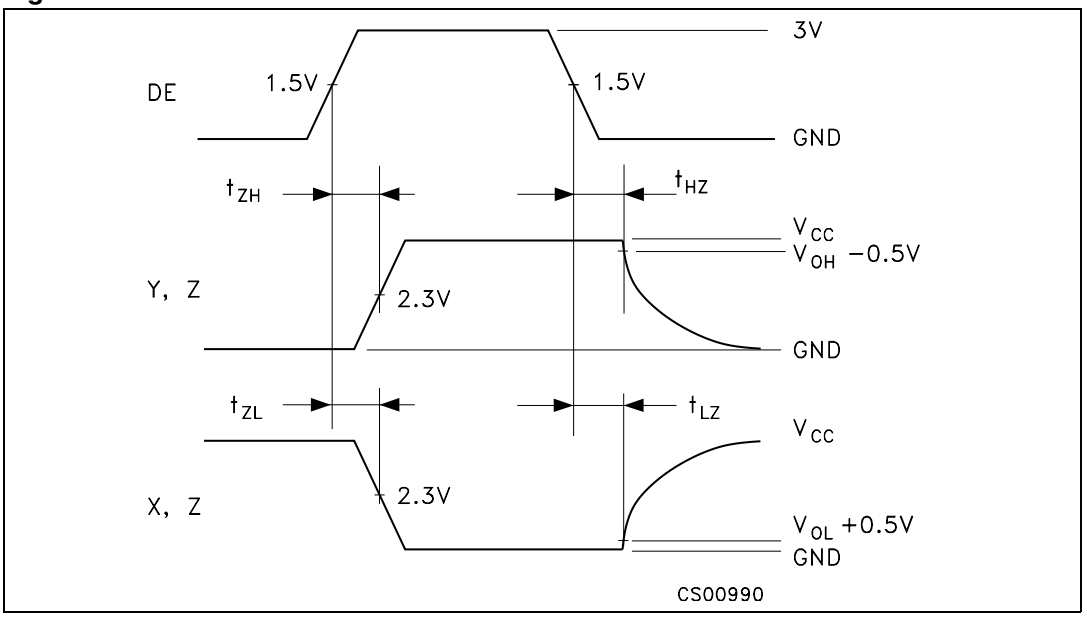

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 8. Receiver propagation delay


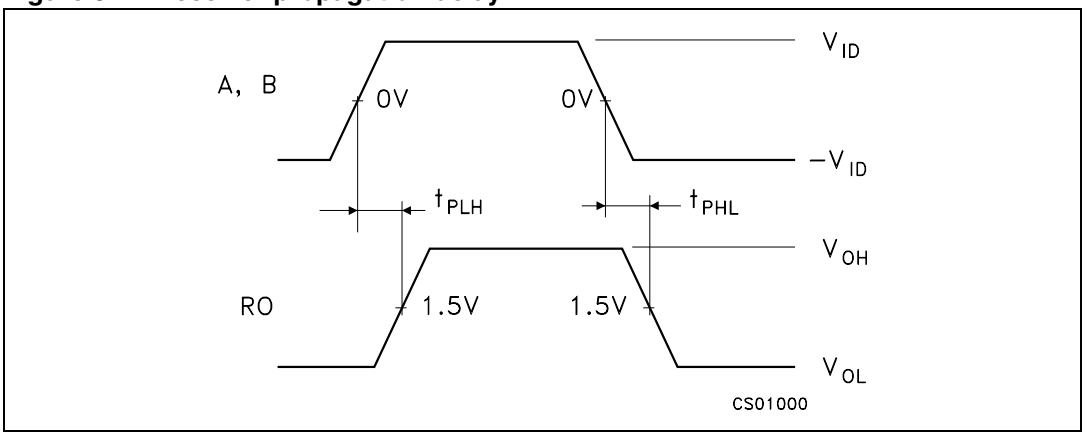


Figure 9. Receiver enable and disable time

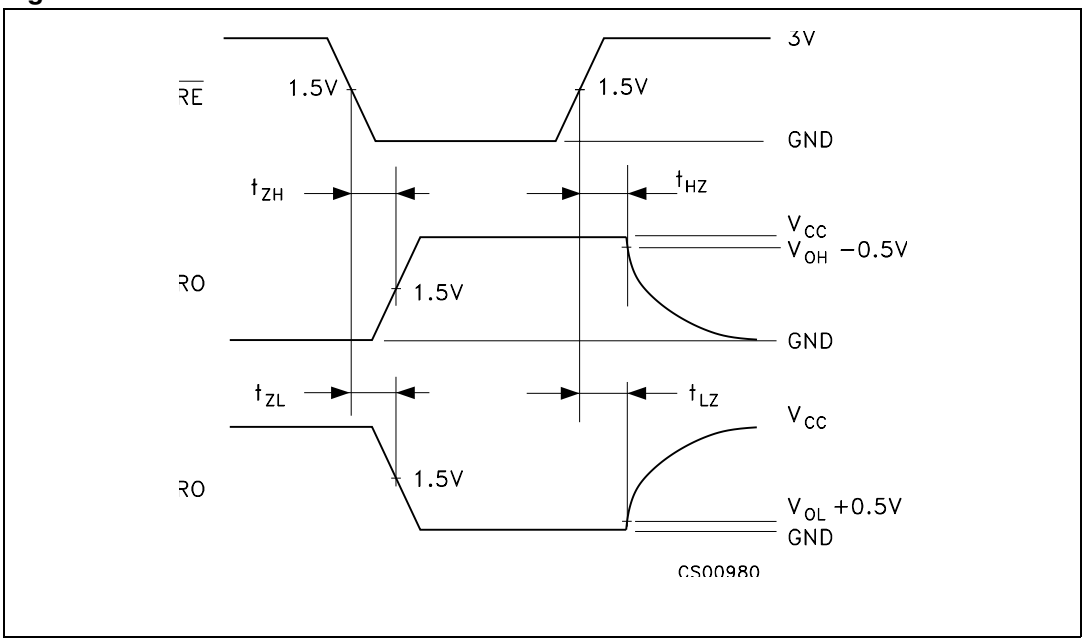

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 10. Receiver output current vs. output low voltage

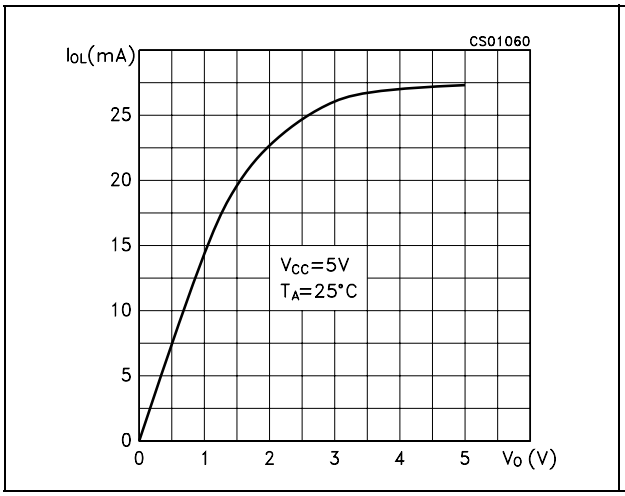


Figure 11. Receiver output current vs. output high voltage

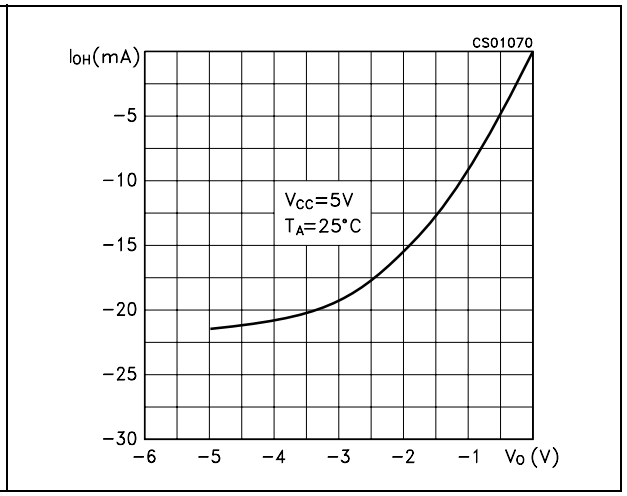


Figure 12. Driver output current vs. output low voltage

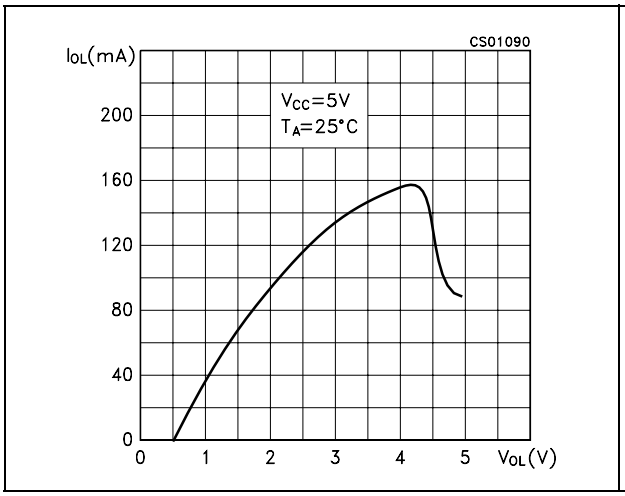


Figure 13. Driver output current vs. output high voltage

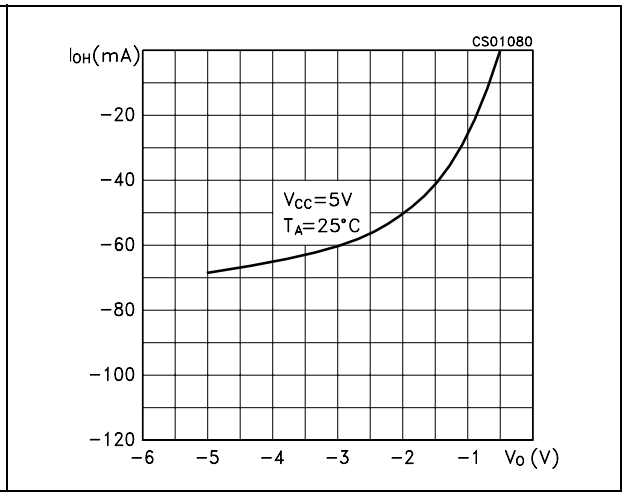


Figure 14. Supply current vs. temperature


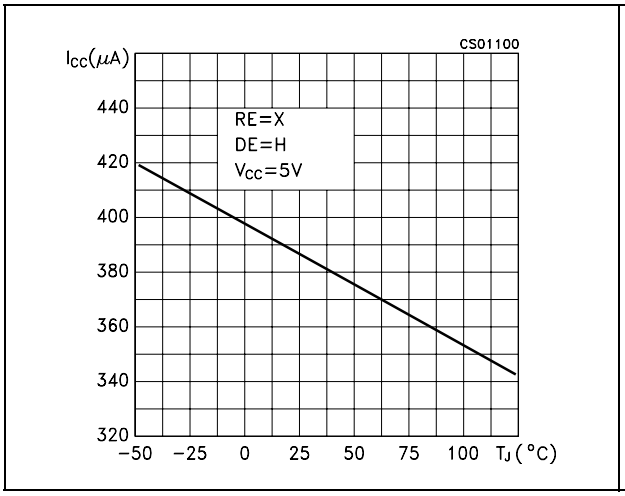


Figure 15. Receiver high level output voltage vs. temperature

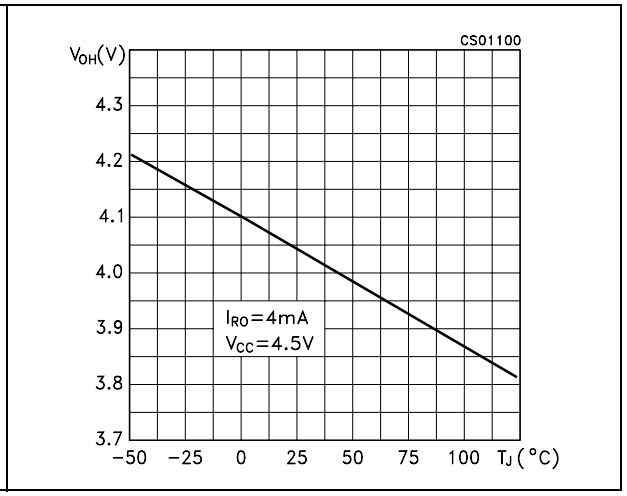

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 16. Receiver low level output voltage vs. temperature


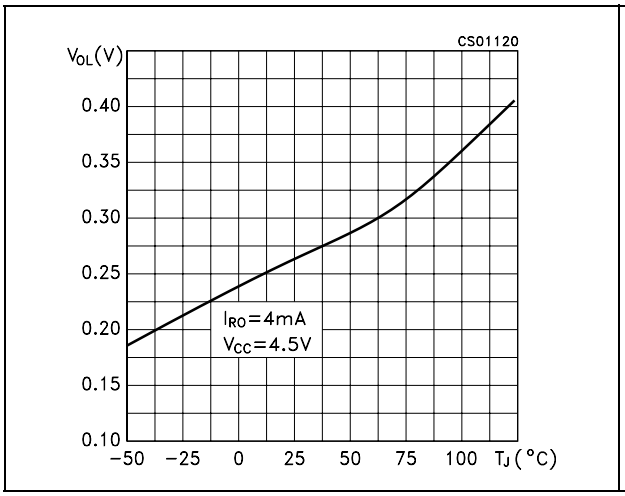


Figure 17. Differential driver output voltage vs. temperature

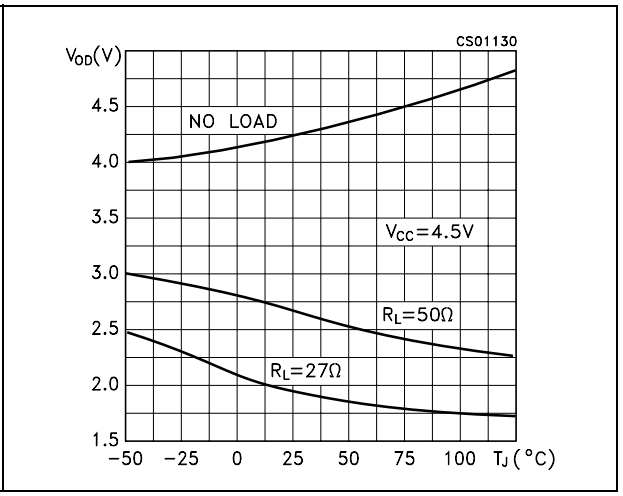

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Plastic DIP-8 mechanical data

Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.3			0.130	
a1	0.7			0.028		
B	1.39		1.65	0.055		0.065
B1	0.91		1.04	0.036		0.041
b		0.5			0.020	
b1	0.38		0.5	0.015		0.020
D			9.8			0.386
E		8.8			0.346	
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			7.1			0.280
I			4.8			0.189
L		3.3			0.130	
Z	0.44		1.6	0.017		0.063

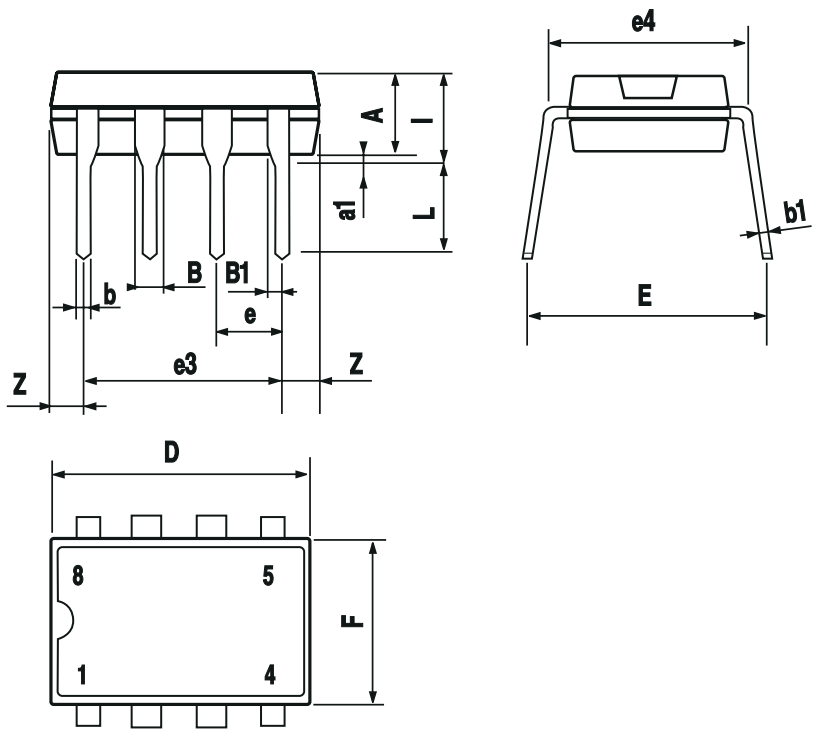


P001F

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

SO-8 mechanical data


Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.35		1.75	0.053		0.069
A1	0.10		0.25	0.04		0.010
A2	1.10		1.65	0.043		0.065
B	0.33		0.51	0.013		0.020
C	0.19		0.25	0.007		0.010
D	4.80		5.00	0.189		0.197
E	3.80		4.00	0.150		0.157
e		1.27			0.050	
H	5.80		6.20	0.228		0.244
h	0.25		0.50	0.010		0.020
L	0.40		1.27	0.016		0.050
k	8° (max.)					
ddd			0.1			0.04

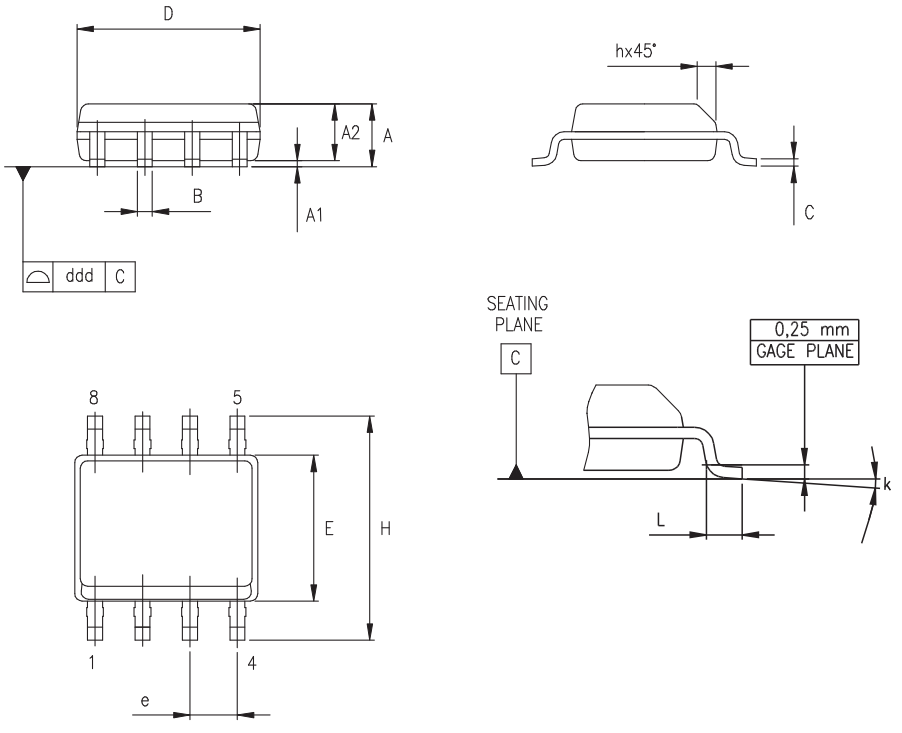

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Tape & reel SO-8 mechanical data

Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao	8.1		8.5	0.319		0.335
Bo	5.5		5.9	0.216		0.232
Ko	2.1		2.3	0.082		0.090
Po	3.9		4.1	0.153		0.161
P	7.9		8.1	0.311		0.319

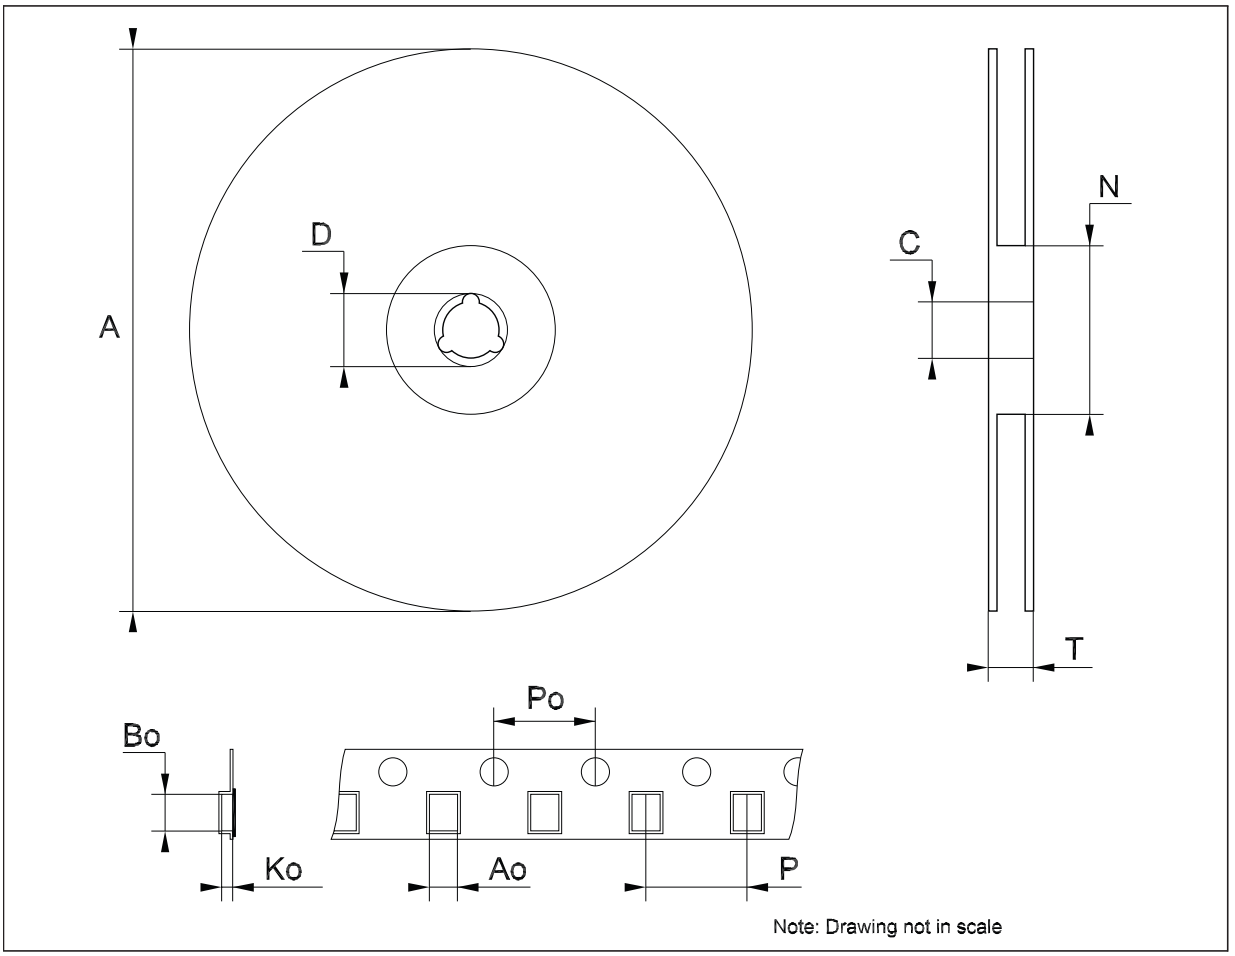

Note: Drawing not in scale

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7 Revision history

Table 9. Document revision history

Date	Revision	Changes
21-Mar-2006	12	Order codes has been updated and new template.
02-Aug-2006	13	Mistake in cover page first row mA ==> µA.
08-Nov-2006	14	Added: *Table 1*.
07-Feb-2008	15	Modified: *Table 1 on page 1*.
16-Feb-2009	16	Modified *Note: on page 5*.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER’S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com