Ultra high stability temperature compensated crystal oscillator

Product name : TG5032CGN / TG5032SGN

Features

- Ultra high stability (≤ 0.1 x 10^{-6})
- Low phase noise
- Frequency range : 10 MHz to 40 MHz
- Output : CMOS, Clipped sine wave
- Supply voltage : 2.375 to 3.63 V
- External dimensions : 5.0 × 3.2 × 1.45 mm
- Small size package (10 pads)
- Pb free.
- Complies with EU RoHS directive.



TG5032CGN (CMOS output)

TG5032SGN (Clipped sine wave output)


Applications

- Small Cells
- Stratum3
- Femtocell
- Network system etc..

Description


This product is ultra high stability temperature compensated crystal oscillator of CMOS and Clipped sine wave outputs using fundamental oscillation of Crystal unit. This has realized a low phase noise in frequency 10 to 40 MHz, and it is suitable for the reference clock include Small Cells.
This allows the product to be compliant with various standards including GR-1244-CORE Stratum3, G.8262.1, G.8273.2 (Class A,B).


Outline dimensions

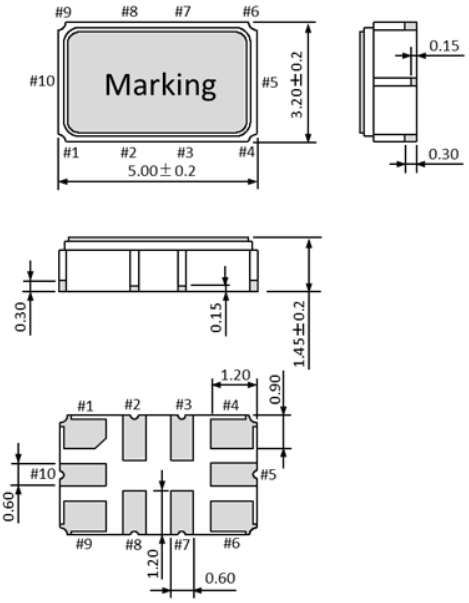

Characteristics

Frequency / temperature characteristics

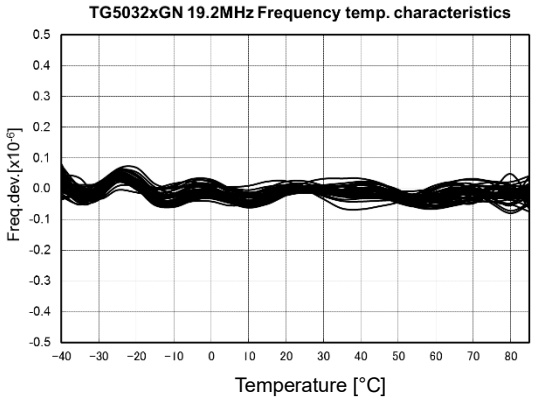

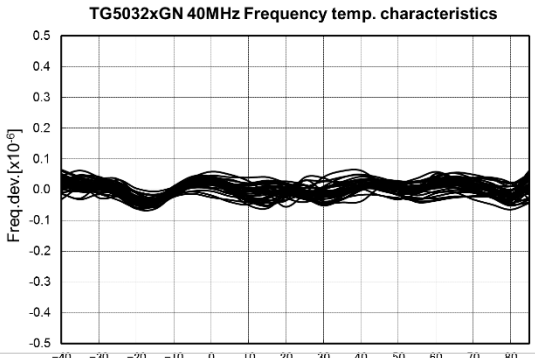

Pin information

Pin	Connections	
	VC-TCXO	TCXO
1	Vc	N.C
3	OE	
4	GND	
6	OUT	
7	Filter / N.C	
9	V_{CC}	
2, 5, 8, 10	N.C	

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
微信扫码咨询客服

1. Product Number / Product Name

(1-1) Product Number / Ordering Code

TG5032CGN: X1G005231xxxx00 (Please contact Epson for details of number xxxx)
TG5032SGN: X1G005241xxxx00 (The last 2 digits code (00) define Quantity. 1 000 pcs/Reel)

(1-2) Product Name / Model Name (Standard form)

TG5032CGN	10.000000MHz	CAGHDA
①	③	④⑤⑥⑦⑧⑨

① Model
② Output
③ Frequency
④ Supply voltage
⑤ Frequency / temperature
⑥ Operation temperature
⑦ OE function (H: Active High)
⑧ Vc function & Filter option
⑨ Internal identification code ("A" is default)

②	Output
C	CMOS
S	Clipped sine Wave

⑤	Frequency / temperature
A	±0.1 x 10^{-6}
B	±0.28 x 10^{-6}

⑧	Vc function	Filter option
N	Non Vc	Non Filter
E	Vc = 1.65 V	
D	Vc = 1.5 V	
G	Non Vc	Filter ON
K	Vc = 1.65 V	
J	Vc = 1.5 V	

④	Supply voltage
C	3.3 V

⑥	Operation temperature
G	-40 ºC to +85 ºC

⑦	OE function
H	Active High

2. Electrical characteristics

1) Absolute maximum ratings

Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Supply voltage	V_{CC}-GND	V	-0.5	-	+4.0	
Storage temperature	T_stg	°C	-40	-	+90	Store as bare product after packing
Frequency control voltage	V_C-GND	V	-0.5	-	V_{CC}+0.5	Vc Terminal

2) Operating conditions

Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Supply voltage	V_{CC}	V	2.375	-	3.63	Supply voltage range
			3.135	3.3	3.465	V_{CC} = 3.3 V Type
	GND	V	0.0	-	0.0	
Operating temperature range	T_use	°C	-40	+25	+85	
Frequency control voltage	Vc	V	GND	N.C.	-	Vc Terminal / TCXO
			0.5	1.5	2.5	Vc Terminal / VC-TCXO
			0.65	1.65	2.65	
Output load condition	Load_C	pF	13.5	15	16.5	CMOS output
	Load_C	pF	9	10	11	Clipped sine wave
	Load_R	kΩ	9	10	11	
	Cc	µF	0.01	-	-	DC-cut capacitor *1 Clipped sine wave

*1 DC-cut capacitor is not included in this TCXO. Please attach an external DC-cut capacitor (0.01 µF Min.) to the out pin.

3-1) Frequency characteristics

(V_{CC} = Typ., GND = 0.0 V, Vc = Typ. V, Load = Typ., T_use = +25 °C)

Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Output frequency	fo	MHz	10	-	40	
			10, 12.8, 19.2, 20, 24,576, 25, 25.6, 26, 30.72, 38.4, 38.88, 40			Standard frequency list
Frequency tolerance *2	f_tol	× 10^{-6}	-1.0	-	+1.0	T_use = +25 °C ± 2 °C Reflow cycles : 2 times
Frequency / temperature characteristics (Reference to (fmax+fmin)/2.)	fo-Tc	× 10^{-6}	-0.10	-	+0.10	T_use = -40 °C to +85 °C (Standard)
			-0.28	-	+0.28	T_use = -40 °C to +85 °C
Frequency / load coefficient	fo-Load	× 10^{-6}	-0.10	-	+0.10	Load ± 10 %
			-0.05	-	+0.05	Load ± 2 %
Frequency / voltage coefficient	fo-V_{CC}	× 10^{-6}	-0.10	-	+0.10	V_{CC} ± 5 %
			-0.05	-	+0.05	V_{CC} ± 2 %
Frequency slope	-	× 10^{-6} / °C	-0.10	-	+0.10	T_use = -40 °C to +85 °C, One frequency reading every 5 °C Min.
Hysteresis	-	× 10^{-6}	-0.20	-	+0.20	Frequency measured before and after at +25 °C.
Frequency aging *6	f_age	× 10^{-6}	-0.5	-	+0.5	T_use = +25 °C, First year
			-3.0	-	+3.0	T_use = +25 °C, 20 years
Holdover stability (Constant temperature)	-	× 10^{-6}	-0.01	-	+0.01	T_use = +25 °C, 1 day *3
			-0.04	-	+0.04	T_use = +25 °C, 1 day *4
Holdover stability (Free - run accuracy)	-	× 10^{-6}	-4.6	-	+4.6	*5
Acceleration sensitivity	-	× 10^{-9} / G	-	2.0	-	3 axes, 30-1500 Hz

*2 Measured 24 hours after reflow soldering.
*3 After 10 days of continuous operation.
*4 After 48 hours of continuous operation.
*5 This includes initial frequency tolerance, frequency / temperature characteristics, frequency / load coefficient, frequency/voltage coefficient and frequency aging (+25 °C , 20 years)
*6 Aging stability is estimated from environmental reliability tests and the expected amount of the frequency variation over time. It is not intend as a guarantee of performance over the product-life cycle

3-2) Frequency control characteristics

(V_{CC} = Typ., GND = 0.0 V, Vc = Typ. V, Load = Typ., T_use = +25 °C)

Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Frequency control range	f_cont	× 10^{-6}	-10.0	-	-5.0	Vc = 1.5 V ± 1.0 V, Vc = 1.65 V ± 1.0 V
			+5.0	-	+10.0	
Linearity	-	%	-10	-	+10	
Input impedance	Z_{IN}	kΩ	100	-	-	Vc-GND(DC), Vc = Typ.
Frequency change polarity	-	-	Positive polarity			

4) Electrical Characteristics

(V_{CC} = Typ., GND = 0.0 V, Vc = Typ. V, Load = Typ., T_use = +25 °C)

Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Current consumption	I_{CC}	mA	-	-	5.0	Clipped sine wave
			-	-	5.0	CMOS output (~26 MHz)
			-	-	6.0	CMOS output (~40 MHz)
Start up time	t_str	ms	-	-	5.0	t = 0 at 90 % V_{CC}, Filter-off
		s	-	-	2.0	t = 0 at 90 % V_{CC}, Filter-on
Rise time	tr	ns	-	-	8.0	10 %V_{CC} to 90 %V_{CC} level CMOS output
Fall time	tf	ns	-	-	8.0	90 %V_{CC} to 10 %V_{CC} level CMOS output
Symmetry	SYM	%	45	50	55	50 %V_{CC} level CMOS output
High output voltage	V_{OH}	V	90 % V_{CC}	-	-	CMOS output
Low output voltage	V_{OL}	V	-	-	10 % V_{CC}	CMOS output
Output level	Vpp	V	0.8	-	-	Clipped sine wave
Phase Noise 10 MHz Filter off TCXO mode	L(f)	dBc/Hz	-	-63	-	1 Hz offset
			-	-92	-	10 Hz offset
			-	-118	-	100 Hz offset
			-	-139	-	1 kHz offset
			-	-153	-	10 kHz offset
			-	-155	-	100 kHz offset
			-	-156	-	1 MHz offset
Phase Noise 25 MHz Filter off TCXO mode () is VC-TCXO mode	L(f)	dBc/Hz	-	-64(-61)	-	1 Hz offset
			-	-92(-90)	-	10 Hz offset
			-	-118(-116)	-	100 Hz offset
			-	-139(-137)	-	1 kHz offset
			-	-153(-152)	-	10 kHz offset
			-	-154(-154)	-	100 kHz offset
			-	-156(-156)	-	1 MHz offset
Phase Noise 30.72 MHz Filter off TCXO mode () is VC-TCXO mode	L(f)	dBc/Hz	-	-64(-60)	-	1 Hz offset
			-	-92(-88)	-	10 Hz offset
			-	-118(-115)	-	100 Hz offset
			-	-139(-137)	-	1 kHz offset
			-	-153(-152)	-	10 kHz offset
			-	-154(-154)	-	100 kHz offset
			-	-157(-156)	-	1 MHz offset
Phase Noise 40 MHz Filter off TCXO mode () is VC-TCXO mode	L(f)	dBc/Hz	-	-61(-57)	-	1 Hz offset
			-	-89(-86)	-	10 Hz offset
			-	-114(-111)	-	100 Hz offset
			-	-135(-133)	-	1 kHz offset
			-	-150(-149)	-	10 kHz offset
			-	-152(-151)	-	100 kHz offset
			-	-155(-154)	-	1 MHz offset

Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Phase Noise 10 MHz Filter on TCXO mode	L(f)	dBc/Hz	-	-63	-	1 Hz offset
			-	-91	-	10 Hz offset
			-	-116	-	100 Hz offset
			-	-137	-	1 kHz offset
			-	-153	-	10 kHz offset
			-	-155	-	100 kHz offset
			-	-156	-	1 MHz offset
Phase Noise 25 MHz Filter on TCXO mode () is VC-TCXO mode	L(f)	dBc/Hz	-	-63(-60)	-	1 Hz offset
			-	-92(-89)	-	10 Hz offset
			-	-115(-116)	-	100 Hz offset
			-	-136(-138)	-	1 kHz offset
			-	-153(-152)	-	10 kHz offset
			-	-154(-154)	-	100 kHz offset
			-	-156(-156)	-	1 MHz offset
Phase Noise 30.72 MHz Filter on TCXO mode () is VC-TCXO mode	L(f)	dBc/Hz	-	-63(-60)	-	1 Hz offset
			-	-94(-91)	-	10 Hz offset
			-	-122(-117)	-	100 Hz offset
			-	-143(-139)	-	1 kHz offset
			-	-153(-153)	-	10 kHz offset
			-	-154(-154)	-	100 kHz offset
			-	-157(-156)	-	1 MHz offset
Phase Noise 40 MHz Filter on TCXO mode () is VC-TCXO mode	L(f)	dBc/Hz	-	-62(-58)	-	1 Hz offset
			-	-91(-87)	-	10 Hz offset
			-	-118(-113)	-	100 Hz offset
			-	-139(-135)	-	1 kHz offset
			-	-151(-150)	-	10 kHz offset
			-	-152(-151)	-	100 kHz offset
			-	-155(-154)	-	1 MHz offset

5) Enable/disable input

(V_{CC} = Typ., GND = 0.0 V, Vc = Typ. V, Load = Typ., T_use = +25 °C)


Parameter	Symbol	Unit	Min.	Typ.	Max	Notes
Enable voltage	V_{IH}	V	70 % V_{CC}	-	V_{CC}	OE terminal (Enable voltage)
Disable voltage	V_{IL}	V	-	-	30 % V_{CC}	OE terminal (Disable voltage)
Input impedance	-	kΩ	50	-	-	V_{CC} = Typ.


3. Characteristics

3-1) “Frequency / Temperature Characteristics”


3-1-1) Standard spec : ±0.1 × 10^{-6} Max. (T_use = -40 °C to +85 °C)


19.2 MHz [N = 40 pcs]

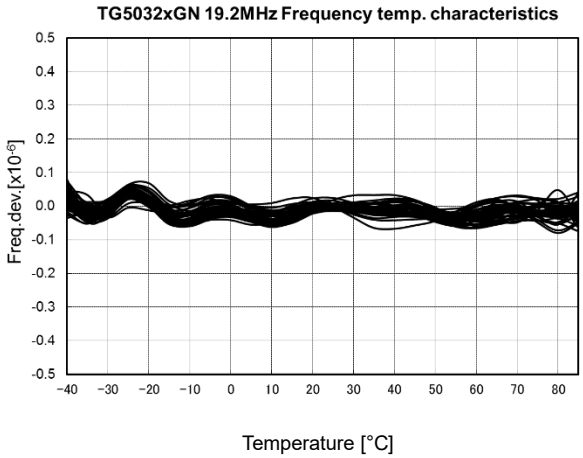

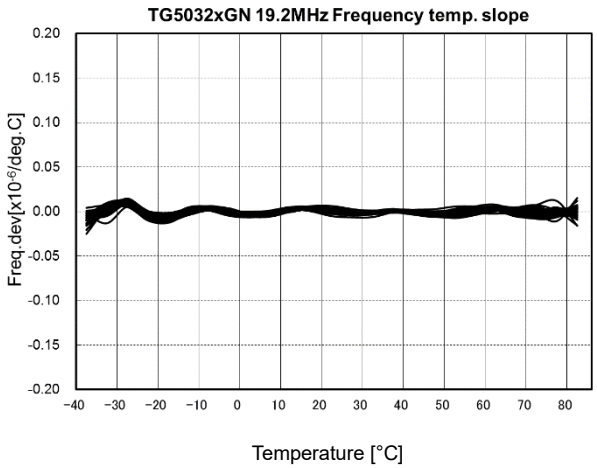



30.72 MHz [N = 40 pcs]

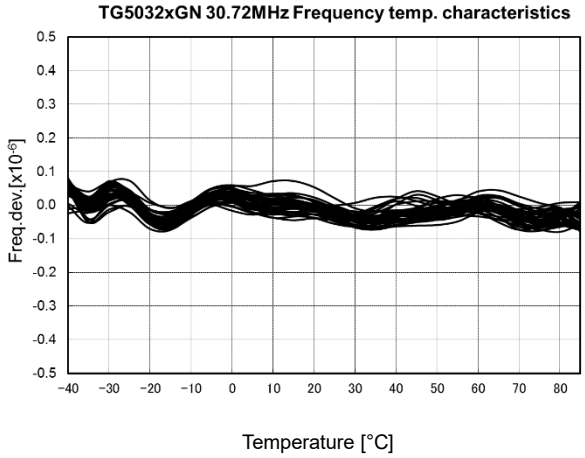

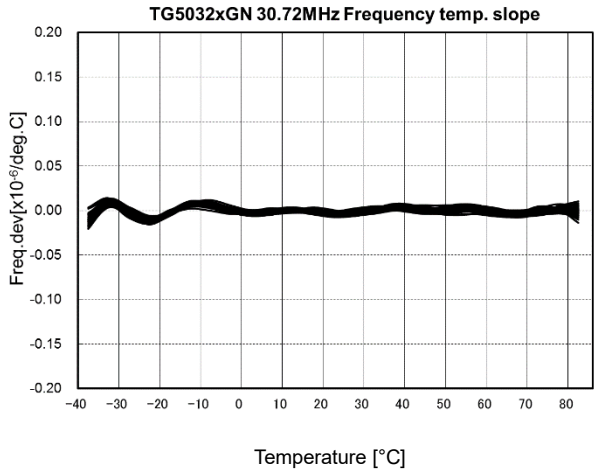


40 MHz [N = 40 pcs]

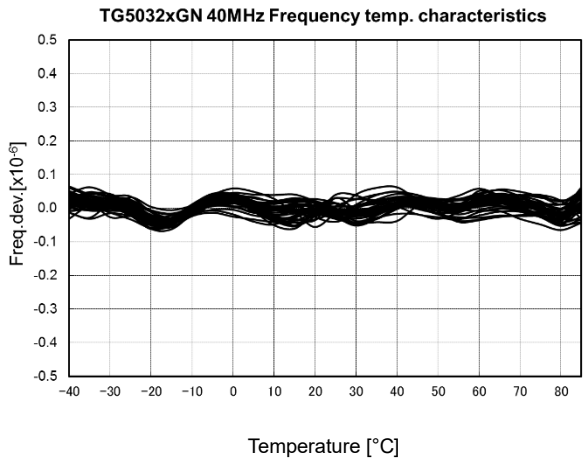

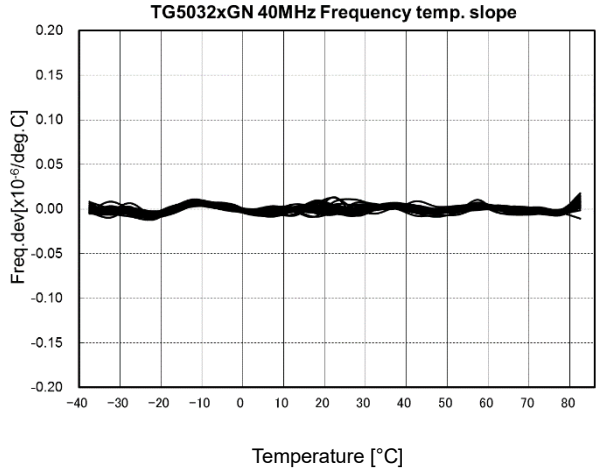

3-2) Frequency Aging (40 MHz) [N = 5 pcs]


* Aging is estimated from environmental reliability tests and the expected amount of frequency variation over time.
It is not intended as a guarantee of performance over the product-life cycle

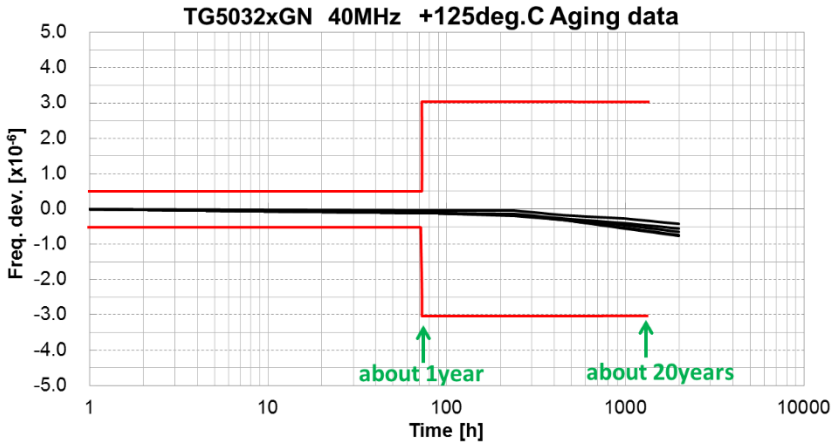


about 1year
Ave. : -0.10 x 10^{-6}
Max. : -0.05 x 10^{-6}
Min. : -0.12 x 10^{-6}


about 20years
Ave. : -0.54 x 10^{-6}
Max. : -0.35 x 10^{-6}
Min. : -0.66 x 10^{-6}

3-3) Holdover Stability (19.2 MHz) [N = 40 pcs]

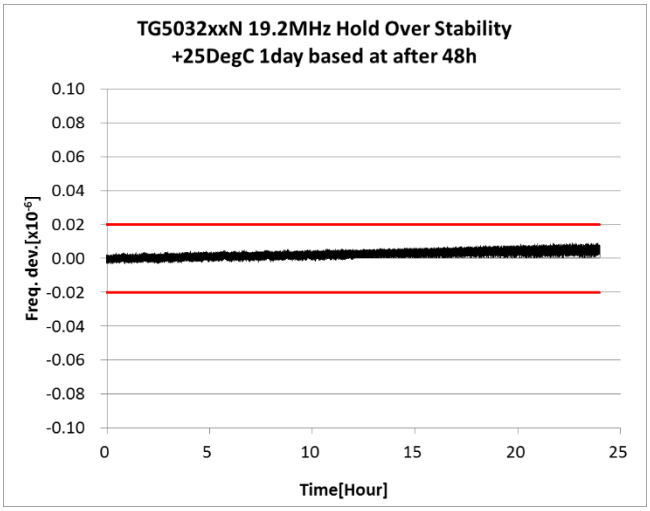



3-4) Frequency Control Characteristics [N = 40 pcs]

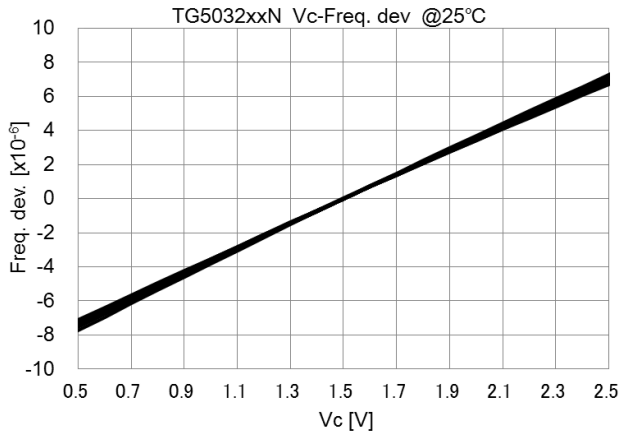

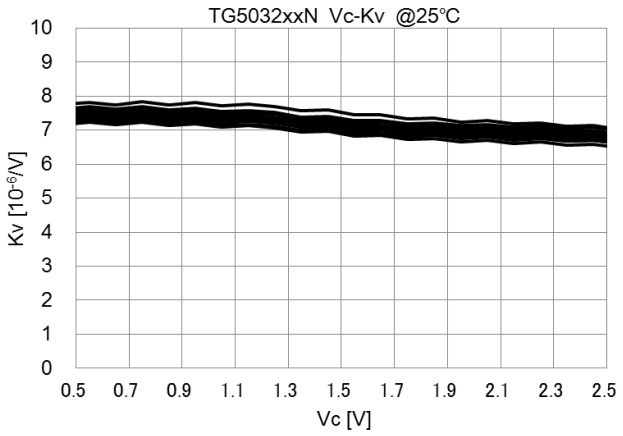



3-5) Current Consumption

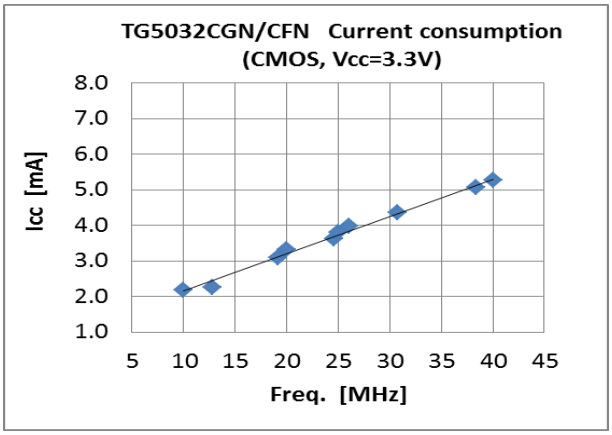

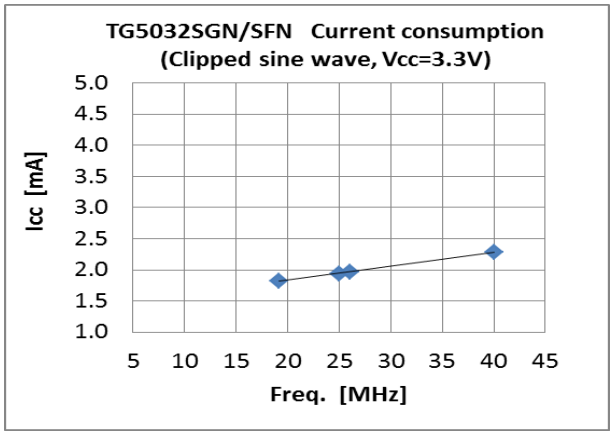



3-6) Rise time / Fall time (at CMOS output)

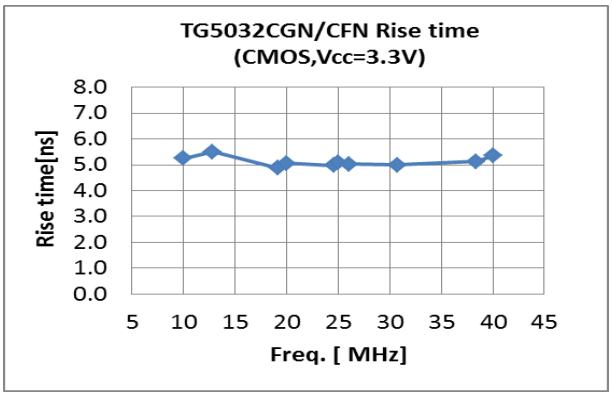

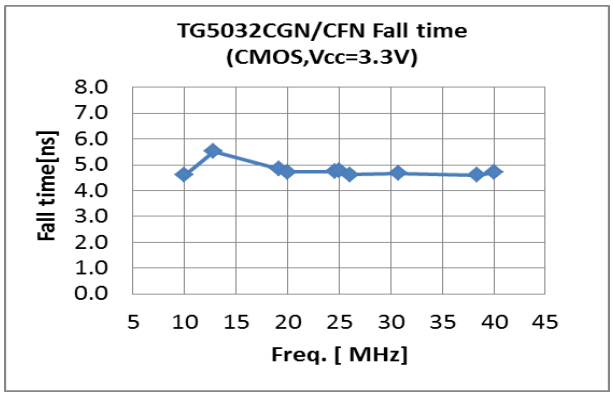


3-7) Output voltage [V_{OH}, V_{OL}] (at CMOS output)

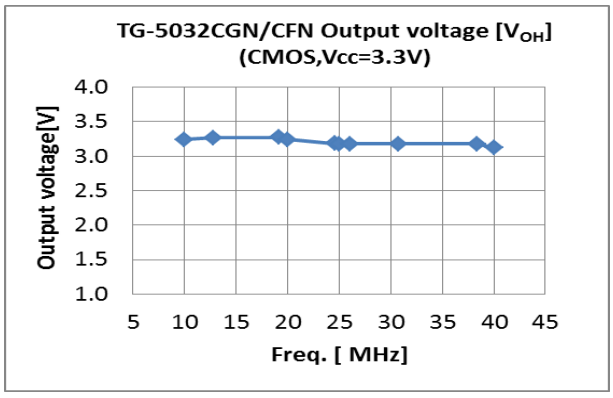


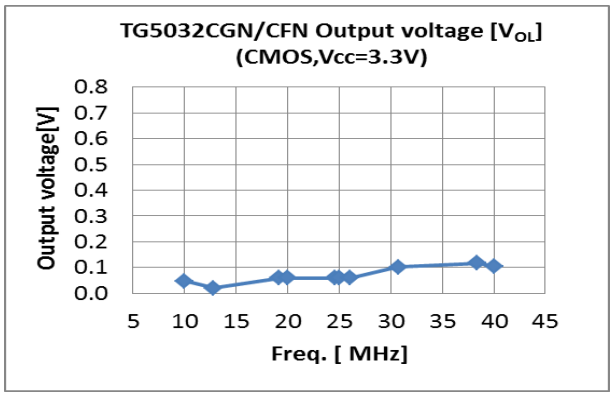

3-8) Symmetry (at CMOS output)

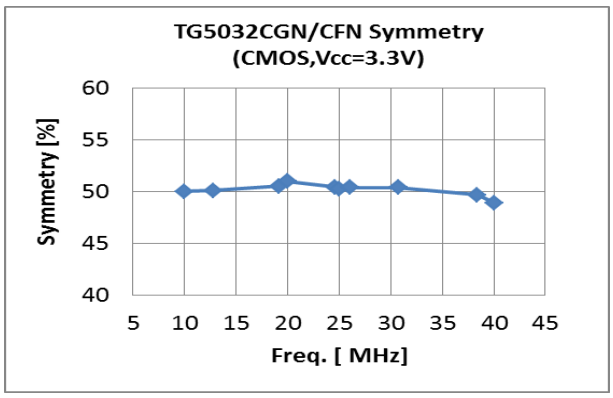


3-9) Output level [V_{PP}] (at Clipped sine wave)

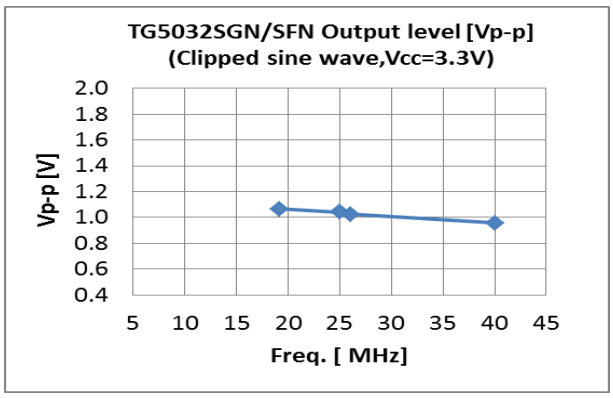


3-10) Start up time (19.2 MHz, 40 MHz)

19.2 MHz

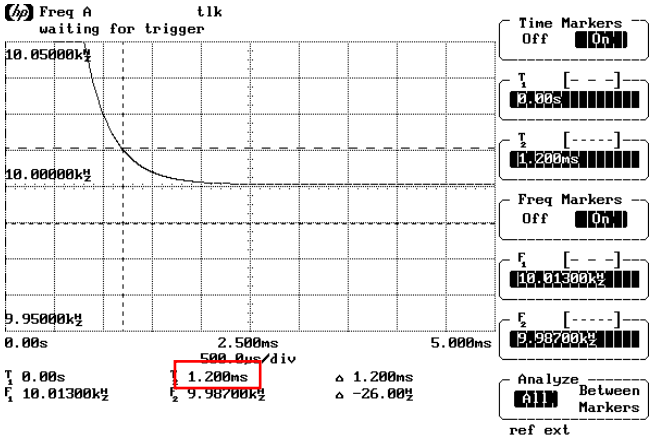


40 MHz

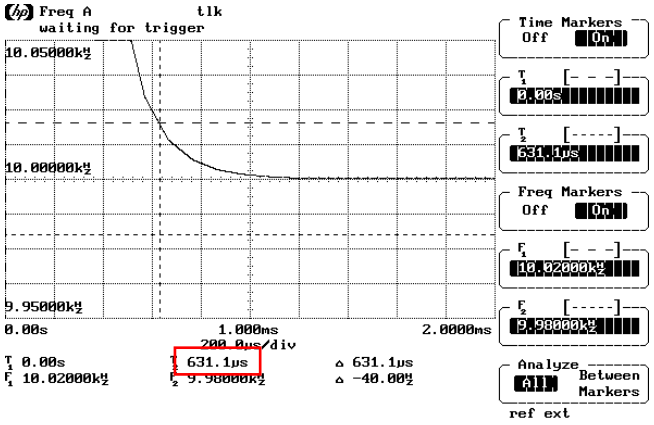

3-11) Phase noise (10 MHz, 25 MHz)


10 MHz

10MHz, Clipped sine, Vc-off, Filter-off, 25℃

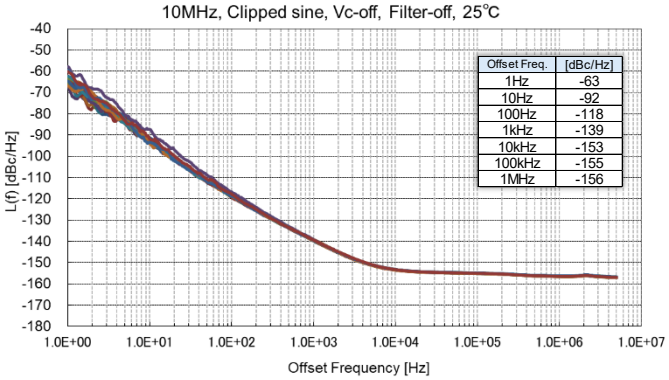


Offset Freq.	[dBc/Hz]
1Hz	-63
10Hz	-92
100Hz	-118
1kHz	-139
10kHz	-153
100kHz	-155
1MHz	-156

10MHz, CMOS, Vc-off, Filter-on, 25℃

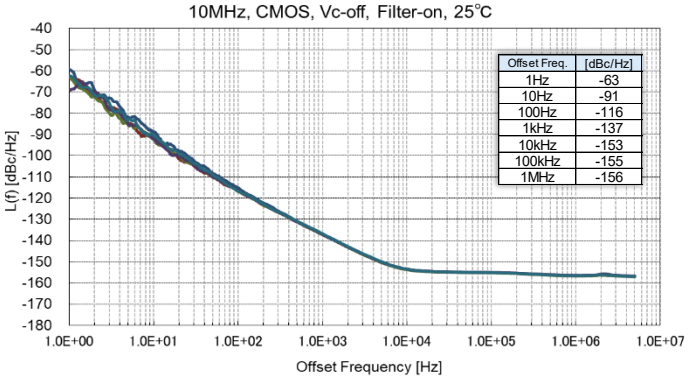


Offset Freq.	[dBc/Hz]
1Hz	-63
10Hz	-91
100Hz	-116
1kHz	-137
10kHz	-153
100kHz	-155
1MHz	-156

10MHz, Clipped sine, Vc-on, Filter-off, 25℃

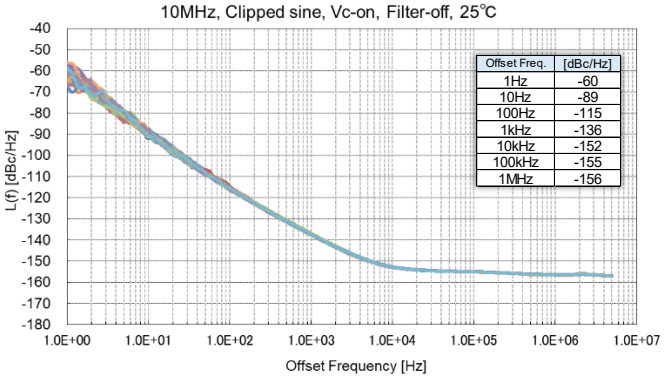

Offset Freq.	[dBc/Hz]
1Hz	-60
10Hz	-89
100Hz	-115
1kHz	-136
10kHz	-152
100kHz	-155
1MHz	-156


10MHz, CMOS, Vc-on, Filter-on, 25℃

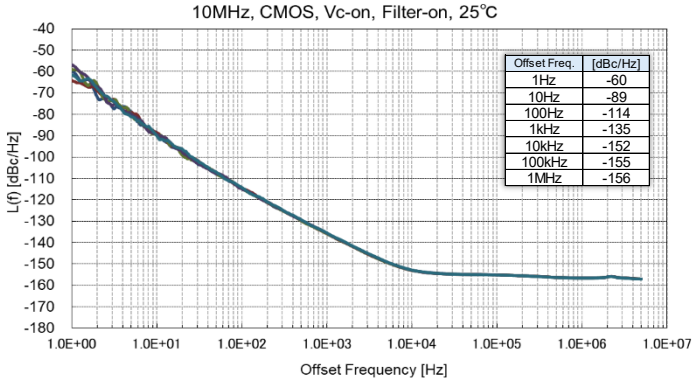

Offset Freq.	[dBc/Hz]
1Hz	-60
10Hz	-89
100Hz	-114
1kHz	-135
10kHz	-152
100kHz	-155
1MHz	-156


25 MHz

25MHz, Clipped sine, Vc-off, Filter-off, 25℃

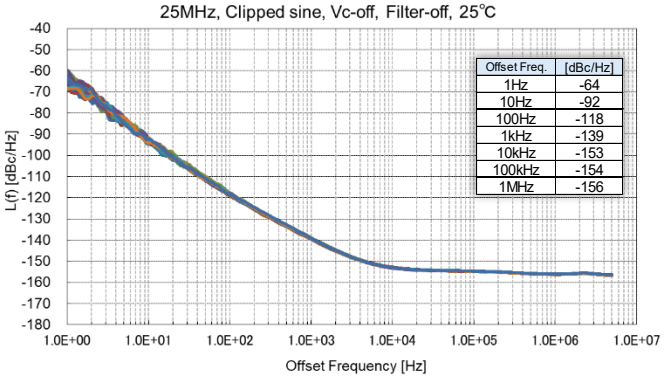


Offset Freq.	[dBc/Hz]
1Hz	-64
10Hz	-92
100Hz	-118
1kHz	-139
10kHz	-153
100kHz	-154
1MHz	-156

25MHz, Clipped sine, Vc-off, Filter-on, 25℃

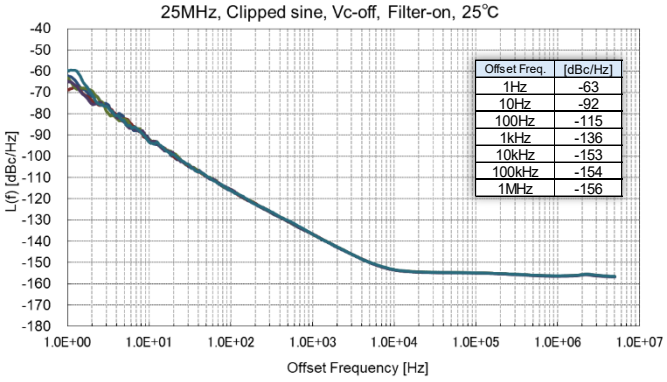


Offset Freq.	[dBc/Hz]
1Hz	-63
10Hz	-92
100Hz	-115
1kHz	-136
10kHz	-153
100kHz	-154
1MHz	-156

25MHz, CMOS, Vc-on, Filter-off, 25℃

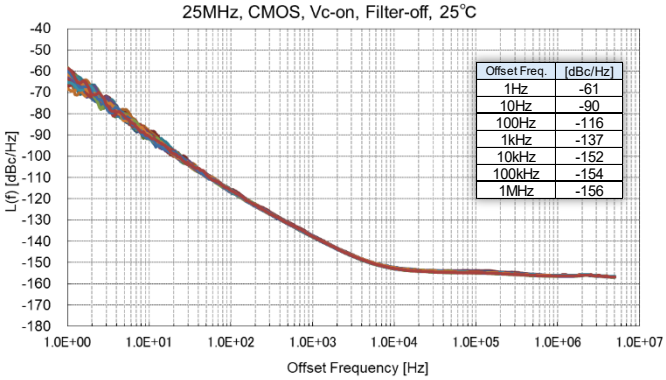

Offset Freq.	[dBc/Hz]
1Hz	-61
10Hz	-90
100Hz	-116
1kHz	-137
10kHz	-152
100kHz	-154
1MHz	-156

25MHz, CMOS, Vc-on, Filter-on, 25℃

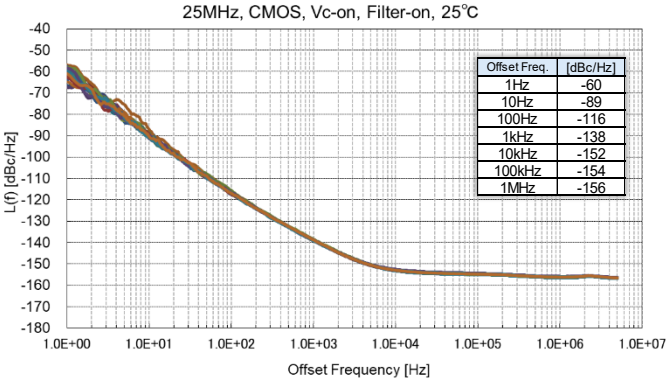


Offset Freq.	[dBc/Hz]
1Hz	-60
10Hz	-89
100Hz	-116
1kHz	-138
10kHz	-152
100kHz	-154
1MHz	-156

3-11) Phase noise (30.72 MHz, 40 MHz)


30.72 MHz

30.72MHz, CMOS, Vc-off, Filter-off, 25℃

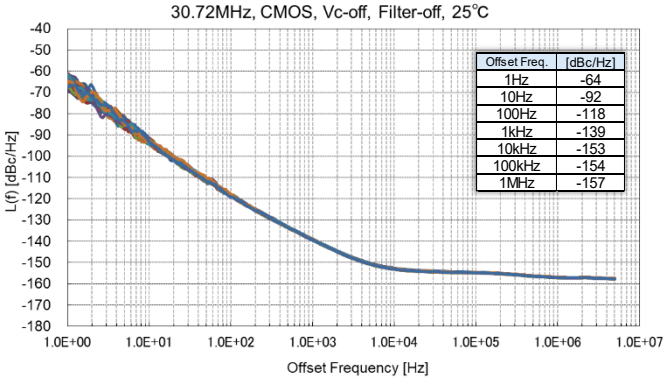


Offset Freq.	[dBc/Hz]
1Hz	-64
10Hz	-92
100Hz	-118
1kHz	-139
10kHz	-153
100kHz	-154
1MHz	-157

30.72MHz, CMOS, Vc-off, Filter-on, 25℃

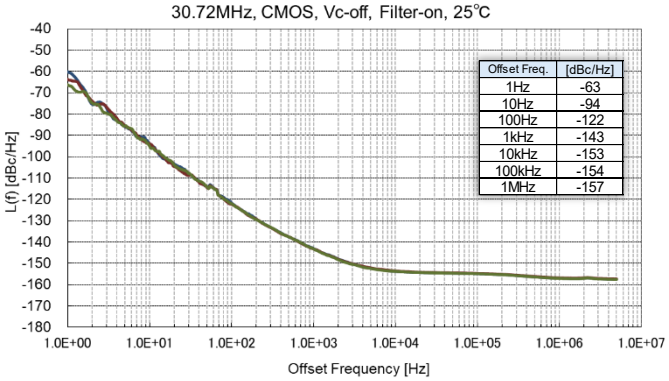


Offset Freq.	[dBc/Hz]
1Hz	-63
10Hz	-94
100Hz	-122
1kHz	-143
10kHz	-153
100kHz	-154
1MHz	-157

30.72MHz, CMOS, Vc-on, Filter-off, 25℃

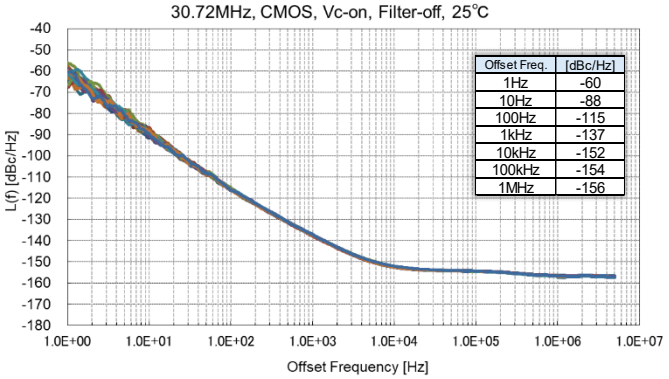

Offset Freq.	[dBc/Hz]
1Hz	-60
10Hz	-88
100Hz	-115
1kHz	-137
10kHz	-152
100kHz	-154
1MHz	-156


30.72MHz, CMOS, Vc-on, Filter-on, 25℃

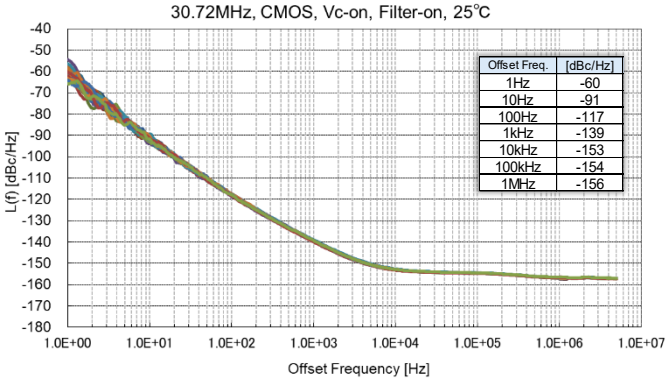

Offset Freq.	[dBc/Hz]
1Hz	-60
10Hz	-91
100Hz	-117
1kHz	-139
10kHz	-153
100kHz	-154
1MHz	-156


40 MHz

40MHz, CMOS, Vc-off, Filter-off, 25℃

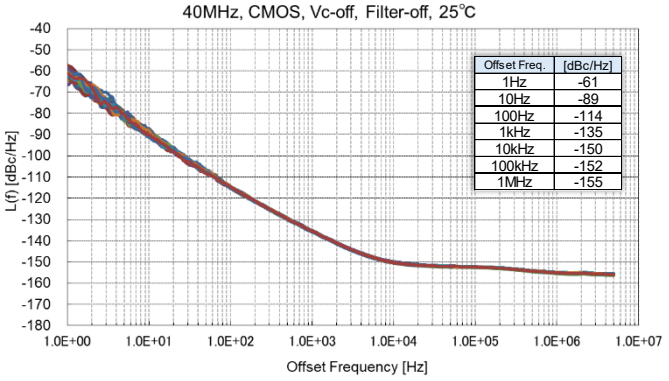


Offset Freq.	[dBc/Hz]
1Hz	-61
10Hz	-89
100Hz	-114
1kHz	-135
10kHz	-150
100kHz	-152
1MHz	-155

40MHz, CMOS, Vc-off, Filter-on, 25℃

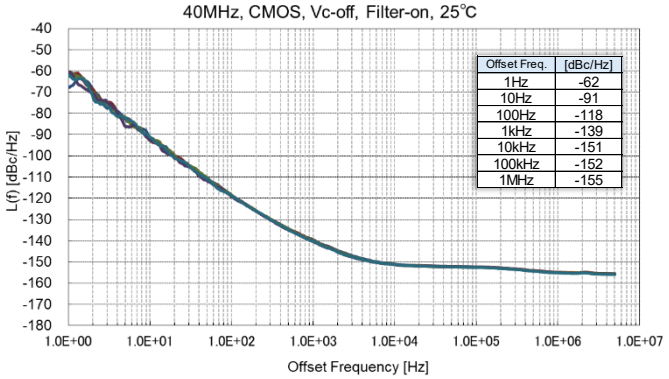


Offset Freq.	[dBc/Hz]
1Hz	-62
10Hz	-91
100Hz	-118
1kHz	-139
10kHz	-151
100kHz	-152
1MHz	-155

40MHz, CMOS, Vc-on, Filter-off, 25℃

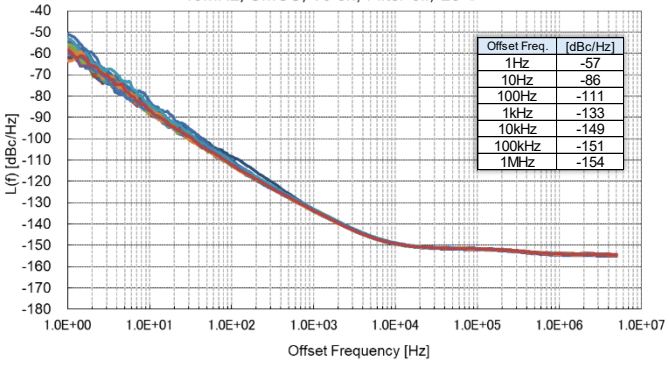


Offset Freq.	[dBc/Hz]
1Hz	-57
10Hz	-86
100Hz	-111
1kHz	-133
10kHz	-149
100kHz	-151
1MHz	-154

40MHz, CMOS, Vc-on, Filter-on, 25℃

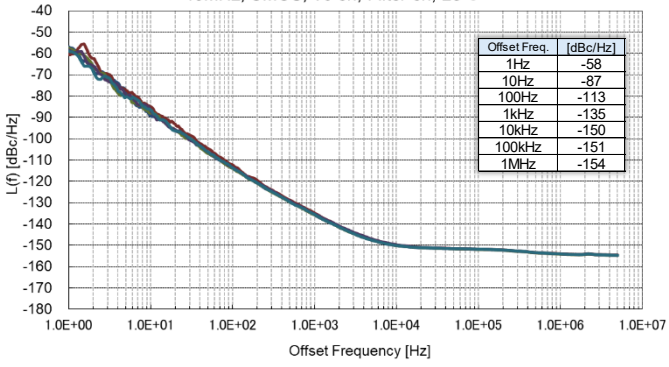


Offset Freq.	[dBc/Hz]
1Hz	-58
10Hz	-87
100Hz	-113
1kHz	-135
10kHz	-150
100kHz	-151
1MHz	-154

3-12) Short term stability [ADEV] (19.2 MHz) TCXO mode

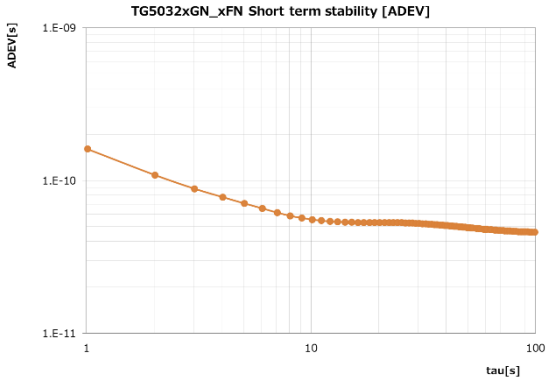


3-13) TDEV (19.2 MHz, Loop BW = 0.1 Hz)

Constant temperature : +25 °C

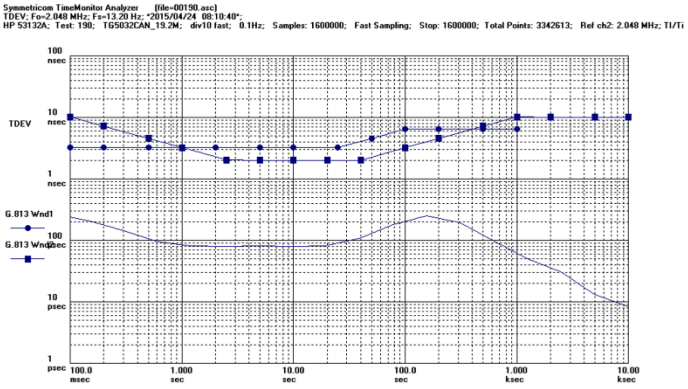


Constant temperature : +70 °C

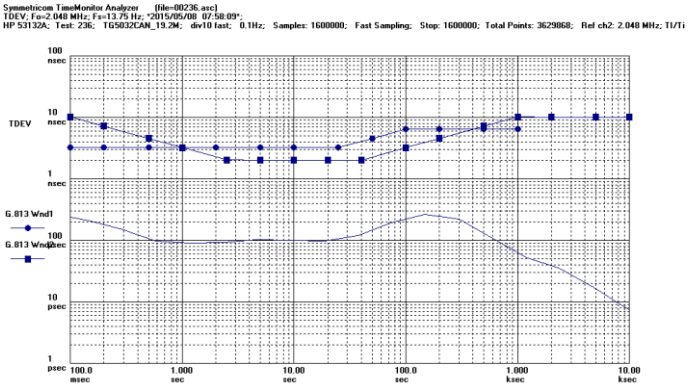


3-14) MTIE (19.2 MHz, Loop BW = 0.1 Hz)

Constant temperature : +25 °C

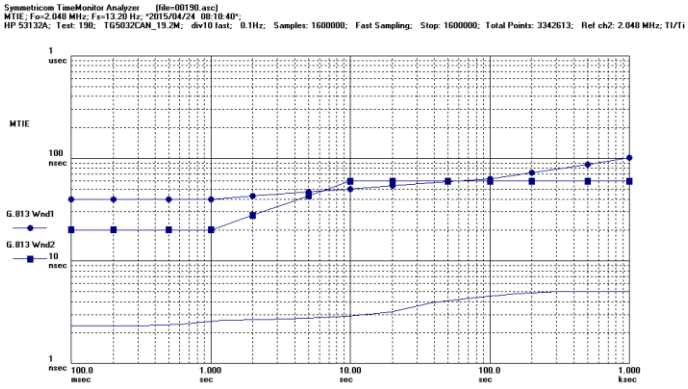

Constant temperature : +70 °C

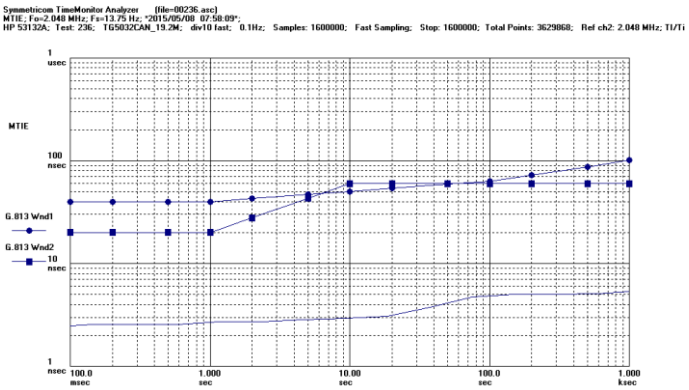


Compliant with G.813 option1 and 2

4. Outline

4-1) Outline dimensions and Pin information

TG5032CGN / SGN

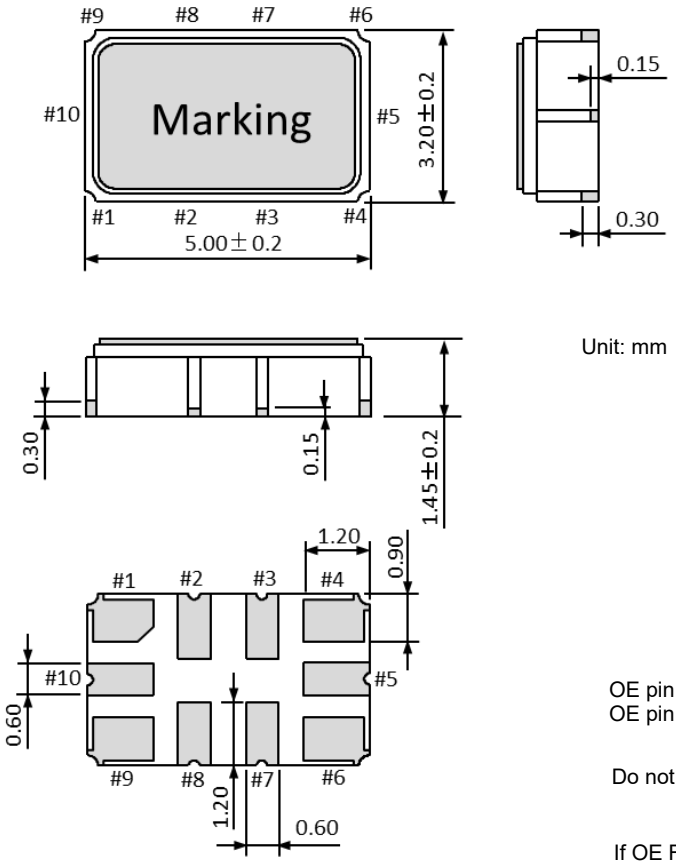

Unit: mm

Pin	Connections	
	VC-TCXO	TCXO
1	Vc	N.C.
2	N.C.	
3	OE	
4	GND	
5	N.C.	
6	OUT	
7	Filter / N.C.	
8	N.C.	
9	V_{CC}	
10	N.C.	

OE pin = "H" or "open": Specified frequency output.
OE pin = "L" : Output is high impedance.

Do not connect “N.C.” pin with any other leads (also mutually)


If OE Function does not use,

We recommended connecting OE (#3 pin) to V_{CC} (#9 pin)


4-2) Soldering pattern

Example of patterning design indicated as follows. In an actual design, please consider mounting density, the reliability of soldering, etc. and check whether performance is optimal.

Soldering pattern of TG5032CGN / SGN (unit : mm)

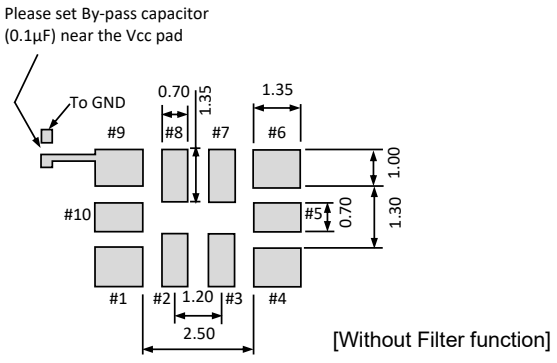

[Without Filter function]

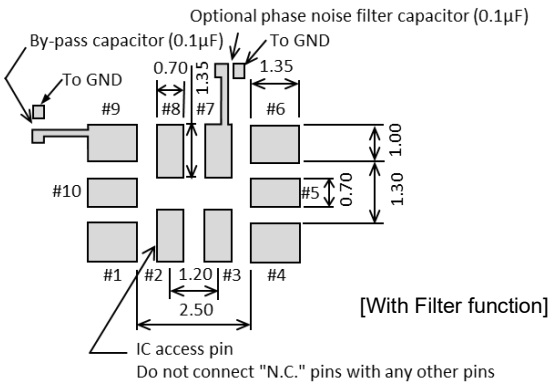


[With Filter function]


To maintain stable operation, provide a 0.1 µF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between V_{CC} - GND).

5. Timing chart

5-1-1) Output waveform (CMOS output)

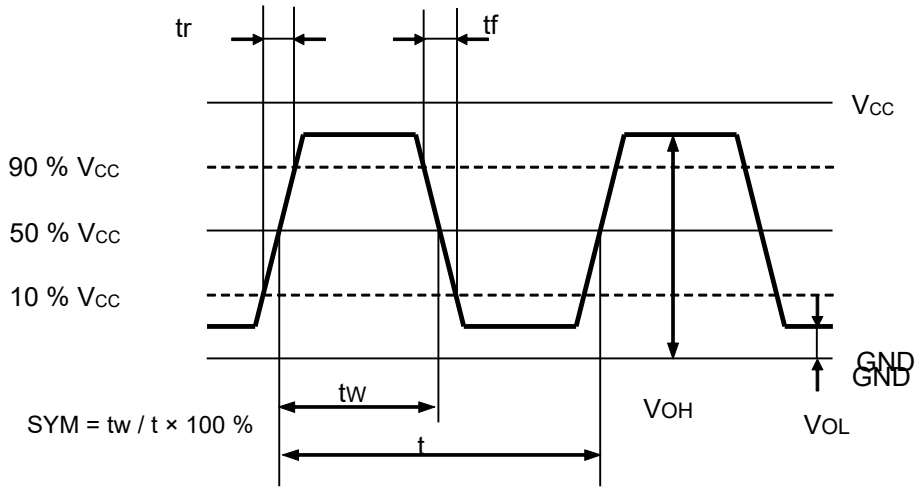


5-1-2) Output waveform (Clipped sine wave output)

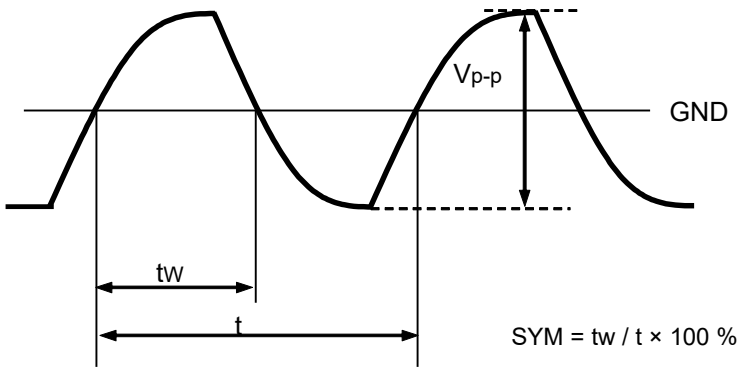

5-2) OE function and timing

OE input level	Oscillation	Outputs
“H” or “Open”	Enable	Enable : specified frequency
“L”	Enable	Disable : high impedance


* OE input voltage must be lower than V_{CC}. Note that rise-up time of OE input voltage must not be shorter than the rise-up time of supply voltage.

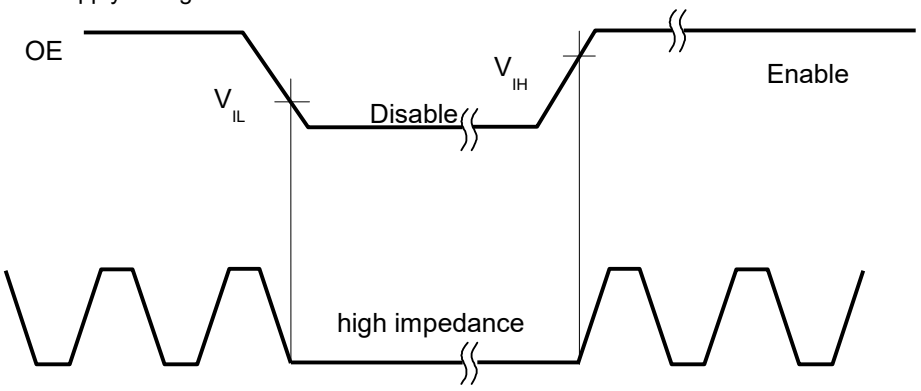


6. Test circuit

6-1) CMOS output for TCXO

1) Waveform Output Load : 15 pF

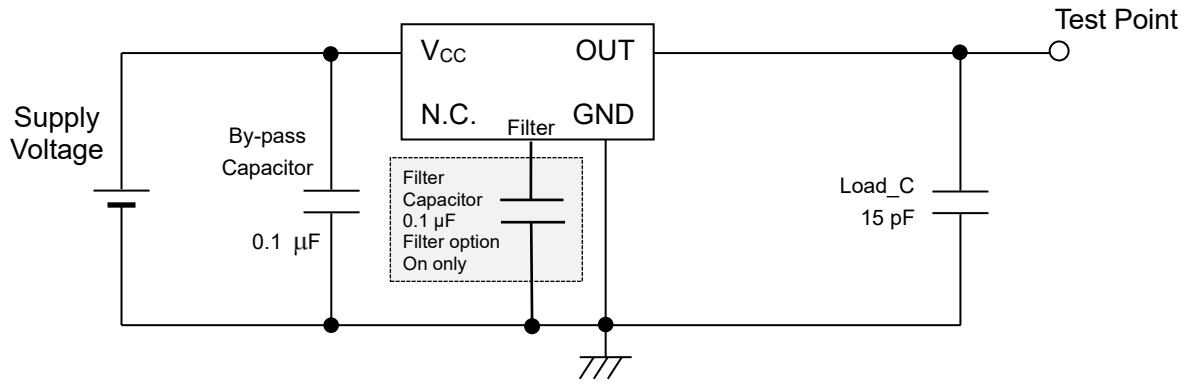

2) Current consumption

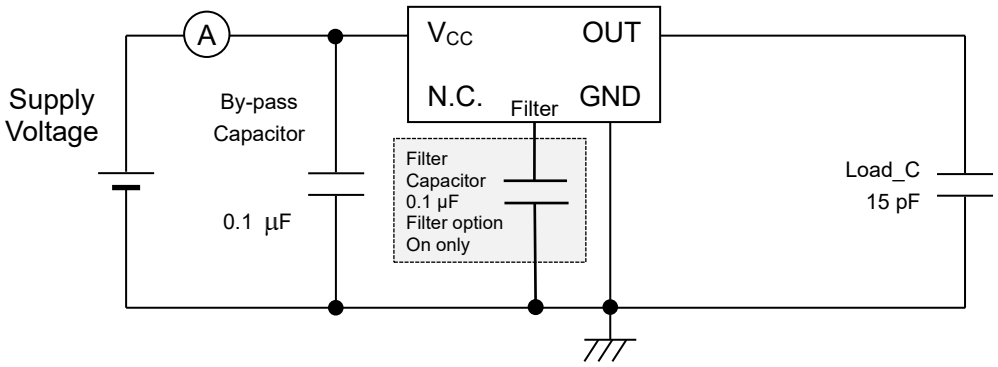


3) Conditions


1. Oscilloscope: Impedance Min. 1 MΩ
   Input capacitance Max. 10 pF
   Band width Min. 300 MHz
2. Load_C includes probe capacitance.
3. A capacitor (By-pass: 0.1 µF) is placed between V_{CC} and GND, and closely to TCXO.
4. Use the current meter whose internal impedance value is small.
5. Power Supply
   Impedance of power supply should be as low as possible.
6. GND pin should be connected to low impedance GND.

6-2) CMOS output for VC-TCXO

1) Waveform Output Load : 15 pF

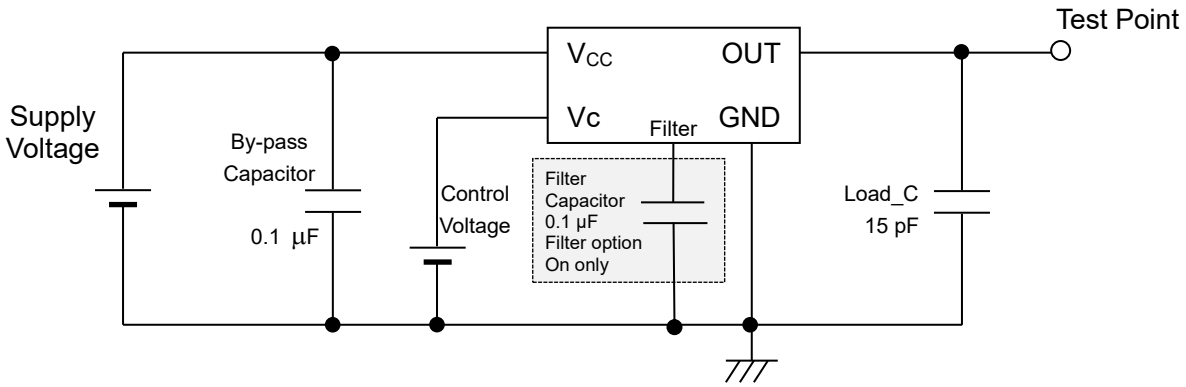

2) Current consumption

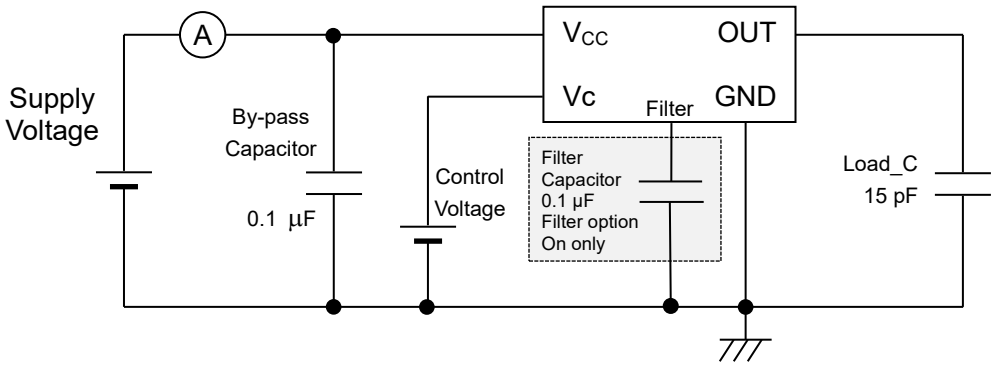


3) Conditions

1. Oscilloscope: Impedance Min. 1 MΩ
   Input capacitance Max. 10 pF
   Band width Min. 300 MHz
2. Load_C includes probe capacitance.
3. A capacitor (By-pass: 0.1 µF) is placed between V_{CC} and GND, and closely to TCXO.
4. Use the current meter whose internal impedance value is small.
5. Power Supply


   Impedance of power supply should be as low as possible.
6. GND pin should be connected to low impedance GND.

6-3) Clipped sine wave output for TCXO

1) Waveform Output Load : 10 kΩ // 10 pF

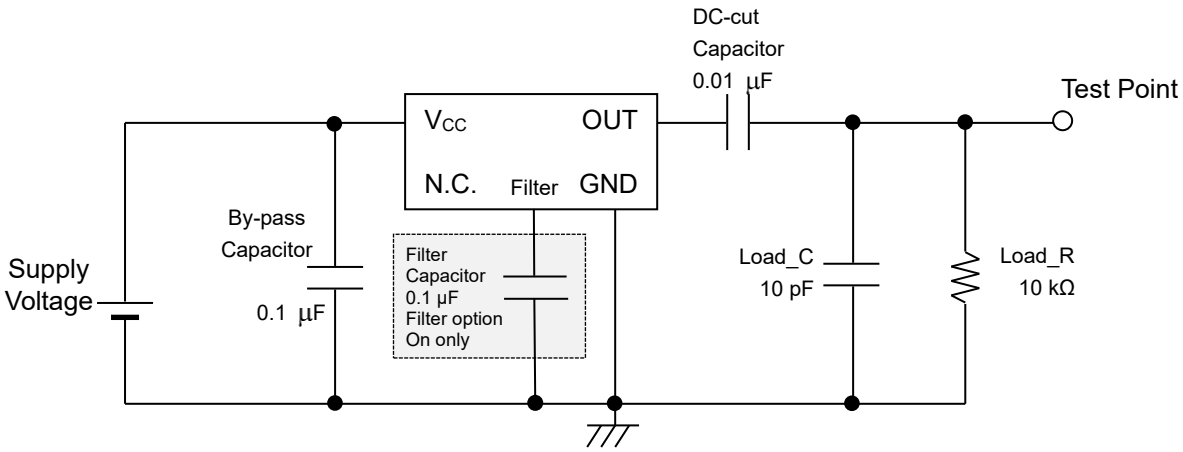

2) Current consumption

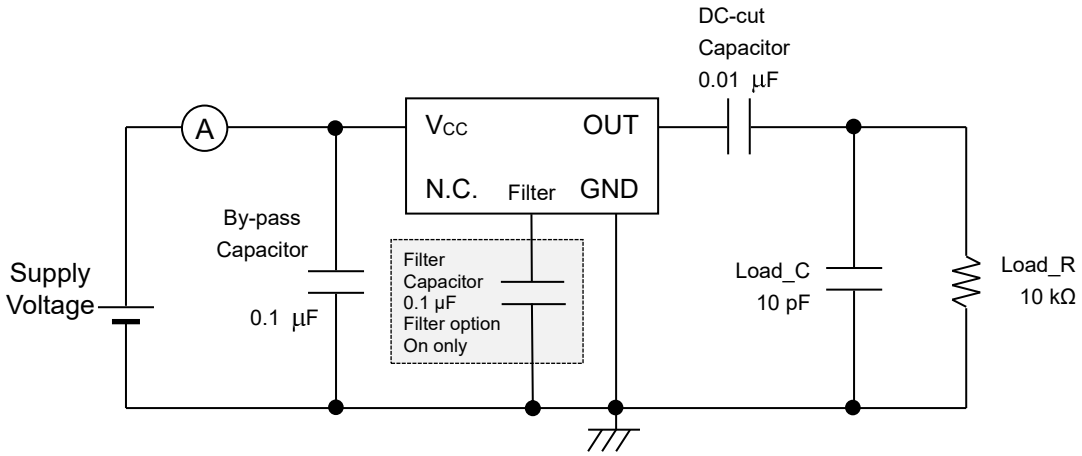


3) Conditions

1. Oscilloscope: Impedance Min. 1 MΩ
   Input capacitance Max. 10 pF
   Band width Min. 300 MHz
2. Load_C includes probe capacitance.
3. A capacitor (By-pass: 0.1 µF) is placed between V_{CC} and GND, and closely to TCXO.
4. Use the current meter whose internal impedance value is small.
5. Power Supply


   Impedance of power supply should be as low as possible.
6. GND pin should be connected to low impedance GND.

6-4) Clipped sine wave output for VC-TCXO

1) Waveform Output Load : 10 kΩ // 10 pF

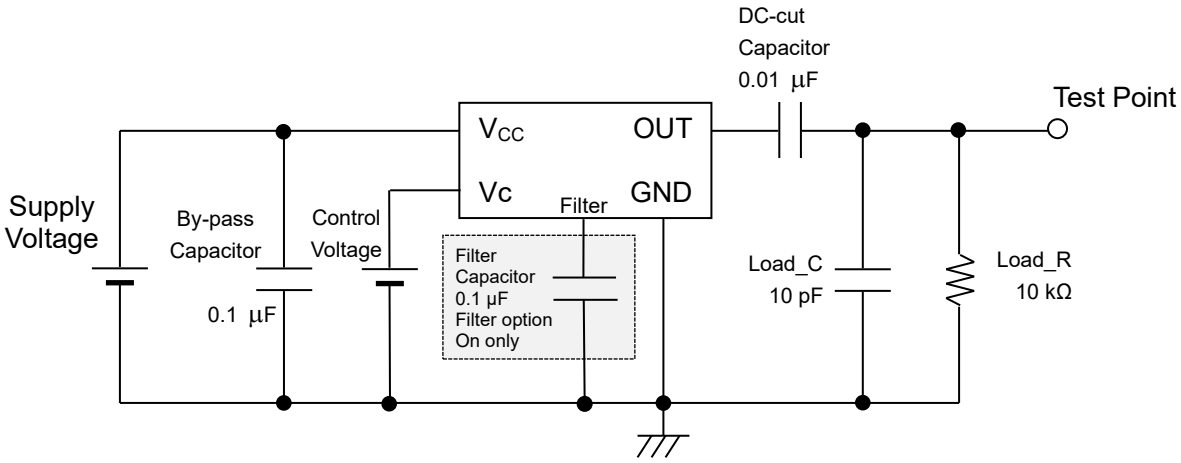


2) Current consumption

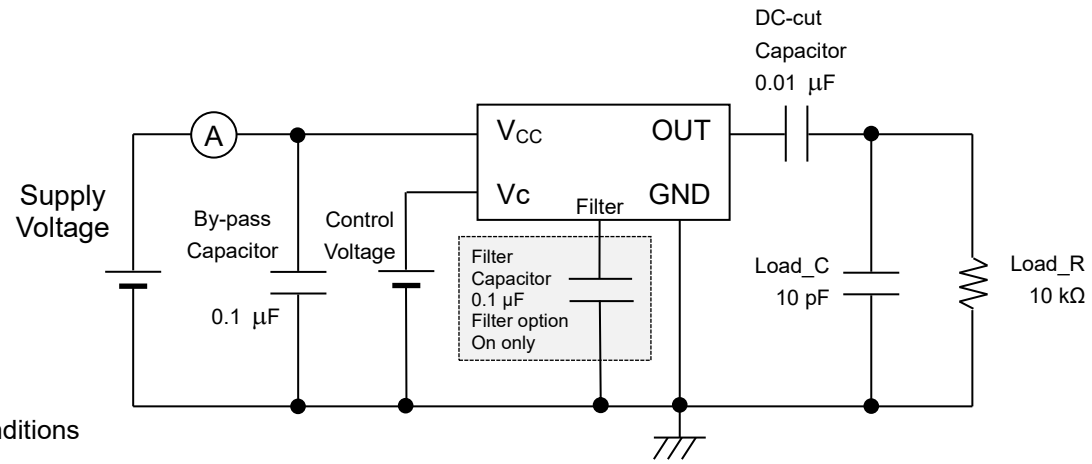

3) Conditions

1. Oscilloscope: Impedance Min. 1 MΩ
   Input capacitance Max. 10 pF
   Band width Min. 300 MHz
2. Load_C includes probe capacitance.
3. A capacitor (By-pass: 0.1 µF) is placed between V_{CC} and GND, and closely to TCXO.
4. Use the current meter whose internal impedance value is small.
5. Power Supply
   Impedance of power supply should be as low as possible.
6. GND pin should be connected to low impedance GND.

7. Reflow profile (follow to IPC / JEDEC J-STD-020D.1)

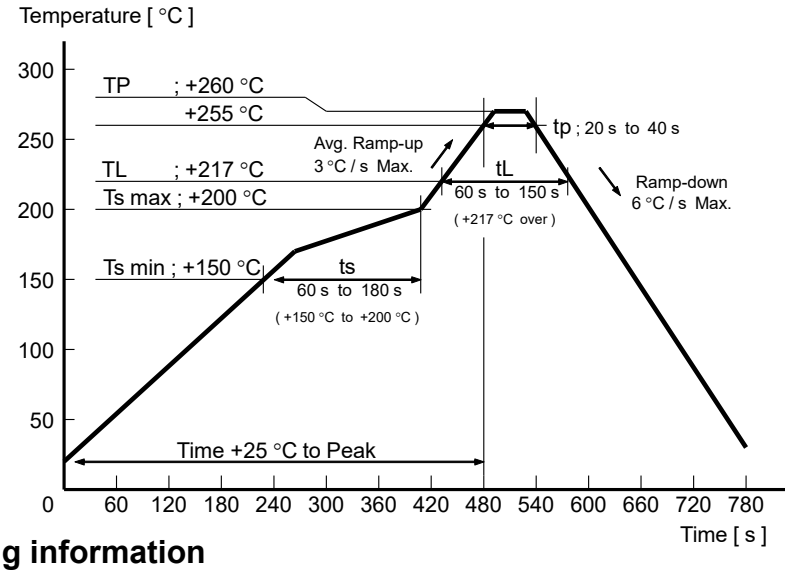

8. Packing information


(8-1) Product number last 2 digits code (00) define Quantity. 1 000 pcs/Reel.

TG5032CGN: X1G005231xxxx00 (Please contact Epson for details of number xxxx)
TG5032SGN: X1G005241xxxx00

(8-2) Taping specification Subject to EIA-481 IEC-60286 JIS C0806

(1) Tape dimensions


Material of the Carrier Tape: PS conduct / Material of the Top Tape: PET

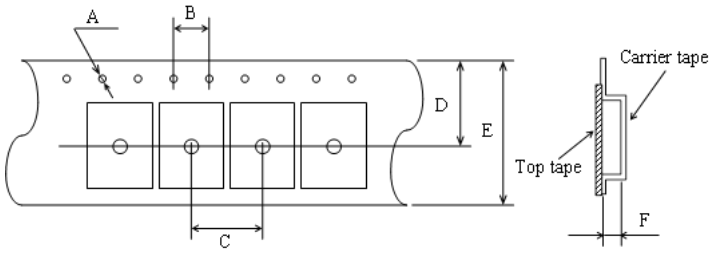

Symbol	A	B	C	D	E	F
Value	ϕ1.5	4.0	8.0	7.25	12.0	1.7

Unit : mm

(2) Reel dimensions Material of the reel: Conductive polystyrene

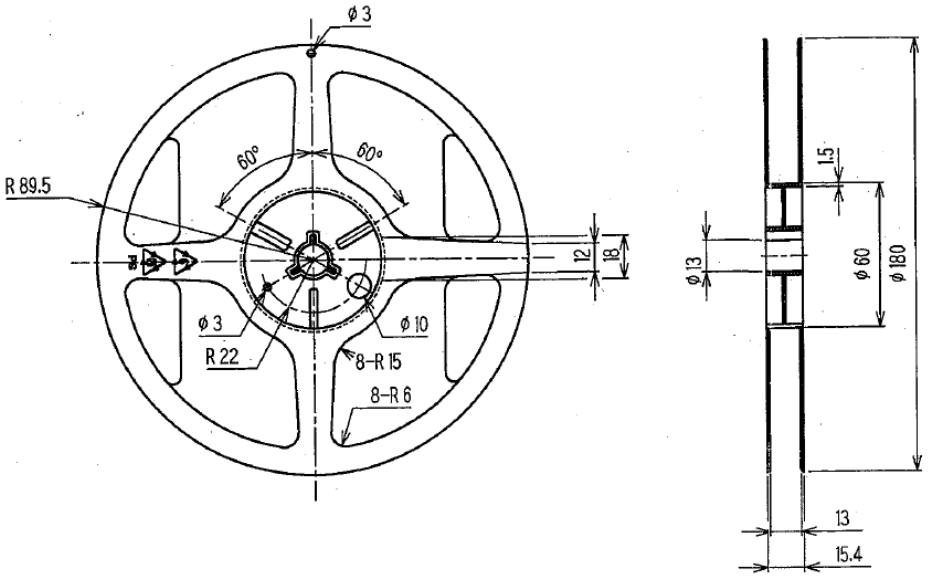

9. Moisture Sensitivity Level, Electro-Static Discharge

(9-1) Moisture Sensitivity Level (MSL)

Parameter	Specifications	Conditions
MSL	LEVEL1	JEDEC J-STD-020D

(9-2) Electro-Static Discharge (ESD)

Parameter	Specifications	Conditions
Human Body Model (HBM)	2 000 V Min	IEC 60749-26 Ed.2.0:2006(b), 100 pF, 1.5 kΩ, 3 times
Machine Model (MM)	200 V Min	IEC 60749-27 Ed.2.0:2006(b), 200 pF, 0 Ω, 1 time

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

10. Handling precautions

Prior to using this product, please carefully read the section entitled “Precautions” on our Web site (https://www5.epsondevice.com/en/information/#precaution) for instructions on how to handle and use the product properly to ensure optimal performance of the product in your equipment.
Before using the product under any conditions other than those specified therein, please consult with us to verify and confirm that the performance of the product will not be negatively affected by use under such conditions.

In addition to the foregoing precautions, in order to avoid the deteriorating performance of the product, we strongly recommend that you DO NOT use the product under ANY of the following conditions:

(1) Do not expose this product to excessive mechanical shock or vibration.
(2) This product can be damaged by mechanical shock during the soldering process depending on the equipment used, process conditions, and any impact forces experienced. Always follow appropriate procedures, particularly when changing the assembly process in anyway and be sure to follow applicable process qualification standards before starting production.
(3) These devices are sensitive to ESD, please use appropriate precautions during handling, assembly, test, shipment, and installation.
(4) This product contains semiconductor content that should not be exposed to electromagnetic waves.
(5) The use of ultrasonic technology for cleaning, bonding, etc. can damage the X’tal unit inside this product. Please carefully check for this consideration before using ultrasonic equipment for volume production with this product.
(6) Noise and ripple on the power supply may have undesirable affects on operation and cause degradation of phase noise characteristics. Evaluate the operation of this device with appropriate power supplies carefully before use.
(7) When applying power, ensure that the supply voltage increases monotonically for proper operation. On power down, do not reapply power until the supplies, bypass capacitors, and any bulk capacitors are completely discharged since that may cause the unit to malfunction.
(8) Aging specifications are estimated from environmental reliability tests and expected frequency variation over time. They do not provide a guarantee of aging over the product lifecycle.
(9) The metal cap on top of the device is directly connected to the GND terminal (pin #2). Take necessary precautions to prevent any conductor not at ground potential from contacting the cap as that could cause a short circuit to GND.
(10) Do not route any signal lines, supply voltage lines, or GND lines underneath the area where the oscillators are mounted including any internal layers and on the opposite side of the PCB. To avoid any issues due to interference of other signal lines, please take care not to place signal lines near the product as this may have an adverse affect on the performance of the product.
(11) A bypass capacitor of the recommended value(s) must be connected between the V_{CC} and GND terminals of the product. Whenever possible, mount the capacitor(s) on the same side of the PCB and as close to the product as possible to keep the routing traces short.
(12) Power supply connections to V_{CC} and GND pins should be routed as thick as possible while keeping the high frequency impedance low in order to get the best performance.
(13) The use of a filter or similar element in series with the power supply connections to protect from electromagnetic radiation noise may increase the high frequency impedance of the power supply line and may cause the oscillator to not operate properly. Please verify the design to ensure sufficient operational margin prior to use.
(14) Keep PCB routing from the output terminal(s) to the load as short as possible for best performance.
(15) Do not short the output to GND as that will damage the product. Always use with an appropriate load resistor connected.
(16) Product failures during the warranty period only apply when the product is used according to the recommended operating conditions described in the specifications. Products that have been opened for analysis or damaged will not be covered. It is recommended to store and use in normal temperature and humidity environments described in the specifications to ensure frequency accuracy and prevent moisture condensation. If the product is stored for more than one year, please confirm the pin solderability prior to use.
(17) If the oscillation circuit is exposed to condensation, the frequency may change or oscillation may stop. Do not use in any conditions where condensation occurs.
(18) Do not store or use the product in an environment where it can be exposed to chemical substances that are corrosive to metal or plastics such as salt water, organic solvents, chemical gasses, etc. Do not use the product when it is exposed to sunlight, dust, corrosive gasses, or other materials for long periods of time.
(19) When using water-soluble solder flux make sure to completely remove the flux residue after soldering. Pay particular attention when the residues contain active halogens which will negatively affect the product and its performance.

►Explanation of the mark that are using it for the catalog

	►Pb free.
	►Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
	►Designed for automotive general equipment.
	►Designed for automotive applications related to driving and safety.

NOTICE：PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT

1. The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation (“Epson”) for the latest information and be always sure to check the latest information published on Epson’s official web sites and resources.
2. This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson’s prior consent.
3. Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties’ intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
5. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for the purposes of military weapons development (e.g. mass destruction weapons), military use, or any other military applications. If exporting Epson products or our associated technologies, please be sure to comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A (EAR) and other export-related laws and regulations in Japan and any other countries and to follow their required procedures.
6. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
7. For more details or other concerns about this document, please contact our sales representative.
8. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

●Disclaimer

1. Epson products are designed for use in general electronic equipment applications that do not require extremely high reliability or safety.

2. Epson does not represent or warrant that its products will not cause a failure for any particular application, except for cases where the failure is a direct result caused by defects in materials and workmanship of this product. If a product fails due to defects in materials and workmanship, to the maximum extent permitted by law, we will, at our sole discretion, refund or replace the affected product.

3. When products for used directly or indirectly in certain devices or applications (ex. Nuclear power, aerospace, infrastructure facilities, medical equipment, etc.) which are connected to or affect safety of human life or property, Customer is solely responsible for determining if the products and respective specifications are suitable for the intended use in particular customer applications.
Customer shall implement necessary and proper safety design and measures (including redundant design, malfunction prevention design, etc.) to ensure reliability and safety before using the products in/with customer’s Equipment.

4. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed. Furthermore, any defects caused by this are not covered by the warranty.

©Seiko Epson Corporation 2025