

ULN2001, ULN2002
ULN2003, ULN2004

Seven Darlington array

Datasheet - production data



DIP-16L
Plastic DIP-16L



SO-16
(Narrow)

Features

- Seven Darlingtons per package
- Output current 500 mA per driver (600 mA peak)
- Output voltage 50 V
- Integrated suppression diodes for inductive loads
- Outputs can be paralleled for higher current
- TTL/CMOS/PMOS/DTL compatible inputs
- Inputs pinned opposite outputs to simplify layout

Description

The ULN2001, ULN2002, ULN2003 and ULN 2004 are high voltage, high current Darlington arrays each containing seven open collector Darlington pairs with common emitters. Each channel rated at 500 mA and can withstand peak currents of 600 mA. Suppression diodes are included for inductive load driving and the inputs are pinned opposite the outputs to simplify board layout.

The versions interface to all common logic families: ULN2001 (general purpose, DTL, TTL, PMOS, CMOS); ULN2002 (14 - 25 V PMOS); ULN2003 (5 V TTL, CMOS); ULN2004 (6 - 15 V CMOS, PMOS).

These versatile devices are useful for driving a wide range of loads including solenoids, relays DC motors, LED displays filament lamps, thermal printheads and high power buffers.

The ULN2001A/2002A/2003A and 2004A are supplied in 16 pin plastic DIP packages with a copper leadframe to reduce thermal resistance. They are available also in small outline package (SO-16) as ULN2001D1/2002D1/2003D1/ 2004D1.

This is information on a product in full production. www.st.com

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
微信扫码咨询客服

Contents

1 Diagram 3

2 Pin configuration 4

3 Maximum ratings 5

4 Electrical characteristics 6

5 Test circuits 7

6 Typical performance characteristics 9

7 Package information 11

7.1 DIP-16L package information 11

7.2 Plastic DIP-16L package information 13

7.3 SO-16 narrow package information 15


8 Order code 17

9 Revision history 18

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

1 Diagram

Figure 1. Schematic diagram

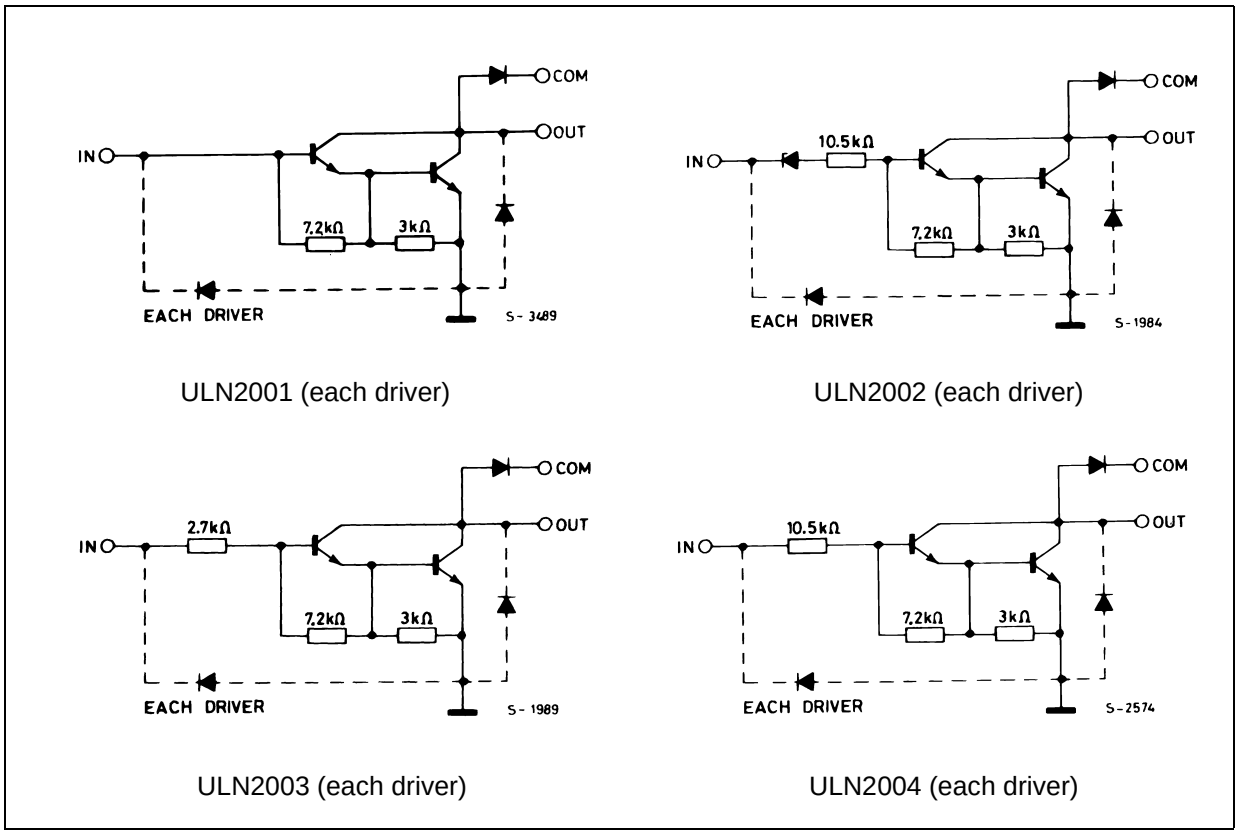

ULN2001 (each driver)

ULN2002 (each driver)


ULN2003 (each driver)

ULN2004 (each driver)

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

2 Pin configuration

Figure 2. Pin connections (top view)

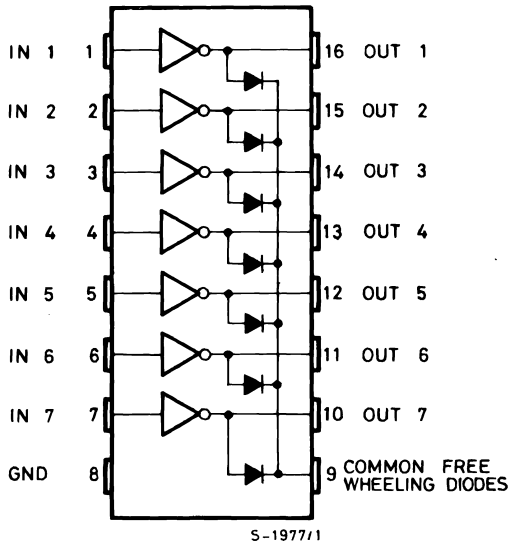

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

3 Maximum ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_O	Output voltage	50	V
V_I	Input voltage (for ULN2002A/D - 2003A/D - 2004A/D)	30	V
I_C	Continuous collector current	500	mA
I_B	Continuous base current	25	mA
T_A	Operating ambient temperature range	- 40 to 85	°C
T_{STG}	Storage temperature range	- 55 to 150	°C
T_J	Junction temperature	150	°C

Table 2. Thermal data

Symbol	Parameter	DIP-16	SO-16	Unit
R_{thJA}	Thermal resistance junction-ambient, Max.	70	120	°C/W

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

4 Electrical characteristics

T_A = 25 °C unless otherwise specified.

Table 3. Electrical characteristics

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
I_{CEX}	Output leakage current	V_{CE} = 50 V, (*Figure 3.*)			50	µA
		T_A = 85 °C, V_{CE} = 50 V (*Figure 3.*)			100	
		T_A = 85 °C for ULN2002, V_{CE} = 50 V, V_I = 6 V (*Figure 4.*)			500	
		T_A = 85 °C for ULN2002, V_{CE} = 50 V, V_I = 1V (*Figure 4.*)			500	
$V_{CE(SAT)}$	Collector-emitter saturation voltage (*Figure 5.*)	I_C = 100 mA, I_B = 250 µA		0.9	1.1	V
		I_C = 200 mA, I_B= 350 µA		1.1	1.3	
		I_C = 350 mA, I_B= 500 µA		1.3	1.6	
$I_{I(ON)}$	Input current (*Figure 6.*)	for ULN2002, V_I = 17 V		0.82	1.25	mA
		for ULN2003, V_I = 3.85 V		0.93	1.35	
		for ULN2004, V_I = 5 V		0.35	0.5	
		V_I = 12 V		1	1.45	
$I_{I(OFF)}$	Input current (*Figure 7.*)	T_A = 85 °C, I_C = 500 µA	50	65		µA
$V_{I(ON)}$	Input voltage (*Figure 8.*)	V_{CE}= 2 V, for ULN2002 I_C = 300 mA for ULN2003 I_C = 200 mA I_C = 250 mA I_C = 300 mA for ULN2004 I_C = 125 mA I_C = 200 mA I_C = 275 mA I_C = 350 mA			13 2.4 2.7 3 5 6 7 8	V
h_{FE}	DC Forward current gain (*Figure 5.*)	for ULN2001, V_{CE} = 2 V, I_C = 350 mA	1000			
C_I	Input capacitance			15	25	pF
t_{PLH}	Turn-on delay time	0.5 V_I to 0.5 V_O		0.25	1	µs
t_{PHL}	Turn-off delay time	0.5 V_I to 0.5 V_O		0.25	1	µs
I_R	Clamp diode leakage current (*Figure 9.*)	V_R = 50 V			50	µA
		T_A = 85 °C, V_R = 50 V			100	
V_F	Clamp diode forward voltage (*Figure 10.*)	I_F = 350 mA		1.7	2	V

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

5 Test circuits

Figure 3. Output leakage current

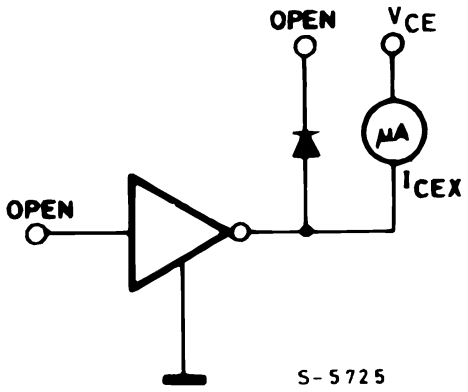


Figure 4. Output leakage current (for ULN2002 only)

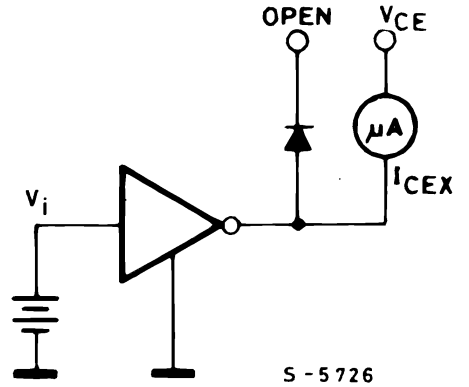


Figure 5. Collector-emitter saturation voltage

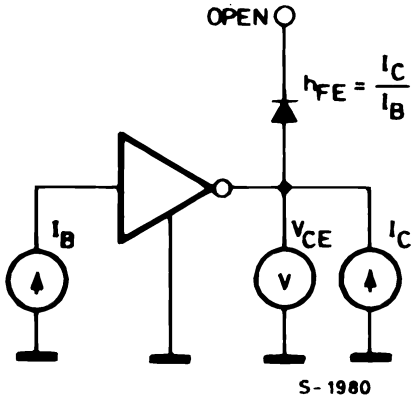


Figure 6. Input current (ON)

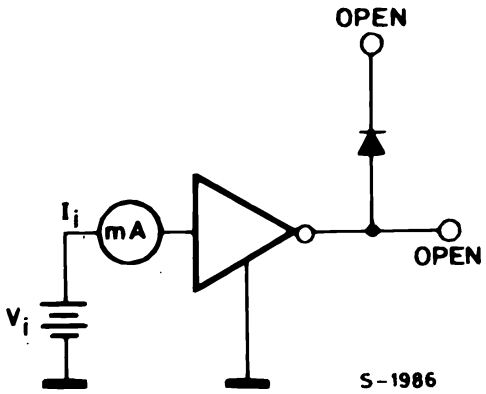


Figure 7. Input current (OFF)


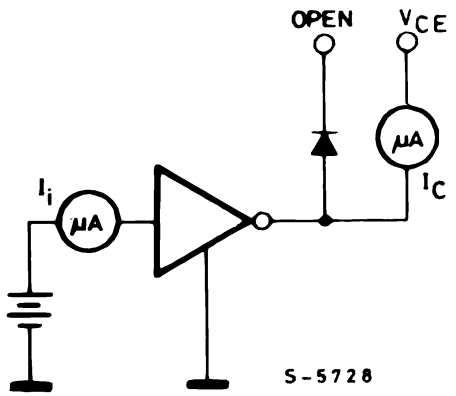


Figure 8. Input voltage

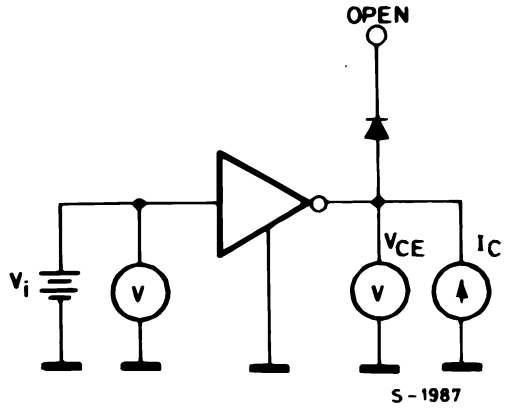

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 9. Clamp diode leakage current


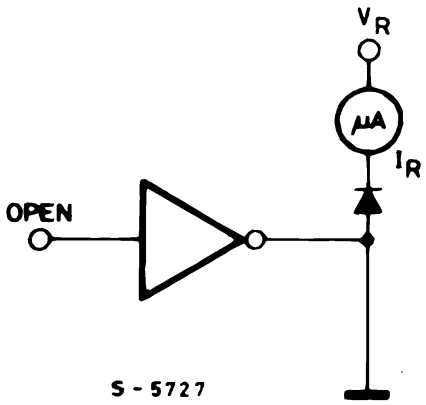


Figure 10. Clamp diode forward voltage

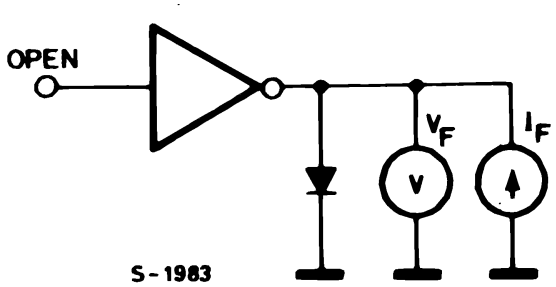

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

6 Typical performance characteristics

Figure 11. Collector current vs. saturation voltage (T_J = 25 °C)

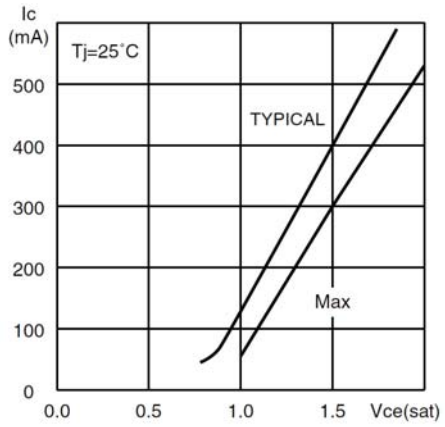


Figure 12. Collector current vs. saturation voltage

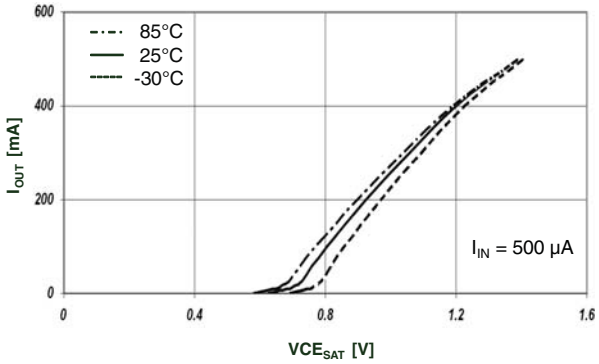


Figure 13. Input current vs. input voltage

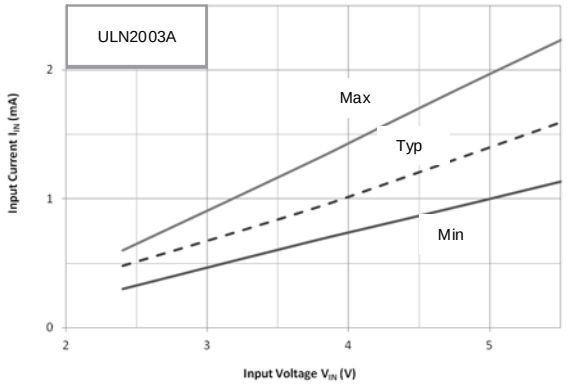


Figure 14. Input current vs. input voltage (Ta = 25 °C)

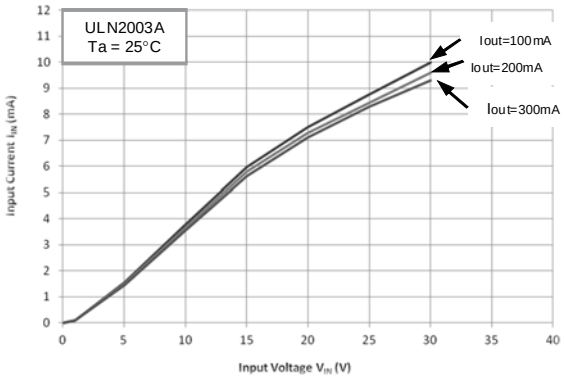


Figure 15. Collector current vs. input current


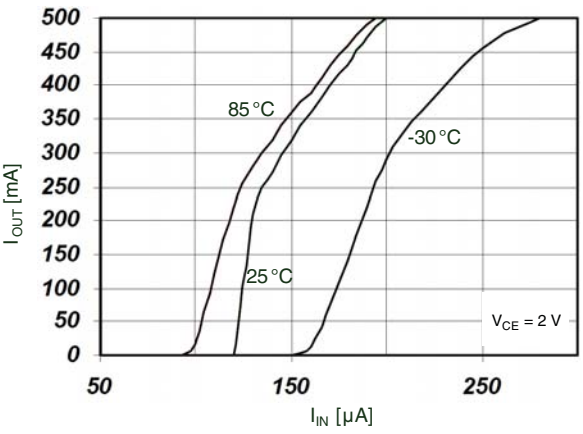


Figure 16. h_{FE} vs. output current

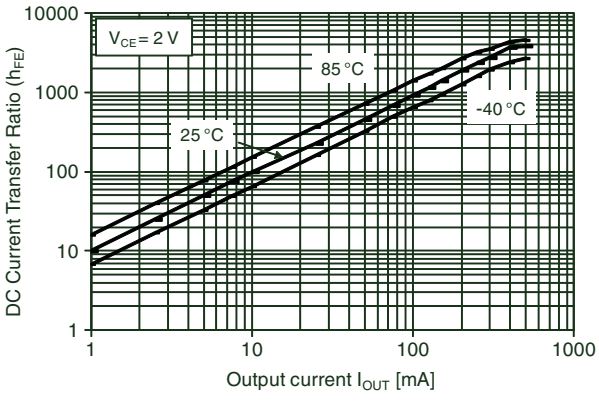

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Figure 17. Peak collector current vs. duty cycle (DIP-16)


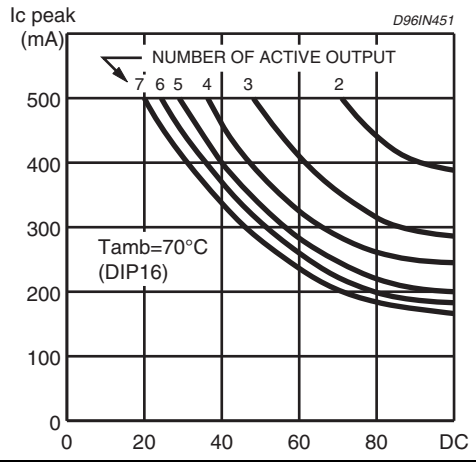


Figure 18. Peak collector current vs. duty cycle (SO-16)

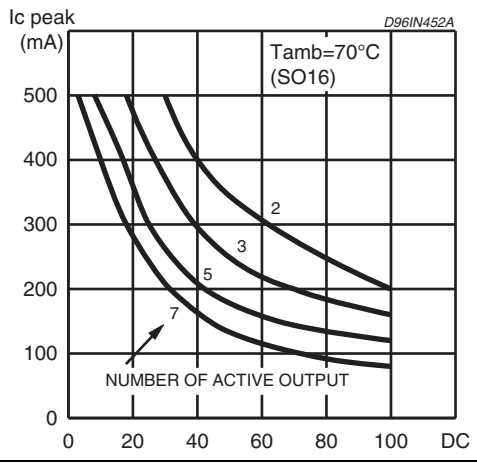


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: *www.st.com*. ECOPACK® is an ST trademark.

7.1 DIP-16L package information

Figure 19. DIP-16L package outline

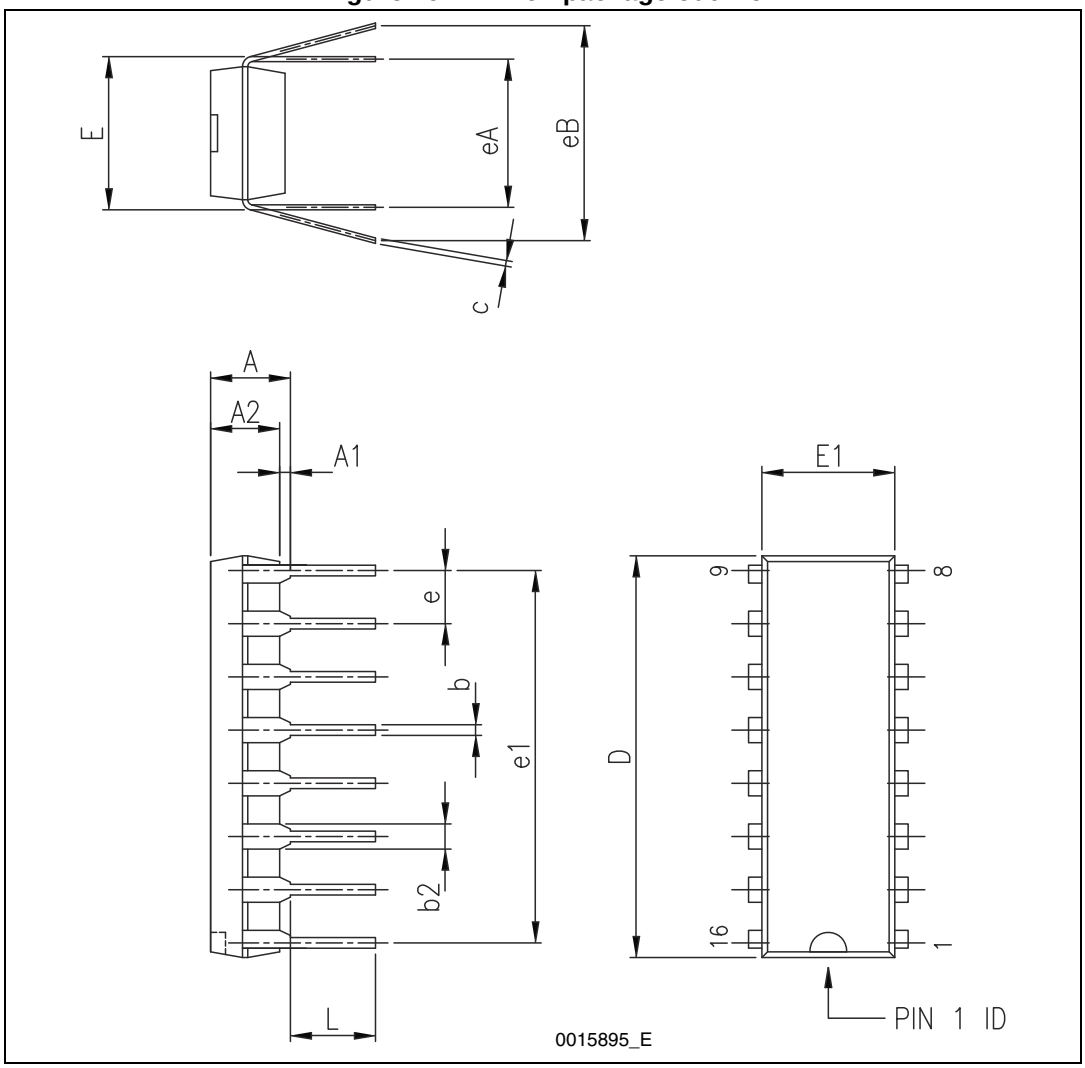

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com


Table 4. DIP-16L mechanical data

Dim.	mm.		
	Min.	Typ.	Max.
A			5.33
A1	0.38		
A2	2.92	3.30	4.95
b	0.36	0.46	0.56
b2	1.14	1.52	1.78
c	0.20	0.25	0.36
D	18067	19.18	19.69
E	7.62	7.87	8.26
E1	6.10	6.35	7.11
e		2.54	
e1		17.78	
eA		7.62	
eB			10.92
L	2.92	3.30	3.81

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7.2 Plastic DIP-16L package information

Figure 20. Plastic DIP-16L package outline

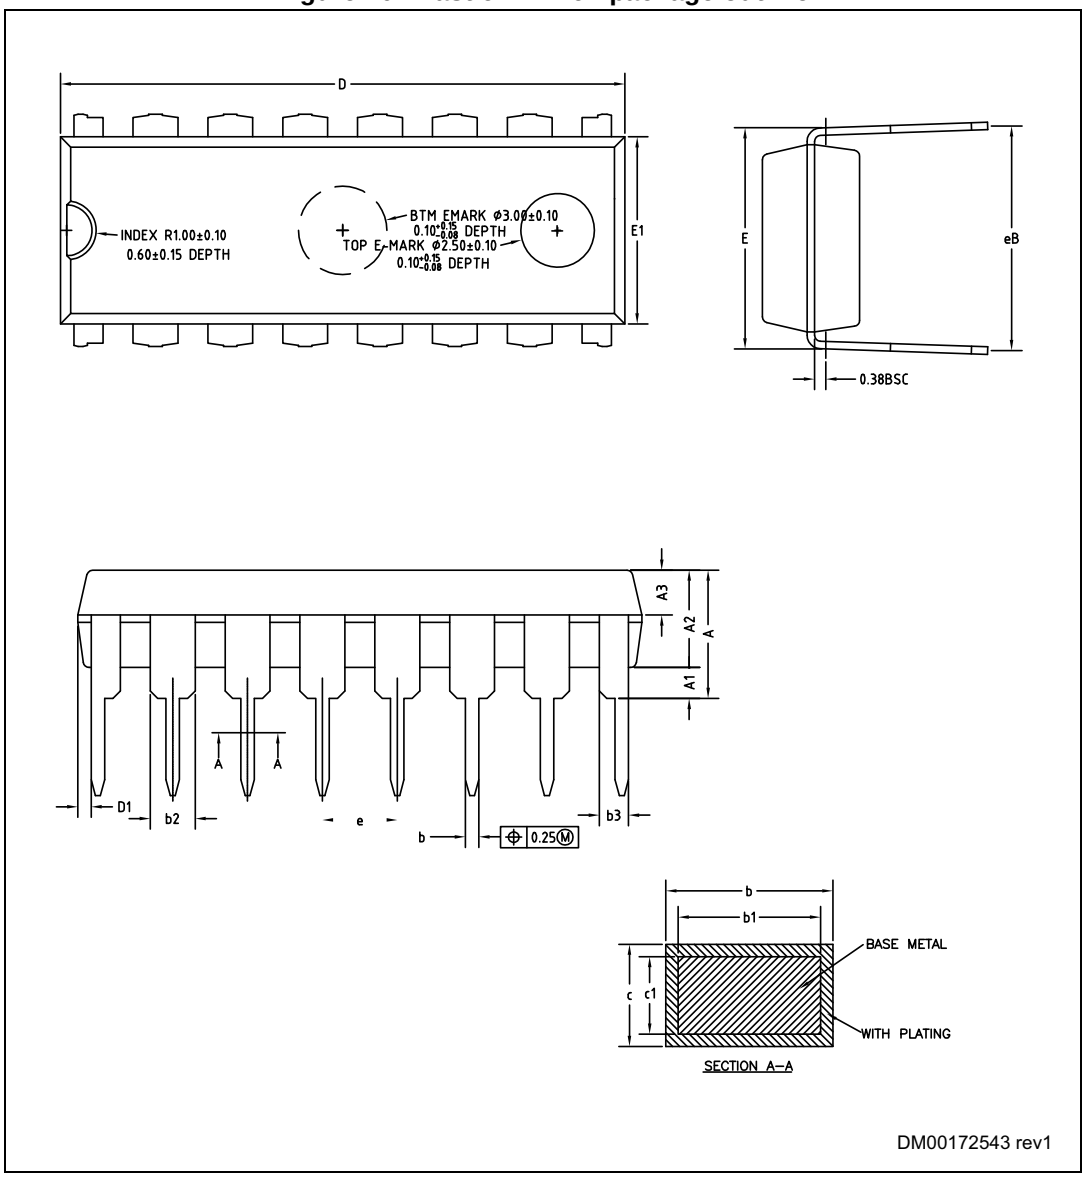

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 5. Plastic DIP-16L mechanical data


Dim.	mm		
	Min.	Typ.	Max.
A			4.90
A1	0.60		
A2	3.20	3.30	3.40
A3	1.42	1.52	1.62
b	0.38		0.55
b1	0.38	0.46	0.51
b2	1.42	1.52	1.62
b3	0.89	0.99	1.09
c	0.25		0.30
c1	0.24	0.25	0.26
D	19.05	19.15	19.25
D1	0.13		
E	7.25	7.50	7.75
E1	6.25	6.35	6.45
e	2.44	2.54	2.64
eB	7.27	7.62	7.97
L	3.05	3.30	3.55

Note: "D" and "E1" dimensions do not include mold flash or protusions. Mold flash or protusions shall not exceed 0.25 mm.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

7.3 SO-16 Narrow package information

Figure 21. SO-16 package outline

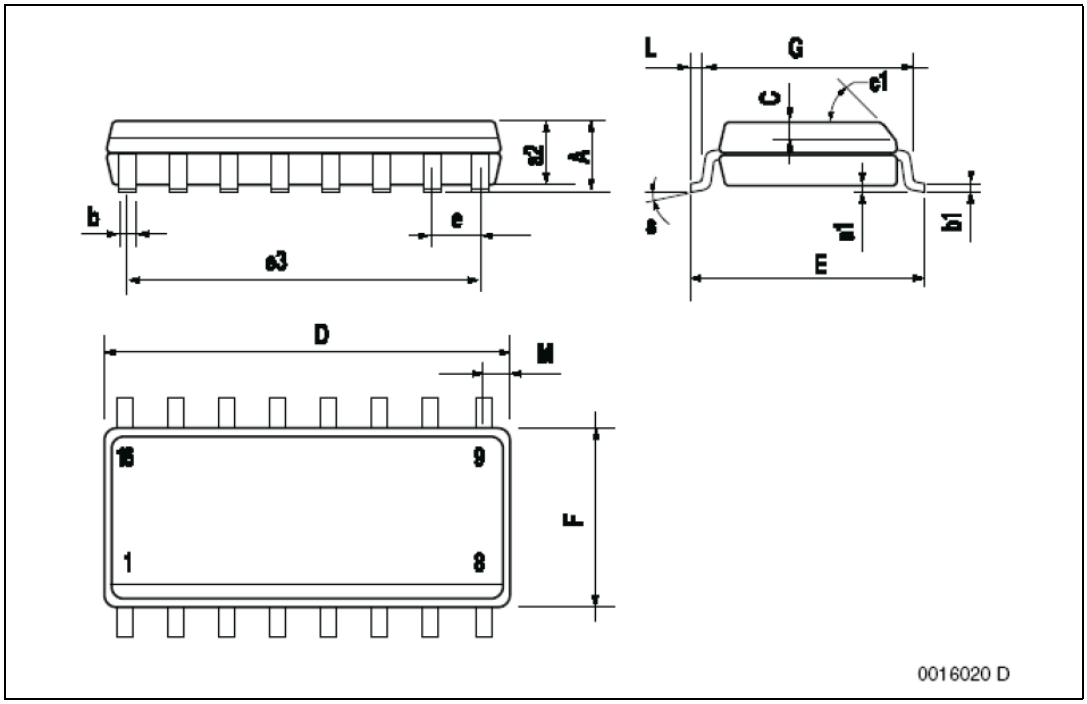

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

Table 6. SO-16 Narrow mechanical data

Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.009
a2			1.6			0.063
b	0.35		0.46	0.014		0.018
b1	0.19		0.25	0.007		0.010
C		0.5			0.020	
c1			45°	(typ.)		
D(1)	9.8		10	0.386		0.394
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		8.89			0.350	
F(1)	3.8		4.0	0.150		0.157
G	4.60		5.30	0.181		0.208
L	0.4		1.27	0.150		0.050
M			0.62			0.024
S	8° (max.)					

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

8 Order code

Table 7. Order code

Part number	Package
ULN2001A	DIP-16
ULN2002A	DIP-16
ULN2003A	DIP-16
ULN2004A	DIP-16
ULN2003AA	Plastic DIP-16L
ULN2001D1013TR	SO-16 in tape and reel
ULN2002D1013TR	SO-16 in tape and reel
ULN2003D1013TR	SO-16 in tape and reel
ULN2004D1013TR	SO-16 in tape and reel

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

9 Revision history

Table 8. Revision history

Date	Revision	Changes
05-Dec-2006	5	Order code updated and document reformatted.
28-Aug-2007	6	Added *Table 1* in cover page.
07-May-2012	7	Modified: *Figure 12 on page 9*. Added: *Figure 13*, *14*, *15* and *Figure 16 on page 9*.
01-Jun-2012	8	Updated: DIP-16L package mechanical data *Table 4 on page 12* and *Figure 19 on page 11*.
22-Jul-2015	9	Added Plastic DIP16-L package. Removed Device summary table. Updated *Table 7: Order code*. Added *Section 7.2: Plastic DIP-16L package information*. Minor text changes.

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com