kHz Range Crystal unit FC1610AN

SEIKO EPSON CORPORATION

Product name FC1610AN 32.768000 kHz 12.5 +10.0-10.0

Product Number / Ordering code X1A0001210012xx

Please refer to the 5.Packing information about xx (last 2 digits)

Complies with EU RoHS directive

Reference weight Typ. 3 mg


## 1.Absolute maximum ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions / Remarks |
|---|---|---|---|---|---|---|
| Storage temperature | T_stg | -55 | - | 125 | ºC | Storage as single product |
| Maximum drive level | GL | - | - | 0.5 | µW | |


## 2.Specificatoins(characteristics)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions / Remarks |
|---|---|---|---|---|---|---|
| Nominal frequency | f_nom | - | 32.768 | - | kHz | |
| Operating temperature | T_use | -40 | - | 85 | ºC | |
| Level of drive | DL | — | 0.1 | 0.5 | µW | |
| Frequency tolerance | f_tol | -10 | - | 10 | x $10^{-6}$ | +25ºC DL=0.1µW |
| Turnover temperature | Ti | 20 | 25 | 30 | ºC | |
| Parabolic coefficient | B | - | - | -0.04 | x $10^{-6}$/ºC$^2$ | |
| Load capacitance | CL | - | 12.5 | - | pF | |
| Motional resistance (ESR) | R1 | - | - | 90 | k Ω | |
| Motional capacitance | C1 | - | 6 | - | fF | |
| Shunt capacitance | C0 | - | 1.2 | - | pF | |
| Motional inductance | L1 | - | 4 | - | kH | |
| Frequency aging | f_age | -3 | - | 3 | x$10^{-6}$ /yea | @+25ºC, First year |

## 3.External dimensions (Unit: mm)

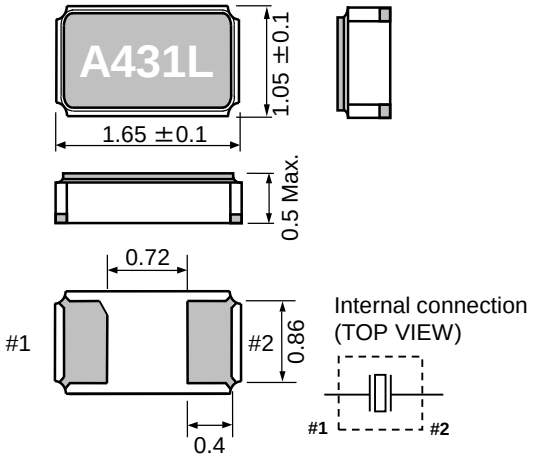


## 4.Footprint(Recommended) (Unit: mm)




∗Do not design any circuit patterns in the shaded area.

## 5.Packing information

[ 1 ]Product number last 2 digits code (xx) description The recommended code is "00"

X1A0001210012xx

| Code | Condition | Code | Condition |
|---|---|---|---|
| 01 | Any Q'ty vinyl bag(Tape cut) | 16 | 3000pcs / Reel |
| 11 | Any Q'ty / Reel | 00 | 5000pcs / Reel |
| 12 | 250pcs / Reel | | |
| 14 | 1000pcs / Reel | | |


深圳市满度科技有限公司
Web:www.manduic.com
Tel:150-1290-5940
Email:sales@manduic.com
微信扫码咨询客服

[ 2 ] Taping specification


Subject to EIA-481 & IEC-60286

(1) Tape dimensions TE1204L

Material of the Carrier Tape : PS

Material of the Top Tape : PET+PE


Unit: mm

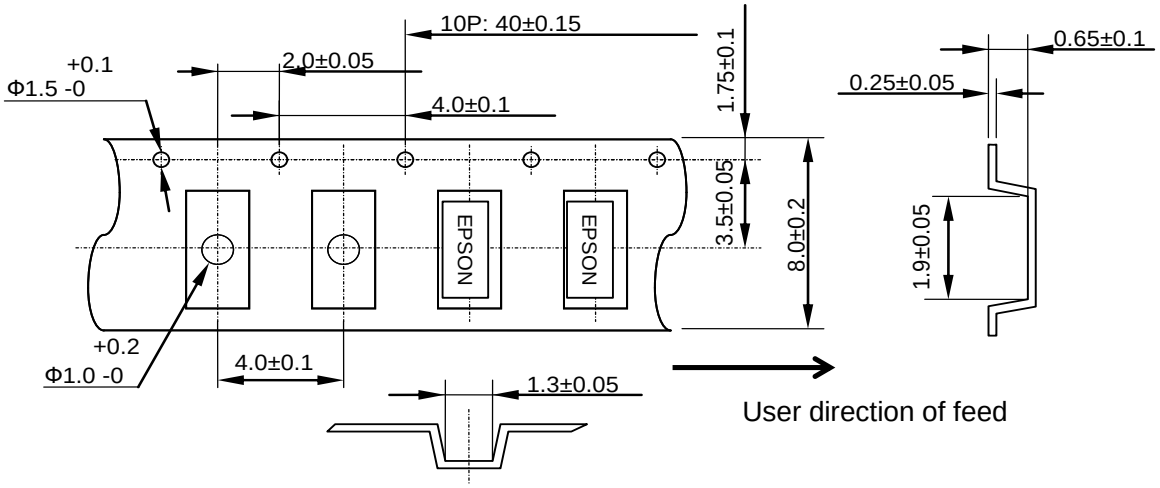


(2) Reel dimensions


Material of the Reel : PS

Unit: mm

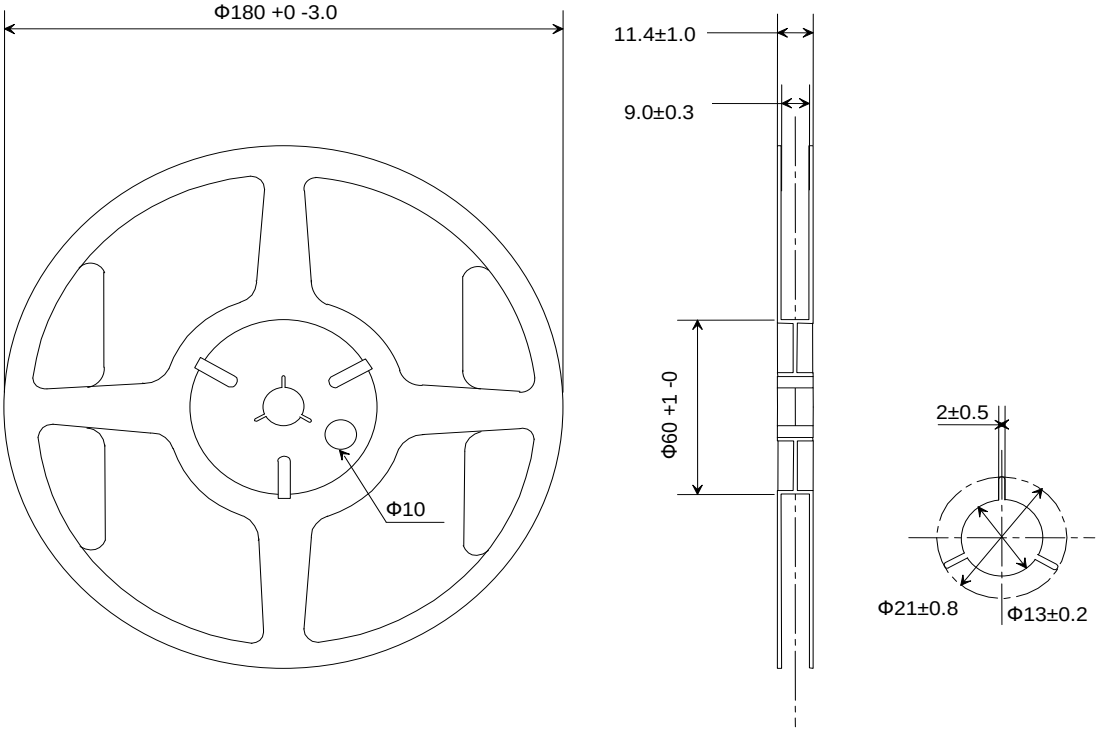

## Reflow profile

Reflow condition (Follow of JEDEC STD-020D.01)

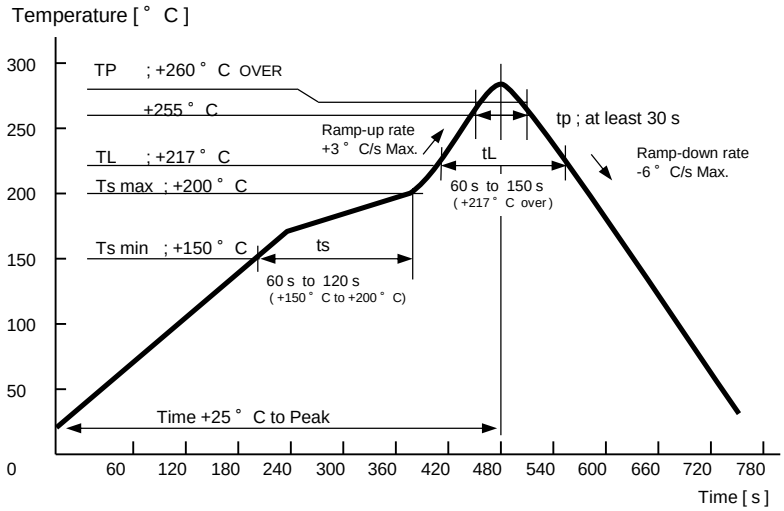


## Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data,circuitry, software, usage, etc. written in this material is intended for reference only.
  Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party.
  This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you
  would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require
  extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
  / Space equipment (artificial satellites, rockets, etc.)
  / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.)
  / Medical instruments to sustain life
  / Submarine transmitters
  / Power stations and related
  / Fire work equipment and security equipment
  / Traffic control equipment
  / And others requiring equivalent reliability.

- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

## Contact us

www5.epsondevice.com/en/contact/